

Livingston Gateway Commons



Traffic Impact Study

Prepared August 27, 2026 · 26.2545, -81.7370

Simple Impact Studies — sample draft

Traffic Impact Study

Generated 2026-08-27T14:56:48.547Z

1.0 EXECUTIVE SUMMARY

This Traffic Impact Study has been prepared to evaluate the potential traffic impact, identify short-term roadway and circulation needs, determine potential mitigation strategies, and identify critical traffic issues that should be addressed during the planning process of the proposed Livingston Gateway Commons, located at Vanderbilt Beach Rd & Livingston Rd, Naples, FL (Collier County), within Collier County, Florida. The host controlling jurisdiction is Collier County (FDOT District 1 (Bartow)); the applicable review framework is Per controlling local government; MTSIH 2024 default if no local TIS procedure. Analysis follows the FDOT Multimodal Transportation Site Impact Handbook (MTSIH, March 25, 2024) and the FDOT Quality/Level of Service Handbook v6.0 (August 2025); capacity analysis computes signalized control delay by the openly-published Webster (1958) uniform-delay formulation with an Akcelik overflow term — the basis of the capacity procedures FDOT Traffic Analysis Handbook §4.1 requires, which a submittal-grade study re-runs in licensed capacity software. The study covers 26 intersections within a 2.50-mile study area for land use 820 (Shopping Center / Retail) at a development size of 120 1,000 sqft GLA.

As part of this Traffic Impact Study, the following assignments were prepared consistent with the FDOT-approved methodology:

- Existing geometric conditions and assessment of the study impact area.
- Traffic data collection — daily volume counts and turning-movement counts at the critical study intersections and site driveways.
- Evaluation of existing traffic operations — Level of Service (LOS) and concurrency analysis.
- Traffic growth analysis, including committed-development assessment.
- Simulation of existing (current-year) and future conditions (opening year 2028) across three scenarios.
- Queue, turn-lane, and preliminary signal-warrant evaluation of the impacted network.

Findings:

- 3 intersections are projected to drop one or more LOS grades under Build conditions.
- 11 intersections operate at LOS E or F under Build conditions; mitigation per MTSIH 2024 §5 should be evaluated.

26	3	11	12.5s
INTERSECTIONS	LOS DROPS	AT LOS E/F	WORST Δ DELAY

2.0 ANALYSIS METHODOLOGY

Per MTSIH 2024 §4.3, methodology and scope are established through a pre-application methodology meeting with the controlling FDOT District, county, and applicable MPO/TPO. Per MTSIH 2024 §4.3, the pre-application methodology meeting establishes scope. The methodology letter or meeting minutes must be included as Appendix A of the formal submittal.

2.1 Controlling Guidance

Primary references: FDOT Multimodal Transportation Site Impact Handbook (MTSIH), March 25, 2024; FDOT Multimodal Transportation Site Impact Applications Guide, June 5, 2024; FDOT Quality/Level of Service Handbook v6.0, August 2025; FDOT Policy 000-525-006 (Level of Service Targets for the State Highway System); FDOT Procedure 525-030-120 (project traffic forecasting); FDOT Traffic Analysis Handbook (TAH), October 2025.

2.2 Analysis Software

Per FDOT TAH §4.1, approved analysis tools are HCS, Synchro / SimTraffic, SIDRA INTERSECTION (roundabouts), CORSIM, and Vissim. This screening analysis applies the openly-published Webster/ Akcelik signalized-intersection model, reported in a format consistent with HCS output conventions. Vistro is not included in the FDOT TAH tool inventory; formal submittal output should be prepared in

HCS or Synchro.

2.3 Traffic Data Collection

Per MTSIH 2024, roadway-segment counts should be 72 consecutive hours (Monday afternoon through Friday morning) in urbanized, transitioning, and urban area classes, and 7 days in rural areas, in 15-minute increments on typical weekdays excluding holiday weeks. The default analysis peak per MTSIH 2024 §2.3.1 is the Weekday PM Peak Hour of Adjacent Street Traffic (one hour between 4–6 PM); MTSIH 2024 imposes no blanket Saturday-peak requirement for retail or restaurant land uses — midday, Saturday, or other special peaks are added only where site characteristics warrant (the Applications Guide fast-food case study analyzes AM + PM + midday). For turning-movement counts, MTSIH 2024 Appendix A (p. A-3) requires AM and PM TMCs covering trucks, pedestrians, and bicycles but does not prescribe duration or bin size; both are agreed at the pre-application methodology meeting. The Applications Guide Case Study 2 (§3.4.3) uses 8-hour TMCs (3 hr AM + 2 hr midday + 3 hr PM) as a worked example, while 2-hr AM and 2-hr PM in 15-minute bins is common Florida practice.

2.4 Analysis Scenarios and Time Horizons

Per MTSIH 2024 §4.3, minimum analysis years are: Existing, Future Background (No-Build), Future Build, and Future Build with Mitigation. This study is organized around three scenarios consistent with FDOT District practice: Scenario 1 — Existing Conditions (current-year); Scenario 2 — Future Conditions No-Build (opening year 2028); and Scenario 3 — Future Conditions Build (opening year 2028). Opening year is canonical; there is no fixed +5 horizon for concurrency or connection-permit work. Each year is explicitly labeled. For a Comprehensive Plan Amendment (CPA) review, the analysis must additionally include short-term (5-year) and long-term (10-year minimum) horizons. Collier County convention: Per MTSIH 2024 §4.3: Existing + Future Background + Future Build + Future Build with Mitigation; opening year canonical.

2.5 Trip Generation

Trip generation follows the public-data screening rates (NHTS 2017 / SANDAG 2002 / NCHRP 716) for land use 820 (Shopping Center / Retail) at the proposed development size of 120 1,000 sqft GLA. Net new external trips are calculated by applying pass-by and internal capture credits to gross trip generation per standard pass-by / internal-capture screening methodology. Per MTSIH 2024 §4.6.4, the fitted-curve equation is preferred when ≥20 data points are available, or when $R^2 \geq 0.75$ with the fitted curve falling within the data cluster and weighted standard deviation > 55% of the weighted average rate; otherwise the weighted average rate applies. Per MTSIH 2024 §4.6.6.6, pass-by trips at a site driveway cannot exceed 10% of the adjacent peak-hour two-way street traffic — this reasonableness check applies per roadway when the site fronts multiple streets and should be verified against the adjacent-street counts at submittal time.

Daily rate applied	80.00 trips per ksf × 120 ksf
AM peak rate applied	3.20 trips per ksf × 120 ksf
PM peak rate applied	8.00 trips per ksf × 120 ksf
Rate source	SANDAG 2002 “(Not So) Brief Guide of Vehicular Traffic Generation Rates for the San Diego Region” — Community Shopping Center (daily 80/ksf; PM pass-by 30%)
Pass-by capture applied	30%
Internal capture applied	0% (MTSIH 2024 §4.6.9 sets no statewide numeric cap; rate negotiated at the methodology meeting per NCHRP 684 / standard screening methodology)
Background growth applied	1.5% per year over 2 year(s)
Collier County TIA threshold	Driveway Category C-G (> 600 vpd including pass-by) triggers pre-application meeting + traffic study per MTSIH 2024 §3.2 / Appendix A
Weather condition	clear

Table: Site Trip Generation Summary

Period	Entering trips	Exiting trips
Daily	4,800	4,800
AM peak hour	234	150
PM peak hour	461	499

Table: Trip Generation by Period (raw → pass-by / internal capture → net external)

Period	Raw	Pass-by	Int. cap.	External	In	Out
AM Peak Hour	384	29	0	320	195	125
PM Peak Hour	960	288	0	605	290	315
Saturday MIDDAY	1,056	79	0	879	440	439

The external / net-external column is net-new vehicle trips assigned to the roadway = (gross – pass-by – internal-capture) × auto-mode share (90.1% for this metro). Walk / bike / transit person-trips are excluded from off-site assignment, so In + Out equals the external column.

2.6 Growth Rate

Per FDOT TAH §2.7, demand projections should use the adopted regional MPO/TPO travel-demand model (TDM); where TDM use is not warranted, historical AADT trend growth from Florida Traffic Online (FTO) is the FDOT-wide convention. Background traffic is grown at 1.5% per year over 2 years for this analysis; the rate should be confirmed against FDOT historical AADT and agreed upon during the methodology meeting.

2.7 Level of Service Standards

Per FDOT Policy 000-525-006, the peak-hour automobile-mode LOS standard on the State Highway System is LOS D in urbanized areas and LOS C in rural and transitioning areas. Constrained or backlogged facilities maintain their facility-specific designation. Roadway segment LOS reporting uses the FDOT Q/LOS Handbook v6.0 Generalized Service Volume Tables (GSVTs). Intersection LOS uses the conventional US signalized control-delay bands: A ≤10s, B ≤20s, C ≤35s, D ≤55s, E ≤80s, F >80s of average control delay per vehicle.

2.8 Context Classification

Per FDOT Q/LOS v6.0 (which replaced "complete streets" terminology with "context-based solutions") and FDM Chapter 200 §200.4 (Table 200.4.1), the study network's context classification (C1 Natural, C2 Rural, C2T Rural Town, C3R Suburban Residential, C3C Suburban Commercial, C4 Urban General, C5 Urban Center, C6 Urban Core) calibrates mode treatments and design standards; cross-section and lane widths follow FDM Table 210.2.1. The controlling context class should be confirmed against the FDOT Preliminary Context Classification mapping during the methodology meeting.

3.0 INTRODUCTION

The proposed Livingston Gateway Commons is located at Vanderbilt Beach Rd & Livingston Rd, Naples, FL (Collier County) within Collier County, in the Florida (statewide) area. The project consists of 120 1,000 sqft GLA under land use 820 (Shopping Center / Retail), and is anticipated to be completed by the opening year 2028.

Project name	Livingston Gateway Commons
Land use	LU 820 — Shopping Center / Retail
Development size	120 1,000 sqft GLA
Site coordinates	26.2545°, -81.7370°
Region	Florida (statewide)
Host jurisdiction	Collier County
FDOT District	FDOT District 1 (Bartow)
Review framework	Per controlling local government; MTSIH 2024 default if no local TIS procedure
Controlling document(s)	MTSIH 2024 + statewide Policy 000-525-006

Regional MPO / TPO
Opening year

Per controlling local government
2028

Surrounding land use, site plan figures, and detailed land-use description are dependent on the final site plan and are not produced by this screening tool. Final submittal should incorporate site plan figures (surrounding intersections and studied area) and a written project description per MTSIH 2024.

3.1 Study Area

The study area comprises the 26 intersections listed below, selected for their proximity to the site and their share of project-generated traffic. Existing lane geometry and traffic control at each location are shown in the Scenario 1 figures (see the turning-movement appendix).

#	Study intersection	Distance (mi)
1	Vanderbilt Beach Road & Oakes Boulevard	0.73
2	Vineyards Boulevard & Vanderbilt Beach Road	0.83
3	Vanderbilt Beach Road & Wilshire Lakes Boulevard	0.83
4	Near Livingston Road	1.12
5	Livingston Road & Vanderbilt Beach Road	1.22
6	Tarpon Bay Boulevard & Immokalee Road	1.26
7	Near Immokalee Road	1.28
8	Immokalee Road & Valewood Drive	1.28
9	Near Immokalee Road	1.32
10	Logan Boulevard North & Vanderbilt Beach Road	1.36
11	Juliet Boulevard & Immokalee Road	1.42
12	Logan Boulevard North & Immokalee Road	1.61
13	Vanderbilt Beach Road & Groves Road	1.63
14	Livingston Road & Immokalee Road	1.64
15	Islandwalk Boulevard & Vanderbilt Beach Road	1.69
16	Livingston Road & Orange Blossom Drive	1.73
17	The Lane & Immokalee Road	1.88
18	Airport-Pulling Road & Tiburon Boulevard East	2.01
19	Airport-Pulling Road & Arielle Drive	2.01
20	Immokalee Road & Preserve Lane	2.09
21	Airport-Pulling Road & Vanderbilt Beach Road	2.12
22	Airport-Pulling Road & Old Groves Road	2.20
23	Immokalee Road & Dancing Wind Lane	2.33

#	Study intersection	Distance (mi)
24	Airport-Pulling Road & Immokalee Road	2.38
25	Osceola Trail & Livingston Road	2.46
26	Airport-Pulling Road & Orange Blossom Drive	2.46

4.0 SCENARIO 1 — EXISTING CONDITIONS

Scenario 1 establishes existing (current-year) conditions from the collected daily and turning-movement counts at the study intersections. Existing Level of Service and control delay are summarized below; existing lane geometry and traffic control are shown in the Scenario 1 turning-movement figures (appendix).

Study intersection	Distance (mi)	Existing LOS	Existing delay (s)
Vanderbilt Beach Road & Oakes Boulevard	0.73	B	19.3
Vineyards Boulevard & Vanderbilt Beach Road	0.83	B	19.6
Vanderbilt Beach Road & Wilshire Lakes Boulevard	0.83	B	19.6
Near Livingston Road	1.12	F	287.0
Livingston Road & Vanderbilt Beach Road	1.22	F	300.0
Tarpon Bay Boulevard & Immokalee Road	1.26	C	21.6
Near Immokalee Road	1.28	C	20.8
Immokalee Road & Valewood Drive	1.28	C	21.6
Near Immokalee Road	1.32	C	21.6
Logan Boulevard North & Vanderbilt Beach Road	1.36	C	26.6
Juliet Boulevard & Immokalee Road	1.42	C	27.0
Logan Boulevard North & Immokalee Road	1.61	C	20.9
Vanderbilt Beach Road & Groves Road	1.63	C	26.7
Livingston Road & Immokalee Road	1.64	F	300.0
Islandwalk Boulevard & Vanderbilt Beach Road	1.69	C	26.4
Livingston Road & Orange Blossom Drive	1.73	F	300.0
The Lane & Immokalee Road	1.88	F	300.0
Airport-Pulling Road & Tiburon Boulevard East	2.01	F	267.1
Airport-Pulling Road & Arielle Drive	2.01	F	267.1
Immokalee Road & Preserve Lane	2.09	C	20.9
Airport-Pulling Road & Vanderbilt Beach Road	2.12	F	267.1

Study intersection	Distance (mi)	Existing LOS	Existing delay (s)
Airport-Pulling Road & Old Groves Road	2.20	F	240.6
Immokalee Road & Dancing Wind Lane	2.33	C	20.9
Airport-Pulling Road & Immokalee Road	2.38	F	300.0
Osceola Trail & Livingston Road	2.46	F	300.0
Airport-Pulling Road & Orange Blossom Drive	2.46	C	22.3

Existing AADT counts and functional classification are seeded from a live query of the FDOT Transportation Data and Analytics (TDA) ArcGIS REST services ([gis.fdot.gov RCI_Layers FeatureServer 0/3/15](https://gis.fdot.gov/RCI_Layers/FeatureServer/0/3/15) + `Access_Management_TDA`) within an 80-meter buffer of each intersection. Where the live extract returns a row, the in-table AADT, AADT year, and access-management class reflect the FDOT-published value at render time. Where no segment is matched (off-SHS local-road intersections, or radii beyond 80 m), values fall back to the engine estimate and must be confirmed against Florida Traffic Online (<https://tdaappsprod.dot.state.fl.us/fto/>). Existing turn-lane storage length must be field-supplied as `existingStorageFt` on each intersection record to enable the \$9.0 storage-bay-adequacy comparison; the renderer surfaces a deficit calculation only when that field is present.

4.1 FDOT TDA Site Snapshot (live)

RCI roadway ID	03175000
Begin/end mileposts	56.280 → 60.550
AADT	92,396 vpd (2025)
K factor (peak-hour)	9.000
D factor (directional)	54.700
Truck %	10.1%
Functional class	Urban Principal Arterial - Interstate
On State Highway System?	No
Access management class	Not classified — interim Rule 14-97.004(1) standards apply
FDOT District	D-1

Live extract from gis.fdot.gov/arcgis/rest/services/RCI_Layers/FeatureServer at render time. Wide-buffer fallback at 500 m (sparse rural corridor or significant offset from nearest RCI segment; treat attribute values as approximate and verify in FTO). Cross-check against Florida Traffic Online (<https://tdaappsprod.dot.state.fl.us/fto/>) for the most recent annual update before submittal.

4.2 Roadway Segments Configuration

Physical and operational characteristics of each study segment from a live FDOT Transportation Data and Analytics (TDA) Roadway Characteristics Inventory (RCI) query at render time. Through-lane count and median type are RCI flat-file attributes not returned by this point query and must be confirmed from the RCI or a field inventory at submittal.

Study segment	RCI roadway	Functional class	SHS	Access cls	K	D
Vanderbilt Beach Road & Oakes Boulevard	03512000	Urban Minor Arterial	—	—	9.000	57.700
Vineyards Boulevard & Vanderbilt Beach Road	03512000	Urban Minor Arterial	—	—	9.000	57.700
Vanderbilt Beach Road & Wilshire Lakes Boulevard	03512000	Urban Minor Arterial	—	—	9.000	57.700
Near Livingston Road	03521000	Urban Minor Arterial	—	—	9.000	57.700

Study segment	RCI roadway	Functional class	SHS	Access cls	K	D
Livingston Road & Vanderbilt Beach Road	03521000	Urban Minor Arterial	—	—	9.000	57.700
Tarpon Bay Boulevard & Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.500	57.700
Near Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.500	57.700
Immokalee Road & Valewood Drive	03590000	Urban Principal Arterial - Other	—	—	9.500	57.700
Near Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.000	57.700
Logan Boulevard North & Vanderbilt Beach Road	03519000	Urban Collector	—	—	9.000	57.700
Juliet Boulevard & Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.000	57.700
Logan Boulevard North & Immokalee Road	03000524	Urban Principal Arterial - Other	—	—	9.000	57.700
Vanderbilt Beach Road & Groves Road	03512000	Urban Minor Arterial	—	—	9.000	57.700
Livingston Road & Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.000	57.700
Islandwalk Boulevard & Vanderbilt Beach Road	03512000	Urban Minor Arterial	—	—	9.000	57.700
Livingston Road & Orange Blossom Drive	03521000	Urban Collector	—	—	9.000	57.700
The Lane & Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.000	57.700
Airport-Pulling Road & Tiburon Boulevard East	03503000	Urban Minor Arterial	—	—	9.000	57.700
Airport-Pulling Road & Arielle Drive	03503000	Urban Minor Arterial	—	—	9.000	57.700
Immokalee Road & Preserve Lane	03590000	Urban Principal Arterial - Other	—	—	9.500	57.700
Airport-Pulling Road & Vanderbilt Beach Road	03503000	Urban Minor Arterial	—	—	9.000	57.700
Airport-Pulling Road & Old Groves Road	03503000	Urban Minor Arterial	—	—	9.000	57.700
Immokalee Road & Dancing Wind Lane	03590000	Urban Principal Arterial - Other	—	—	9.500	57.700
Airport-Pulling Road & Immokalee Road	03590000	Urban Principal Arterial - Other	—	—	9.000	57.700
Osceola Trail & Livingston Road	03521000	Urban Minor Arterial	—	—	9.000	57.700

Study segment	RCI roadway	Functional class	SHS	Access cls	K	D
Airport-Pulling Road & Orange Blossom Drive	03503000	Urban Collector	—	—	9.000	57.700

Live extract from gis.fdot.gov RCI_Layers FeatureServer. Access-management class per Rule 14-97 F.A.C.; functional classification per RCI Feature 121. Confirm lane count, median type, and posted speed from the RCI flat file or a field inventory before submittal.

4.3 Daily Peak-Hour Traffic Volumes (Collected Counts)

Collected daily and peak-hour volumes at the nearest FDOT continuous / short-count monitoring station to each study segment, from a live query of the FDOT TMSCOUNT (Transportation Data & Analytics) service at render time. Volumes are two-way (summed across the station's counted directions); AM = the 08:00 hour and PM = the 17:00 hour of the station's directional hourly counts. A count station is not present at every study intersection; where none falls within range the row is omitted and project-specific counts are required at submittal.

Study segment	Count station	Count yr	AM peak (2-way)	PM peak (2-way)	Daily (2-way)
Near Livingston Road	030191	2026	—	5,360	52,540
Tarpon Bay Boulevard & Immokalee Road	030191	2026	—	5,360	52,540
Near Immokalee Road	030191	2026	—	5,360	52,540
Immokalee Road & Valewood Drive	030191	2026	—	5,360	52,540
Near Immokalee Road	039950	2026	7,238	6,606	103,188
Juliet Boulevard & Immokalee Road	030191	2026	—	5,360	52,540
Livingston Road & Immokalee Road	030191	2026	—	5,360	52,540

Source: FDOT TMSCOUNT TDA FeatureServer (services1.arcgis.com ... Traffic_TMSCOUNT_TDA), nearest station within 1,600 m by highest daily total. These are corridor mid-block monitoring counts, not intersection turning-movement counts; a formal submittal requires AM/PM turning-movement counts at the study intersections and site driveways per MTSIH 2024 Appendix A.

5.0 SCENARIO 2 — FUTURE CONDITIONS NO BUILD (2028)

Scenario 2 represents future background (No-Build) conditions at the opening year 2028: existing volumes grown to the opening year without the proposed project. Background traffic is grown at 1.5% per year over 2 years, and any committed developments in the study area should be added to the No-Build network. The methodology and derivation of the applied growth rate are described in §2.6; the resulting No-Build Level of Service at each study intersection is reported in §7.0 alongside the Existing and Build scenarios.

Where the reviewing agency requires a travel-demand-model forecast (e.g., SERPM for Southeast Florida, or the controlling MPO/TPO model), the No-Build volumes should be reconciled against the adopted model run; the model version, base year, and horizon year are identified in the methodology letter. This screening analysis applies historical-AADT trend growth per FDOT TAH §2.7 in lieu of a model run.

5.1 AADT Growth Projection

Current-year segment AADT (live FDOT RCI, §4.2) is projected to the No-Build horizons at the applied 1.50%/yr compound growth rate derived from the FDOT historical-AADT trend (§2.6). These are screening-level trend projections; the adopted MPO/TPO travel-demand model volumes govern at formal submittal.

Study segment	Current AADT (yr)	CAGR	No-Build AADT (2028)	Design AADT (2048)
Vanderbilt Beach Road & Oakes Boulevard	31,500 (2025)	1.50%	32,939	44,364
Vineyards Boulevard & Vanderbilt Beach Road	31,500 (2025)	1.50%	32,939	44,364
Vanderbilt Beach Road & Wilshire Lakes Boulevard	31,500 (2025)	1.50%	32,939	44,364
Near Livingston Road	32,500 (2025)	1.50%	33,985	45,772
Livingston Road & Vanderbilt Beach Road	40,500 (2025)	1.50%	42,350	57,039
Tarpon Bay Boulevard & Immokalee Road	11,100 (2025)	1.50%	11,607	15,633
Near Immokalee Road	11,100 (2025)	1.50%	11,607	15,633
Immokalee Road & Valewood Drive	11,100 (2025)	1.50%	11,607	15,633
Near Immokalee Road	61,000 (2025)	1.50%	63,786	85,911
Logan Boulevard North & Vanderbilt Beach Road	34,500 (2025)	1.50%	36,076	48,589
Juliet Boulevard & Immokalee Road	61,000 (2025)	1.50%	63,786	85,911
Logan Boulevard North & Immokalee Road	14,900 (2025)	1.50%	15,581	20,985
Vanderbilt Beach Road & Groves Road	31,500 (2025)	1.50%	32,939	44,364
Livingston Road & Immokalee Road	61,000 (2025)	1.50%	63,786	85,911
Islandwalk Boulevard & Vanderbilt Beach Road	31,500 (2025)	1.50%	32,939	44,364
Livingston Road & Orange Blossom Drive	40,500 (2025)	1.50%	42,350	57,039
The Lane & Immokalee Road	61,000 (2025)	1.50%	63,786	85,911
Airport-Pulling Road & Tiburon Boulevard East	30,500 (2025)	1.50%	31,893	42,956
Airport-Pulling Road & Arielle Drive	30,500 (2025)	1.50%	31,893	42,956
Immokalee Road & Preserve Lane	11,100 (2025)	1.50%	11,607	15,633
Airport-Pulling Road & Vanderbilt Beach Road	45,000 (2025)	1.50%	47,056	63,377
Airport-Pulling Road & Old Groves Road	45,000 (2025)	1.50%	47,056	63,377

Study segment	Current AADT (yr)	CAGR	No-Build AADT (2028)	Design AADT (2048)
Immokalee Road & Dancing Wind Lane	11,100 (2025)	1.50%	11,607	15,633
Airport-Pulling Road & Immokalee Road	61,000 (2025)	1.50%	63,786	85,911
Osceola Trail & Livingston Road	33,500 (2025)	1.50%	35,030	47,181
Airport-Pulling Road & Orange Blossom Drive	45,000 (2025)	1.50%	47,056	63,377

Projection = current AADT × (1 + CAGR)^(horizon – count year). Where the live RCI count year is unavailable, the applied growth-years span is used. For submittal, use the per-segment FDOT historical AADT series (Florida Traffic Online) and, where required, the adopted MPO/TPO model volumes.

6.0 SCENARIO 3 — FUTURE CONDITIONS BUILD (2028)

Scenario 3 represents future Build conditions at the opening year 2028: the Scenario 2 No-Build network plus the proposed development's net new external trips at the assigned distribution. Per FDOT TAH §2.7, trip distribution and assignment should use the adopted regional MPO/TPO travel-demand model, with model version, base year, and horizon year identified in the methodology letter. This screening analysis distributes net new external trips to study-area zones with the Caltran gravity model (mass ÷ distance; see §6.1) and assigns them to signalized intersections within the study area; for formal submittal, distribution percentages and the TDM run identifier should be agreed upon during the methodology meeting.

6.1 Trip Distribution — Gravity Model

Project trips are distributed to the surrounding study-area zones with the gravity model used in the Caltran Engineering HCA Westside reference TIS, adopted here as the Florida distribution standard. Each zone attracts trips in proportion to its mass and inversely with its distance from the site — term = $M / (d^{1.1} \cdot d_{\text{site}})$ — normalized so the zone shares sum to 100%. Zone mass M is the intersection through-volume (AADT × K-factor) as the destination-activity attraction proxy; d_{site} (the site zone's own distance normalizer) is 1. The resulting shares set the directional distribution below and drive the project-trip assignment in §6.2.


Directional sector	Share of project trips
Northeast (NNE + ENE)	8%
Southeast (ESE + SSE)	13%
Southwest (SSW + WSW)	39%
Northwest (WNW + NNW)	40%

Study-area zone	Dir.	Distance (mi)	Mass (M)	Gravity term	Trip share
Near Livingston Road	WNW	1.12	2,826	2513.7	8.20%
Livingston Road & Vanderbilt Beach Road	WSW	1.22	2,925	2393.0	7.81%
Livingston Road & Orange Blossom Drive	SSW	1.73	3,645	2102.9	6.86%
Livingston Road & Immokalee Road	NNW	1.64	3,330	2032.3	6.63%

Study-area zone	Dir.	Distance (mi)	Mass (M)	Gravity term	Trip share
The Lane & Immokalee Road	WNW	1.88	3,278	1745.5	5.69%
Airport-Pulling Road & Tiburon Boulevard East	WSW	2.01	2,745	1369.0	4.47%
Airport-Pulling Road & Arielle Drive	WNW	2.01	2,745	1365.9	4.46%
Airport-Pulling Road & Immokalee Road	WNW	2.38	3,225	1357.6	4.43%
Airport-Pulling Road & Vanderbilt Beach Road	WSW	2.12	2,745	1293.8	4.22%
Osceola Trail & Livingston Road	SSW	2.46	3,015	1227.8	4.01%
Airport-Pulling Road & Old Groves Road	WSW	2.20	2,637	1197.0	3.91%
Vanderbilt Beach Road & Oakes Boulevard	SSE	0.73	855	1166.5	3.81%
Vineyards Boulevard & Vanderbilt Beach Road	SSE	0.83	883	1069.6	3.49%
Vanderbilt Beach Road & Wilshire Lakes Boulevard	SSW	0.83	885	1067.6	3.48%
Logan Boulevard North & Vanderbilt Beach Road	ESE	1.36	1,341	984.0	3.21%
Juliet Boulevard & Immokalee Road	NNW	1.42	1,356	953.7	3.11%
Tarpon Bay Boulevard & Immokalee Road	NNW	1.26	1,055	835.7	2.73%
Vanderbilt Beach Road & Groves Road	WSW	1.63	1,344	823.8	2.69%
Immokalee Road & Valewood Drive	NNE	1.28	1,055	821.5	2.68%
Near Immokalee Road	NNW	1.32	1,055	796.4	2.60%

Screening-grade gravity distribution over 26 study-area zones (top 20 by trip share shown). For formal submittal the adopted regional MPO/TPO travel-demand-model distribution and the run identifier are confirmed at the methodology meeting per FDOT TAH §2.7; this gravity worksheet documents the screening basis.

Figure — Directional Distribution of Project Trips

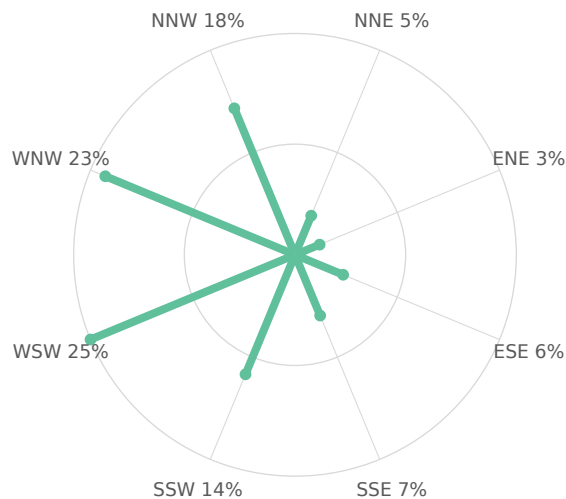


Screening-grade directional distribution of net new project trips by compass octant (spoke length $\propto$ percent of project trips). Derived from the Gravity Model distribution.

Figure — Project Trip Share by Study-Area Zone



Figure — Trip Share vs. Distance from Site (Gravity Decay)

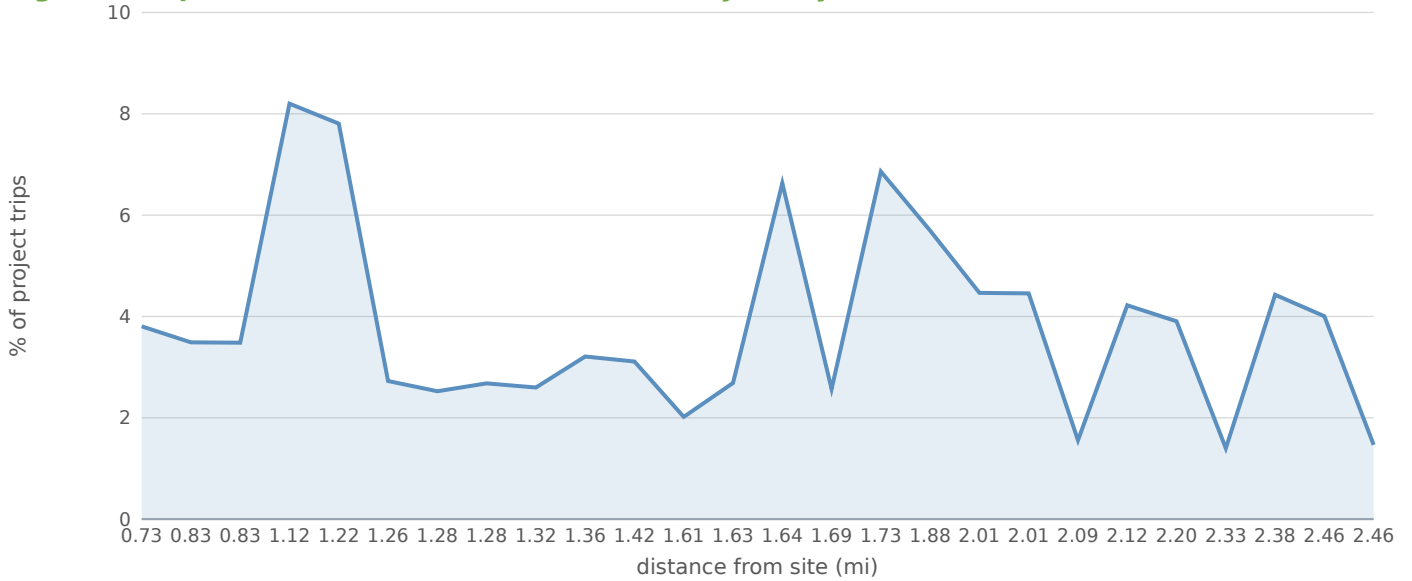

6.2 Project Trip Assignment

Study intersection	Dir.	Distance (mi)	AM trips	PM trips	Share of project
Vanderbilt Beach Road & Oakes Boulevard	SSE	0.73	59	149	15.6%
Vineyards Boulevard & Vanderbilt Beach Road	SSE	0.83	9	14	1.5%
Vanderbilt Beach Road & Wilshire Lakes Boulevard	SSW	0.83	53	134	14.1%
Near Livingston Road	WNW	1.12	2	3	0.3%
Livingston Road & Vanderbilt Beach Road	WSW	1.22	53	134	14.1%
Tarpon Bay Boulevard & Immokalee Road	NNW	1.26	42	62	6.5%
Near Immokalee Road	NNW	1.28	1	1	0.1%
Immokalee Road & Valewood Drive	NNE	1.28	37	83	8.7%
Near Immokalee Road	NNW	1.32	0	1	0.1%
Logan Boulevard North & Vanderbilt Beach Road	ESE	1.36	9	14	1.5%
Juliet Boulevard & Immokalee Road	NNW	1.42	42	62	6.5%
Logan Boulevard North & Immokalee Road	NNE	1.61	0	0	0.0%
Vanderbilt Beach Road & Groves Road	WSW	1.63	31	77	8.1%
Livingston Road & Immokalee Road	NNW	1.64	42	62	6.5%

Study intersection	Dir.	Distance (mi)	AM trips	PM trips	Share of project
Islandwalk Boulevard & Vanderbilt Beach Road	ESE	1.69	9	14	1.5%
Livingston Road & Orange Blossom Drive	SSW	1.73	0	0	0.0%
The Lane & Immokalee Road	WNW	1.88	22	33	3.5%
Airport-Pulling Road & Tiburon Boulevard East	WSW	2.01	0	0	0.0%
Airport-Pulling Road & Arielle Drive	WNW	2.01	0	0	0.0%
Immokalee Road & Preserve Lane	ENE	2.09	0	0	0.0%
Airport-Pulling Road & Vanderbilt Beach Road	WSW	2.12	31	77	8.1%
Airport-Pulling Road & Old Groves Road	WSW	2.20	0	0	0.0%
Immokalee Road & Dancing Wind Lane	ENE	2.33	0	0	0.0%
Airport-Pulling Road & Immokalee Road	WNW	2.38	22	33	3.5%
Osceola Trail & Livingston Road	SSW	2.46	0	0	0.0%
Airport-Pulling Road & Orange Blossom Drive	WSW	2.46	0	0	0.0%

AM- and PM-peak project trips assigned to each study intersection from the §6.1 gravity distribution: the directional shares orient the loading toward the high-share sectors, while distance-decay from the site sets the magnitude that passes through each intersection. Entering/exiting splits at each intersection follow the site's period directional split.

Trip Distribution by Time of Day

Estimated within-day distribution of the 9,600 gross daily trips and the resulting on-site accumulation. Within-day distribution from NHTS 2022 shopping / errand / meal trip start times, cross-checked against public-data time-of-day patterns for LU 820 / 850. Activity builds to a midday plateau and a stronger late-afternoon/evening peak; on-site occupancy peaks midday through the evening.

Figure — Inbound / Outbound Trips by Start Time


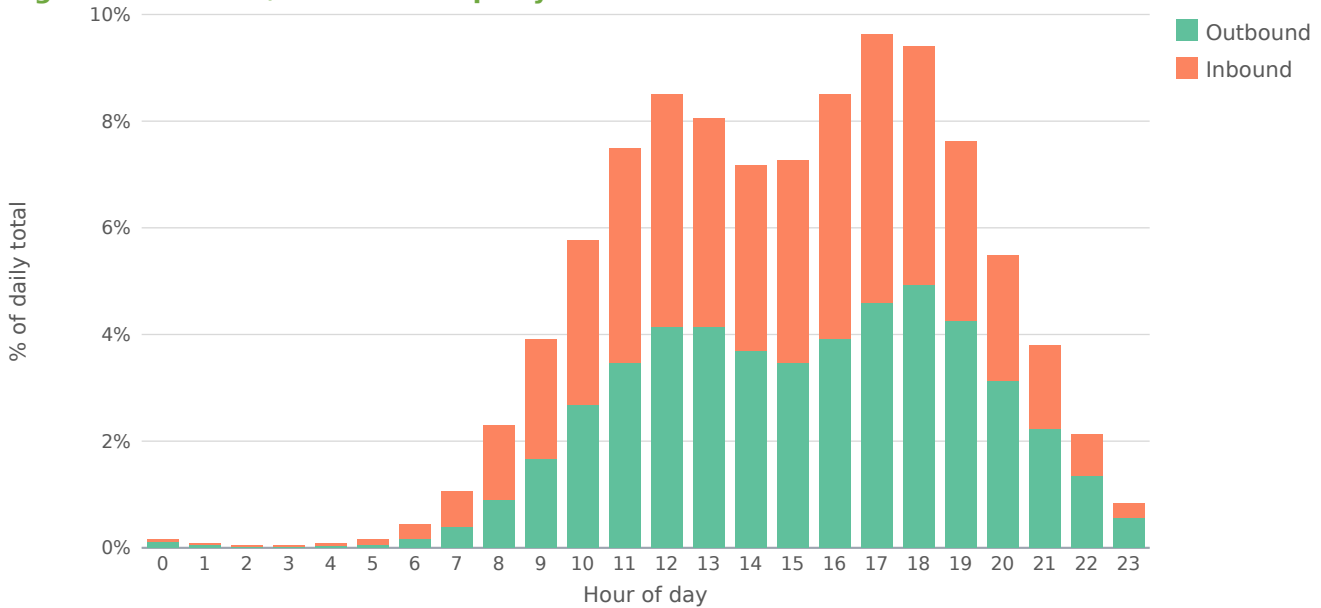


Figure — Daily Trip Accumulation

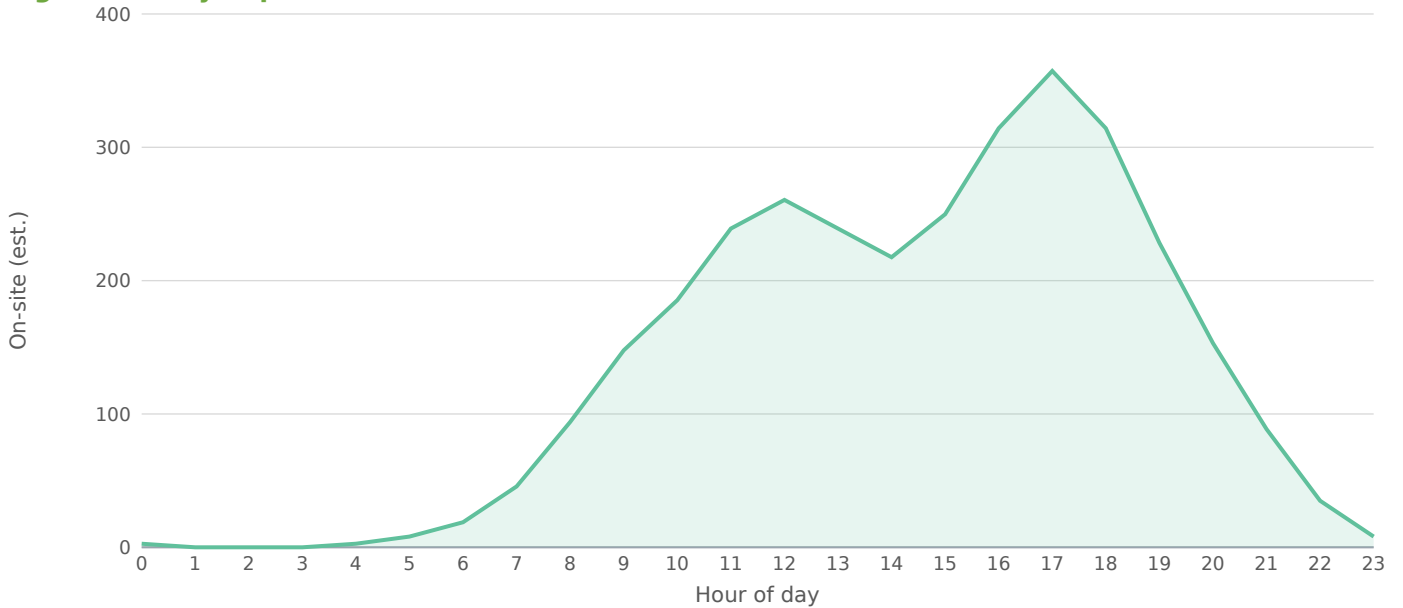

Peak on-site accumulation ~357 at 17:00, from 9,600 gross daily trips on the retail within-day profile. Screening estimate; not a substitute for a calibrated time-of-day model.

7.0 LEVEL OF SERVICE ANALYSIS

Intersection Level of Service is reported across the analysis scenarios against the conventional US signalized control-delay bands republished in state DOT traffic-engineering manuals. Four horizons are evaluated: (1) Existing — Scenario 1 current-year volumes; (2) No-Build — Scenario 2 at opening year 2028; (3) Build — Scenario 3 at opening year 2028; and (4) 20-Year Long-Range (2048) No-Build and Build. A ▲ flag marks any intersection projected to drop a LOS grade under Build conditions.

Intersection	Existing	Opening NB	Opening Bld	Design NB	Design Bld	Δ delay (s)
Vanderbilt Beach Road & Oakes Boulevard	B / 19	B / 20	▲ C / 21	C / 24	C / 27	1.7
Vineyards Boulevard & Vanderbilt Beach Road	B / 20	B / 20	▲ C / 20	C / 24	C / 25	0.1
Vanderbilt Beach Road & Wilshire Lakes Boulevard	B / 20	B / 20	▲ C / 22	C / 24	C / 27	1.6
Near Livingston Road	F / 287	F / 300	F / 300	F / 300	F / 300	0.0
Livingston Road & Vanderbilt Beach Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Tarpon Bay Boulevard & Immokalee Road	C / 22	C / 22	C / 23	C / 30	C / 33	0.9
Near Immokalee Road	C / 21	C / 21	C / 21	C / 28	C / 28	0.0
Immokalee Road & Valewood Drive	C / 22	C / 22	C / 23	C / 30	C / 34	1.3
Near Immokalee Road	C / 22	C / 22	C / 22	C / 30	C / 30	0.0
Logan Boulevard North & Vanderbilt Beach Road	C / 27	C / 28	C / 28	E / 65	E / 67	0.4
Juliet Boulevard & Immokalee Road	C / 27	C / 28	C / 30	E / 69	E / 80	2.0
Logan Boulevard North & Immokalee Road	C / 21	C / 21	C / 21	C / 28	C / 28	0.0
Vanderbilt Beach Road & Groves Road	C / 27	C / 28	C / 30	E / 66	E / 80	2.4
Livingston Road & Immokalee Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Islandwalk Boulevard & Vanderbilt Beach Road	C / 26	C / 27	C / 28	E / 63	E / 65	0.3
Livingston Road & Orange Blossom Drive	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
The Lane & Immokalee Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Airport-Pulling Road & Tiburon Boulevard East	F / 267	F / 288	F / 288	F / 300	F / 300	0.0
Airport-Pulling Road & Arielle Drive	F / 267	F / 288	F / 288	F / 300	F / 300	0.0
Immokalee Road & Preserve Lane	C / 21	C / 21	C / 21	C / 28	C / 28	0.0
Airport-Pulling Road & Vanderbilt Beach Road	F / 267	F / 288	F / 300	F / 300	F / 300	12.5
Airport-Pulling Road & Old Groves Road	F / 241	F / 260	F / 260	F / 300	F / 300	0.0

Intersection	Existing	Opening NB	Opening Bld	Design NB	Design Bld	Δ delay (s)
Immokalee Road & Dancing Wind Lane	C / 21	C / 21	C / 21	C / 28	C / 28	0.0
Airport-Pulling Road & Immokalee Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Osceola Trail & Livingston Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Airport-Pulling Road & Orange Blossom Drive	C / 22	C / 23	C / 23	C / 33	C / 33	0.0

Each scenario cell shows LOS grade / average control delay (s/veh) against the conventional US control-delay bands (A ≤10, B ≤20, C ≤35, D ≤55, E ≤80, F >80 s). Screening delays use a generic signal model (90 s cycle, g/C 0.45, 1,800 pc/h/ln, one critical lane per approach) and are superseded by a calibrated HCS/Synchro analysis of the actual lane geometry and signal timing at submittal.

7.1 Improvement Alternatives

The following intersection improvement alternatives are recommended to address projected Build-condition LOS impacts. Geometric mitigation should be designed to FDOT Design Manual (FDM 2026, Topic No. 625-000-002, dated January 1, 2026) standards — turn-lane warrants, deceleration / storage / taper lengths, intersection sight distance, and median-opening design per FDM Chapter 212; roundabouts per FDM Chapter 213. Proportionate-share, mobility-fee, or developer-contribution amounts for jurisdictions that retain concurrency (e.g., Miami-Dade Chapter 33-G) or operate mobility-fee programs (e.g., Hillsborough, Jacksonville/Duval Chapter 655, Miami-Dade Chapter 33E) should be calculated separately based on the controlling local-government ordinance.

Near Livingston Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Livingston Road & Vanderbilt Beach Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Livingston Road & Immokalee Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Livingston Road & Orange Blossom Drive [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The Lane & Immokalee Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Airport-Pulling Road & Tiburon Boulevard East [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Airport-Pulling Road & Arielle Drive [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Airport-Pulling Road & Vanderbilt Beach Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Airport-Pulling Road & Old Groves Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Airport-Pulling Road & Immokalee Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Osceola Trail & Livingston Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

7.2 Alternative Intersection LOS (with improvement)

The improvement alternatives in §7.1 are sized to mitigate the project's incremental impact and restore each affected intersection to approximately its No-Build (without-project) Level of Service. The table below states the with-improvement objective per location; the achieved Level of Service must be confirmed by a detailed HCS / Synchro analysis of the specific improvement at submittal.

Intersection	Build LOS	Δ delay (s)	Improvement class	Target LOS (improved)
Near Livingston Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Livingston Road & Vanderbilt Beach Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Livingston Road & Immokalee Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Livingston Road & Orange Blossom Drive	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
The Lane & Immokalee Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Airport-Pulling Road & Tiburon Boulevard East	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Airport-Pulling Road & Arielle Drive	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Airport-Pulling Road & Vanderbilt Beach Road	F	12.5	Major (geometry + signal)	F (verify — may remain constrained)
Airport-Pulling Road & Old Groves Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Airport-Pulling Road & Immokalee Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
Osceola Trail & Livingston Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)

Target LOS is the No-Build (without-project) grade the improvement is sized to restore, not a re-run HCM result. Confirm the achieved delay / LOS with a detailed HCS / Synchro analysis of the specific geometry and signal timing at submittal.

8.0 QUEUE ANALYSIS (2028)

The 95th-percentile back-of-queue at each study intersection under Build conditions is summarized below (worst-approach basis). Queues are estimated from the standard cyclic-queue relation (Webster arrival/discharge form); a formal submittal should report per-lane-group queues from a Synchro / SimTraffic run and compare them to the available turn-lane storage evaluated in §9.0.

Intersection	Critical movement	Build Q95 (ft)
Vanderbilt Beach Road & Oakes Boulevard	Worst approach	249
Vineyards Boulevard & Vanderbilt Beach Road	Worst approach	196
Vanderbilt Beach Road & Wilshire Lakes Boulevard	Worst approach	209

Intersection	Critical movement	Build Q95 (ft)
Near Livingston Road	Worst approach	957
Livingston Road & Vanderbilt Beach Road	Worst approach	960
Tarpon Bay Boulevard & Immokalee Road	Worst approach	227
Near Immokalee Road	Worst approach	224
Immokalee Road & Valewood Drive	Worst approach	317
Near Immokalee Road	Worst approach	232
Logan Boulevard North & Vanderbilt Beach Road	Worst approach	280
Juliet Boulevard & Immokalee Road	Worst approach	314
Logan Boulevard North & Immokalee Road	Worst approach	212
Vanderbilt Beach Road & Groves Road	Worst approach	284
Livingston Road & Immokalee Road	Worst approach	1,012
Islandwalk Boulevard & Vanderbilt Beach Road	Worst approach	282
Livingston Road & Orange Blossom Drive	Worst approach	1,308
The Lane & Immokalee Road	Worst approach	939
Airport-Pulling Road & Tiburon Boulevard East	Worst approach	735
Airport-Pulling Road & Arielle Drive	Worst approach	818
Immokalee Road & Preserve Lane	Worst approach	223
Airport-Pulling Road & Vanderbilt Beach Road	Worst approach	884
Airport-Pulling Road & Old Groves Road	Worst approach	889
Immokalee Road & Dancing Wind Lane	Worst approach	218
Airport-Pulling Road & Immokalee Road	Worst approach	1,049
Osceola Trail & Livingston Road	Worst approach	871
Airport-Pulling Road & Orange Blossom Drive	Worst approach	265

9.0 TURN LANE EVALUATION (2028)

Turn-lane evaluation proceeds in two steps per FDM Chapter 212: first whether a turn lane is warranted at each affected approach (a function of the turning volume, opposing/through volume, and speed), and second — where a bay is warranted or already exists — whether its storage length is adequate for the projected queue.

9.1 Turn-Lane Warrants

A turn-lane warrant is a movement-level screen: an exclusive left-turn lane is evaluated against the FDM Chapter 212 / NCHRP 745 left-turn-lane guidelines (a function of advancing volume, opposing volume, and posted speed), and an exclusive right-turn lane is conventionally warranted where the peak-hour right-turn volume exceeds roughly 40–60 vph (or the applicable local threshold, e.g., Collier County land-development code). The proposed development adds approximately 461 inbound and 499 outbound trips in the PM peak hour, distributed to the site driveways and adjacent intersections. This screening decomposes those project-added trips into left / through / right movements at each study intersection — outbound trips enter on the site-facing leg and turn toward

their destination sector, inbound is the mirror — and reports the result in the "Affected movements" table within each intersection's capacity worksheet, where the movement volumes cross-foot with that junction's added-trip total. What the screening does not carry is a measured EXISTING turning-movement split: warrant thresholds apply to the total movement volume (existing plus project), and only the project increment is decomposed here. A definitive turn-lane warrant determination — particularly at the site driveways connecting to the SHS — therefore remains subject to the AM/PM turning-movement counts and the trip distribution approved at the methodology meeting.

9.2 Storage-Bay Adequacy

Where a turn bay is warranted or already present, its storage length must contain the Build-scenario 95th-percentile queue without spill-back into the adjacent through lane; a deficit indicates the bay is shorter than the projected queue and requires either a bay extension (where adjacent infrastructure permits) or a documented engineering finding that the spill-back is acceptable. Deceleration and taper lengths follow FDM Chapter 212.

Storage-bay adequacy: no intersection carries a field-measured existing storage length (``existingStorageFt``). Supply that field on each affected intersection record to enable the Required-vs-Existing-vs-Deficit turn-lane table per FDM Chapter 212 storage / taper standards. Turn-lane warrants at the site driveways must be evaluated against the assigned turning volumes at submittal.

10.0 CONCURRENCY ANALYSIS

Transportation concurrency was made optional statewide by HB 7207 (2011). For new development, the Development of Regional Impact (DRI) review track was further curtailed by SB 1216 / Ch. 2015-30 (which added F.S. 380.06(30) routing otherwise-DRI projects through the State Coordinated Review Process at F.S. 163.3184(4) in lieu of DRI), with cleanup completed by CS/CS/HB 1151 / Ch. 2018-158 — DRI is now a legacy branch retained only for amendments/abandonments of existing DRIs. Collier County review framework: Per controlling local government; MTSIH 2024 default if no local TIS procedure. Controlling document(s): MTSIH 2024 + statewide Policy 000-525-006. LOS standard: SHS LOS D in urbanized areas and LOS C outside urbanized areas per FDOT Policy 000-525-006. Per Florida Statutes §163.3180(5)(h)1.a., local governments must consult with FDOT whenever a Strategic Intermodal System (SIS) facility is expected to be impacted by a comprehensive-plan amendment.

Note. Collier County publishes no TIS supplement to MTSIH 2024 recognized by this screening; county-level practice is administered through pre-application meetings and methodology letters. Confirm the current county land-development code before submittal.

10.1 Roadway Segment Capacity — Generalized Service Volumes

Roadway-segment level of service is screened against the FDOT Quality/Level of Service Handbook v6.0 (August 2025) Generalized Service Volume Tables (GSVTs). Per Q/LOS v6.0 the peak-hour two-way service volume is keyed to FDM Chapter 200 context class (C1-C6, C2T) and through-lane count, with D = 0.55 statewide. The applicable context class and lane count for each segment are FDOT Roadway Characteristics Inventory (RCI) attributes (Feature 126 context class; lane count from the RCI flat file) and must be confirmed during the methodology meeting. This screening tool selects the GSVT row only where those inputs are supplied and otherwise defers the segment v/c rather than assume a class.

Arterial (signalized) peak-hour two-way service volumes (vph) — Q/LOS v6.0 App. B:

Context / lanes	LOS C	LOS D	LOS E
C3C (Suburban Commercial), 2-lane undivided	1,380	1,950	—
C4 (Urban General), 2-lane	1,310	1,710	—
C3C, 4-lane divided	2,760	3,290	—
C4, 4-lane divided	2,070	2,980	—

Context / lanes	LOS C	LOS D	LOS E
C3R (Suburban Residential), 4-lane divided	3,090	3,360	—
C3C, 6-lane divided	4,290	4,870	—
C4, 6-lane divided	3,850	4,560	—
C2T (Rural Town), 2-lane undivided	1,310	1,710	—
C5 (Urban Center), 4-lane	2,350	3,450	3,870
C5, 6-lane	2,560	4,850	5,650
C6 (Urban Core), 4-lane	—	2,710	3,490
C6, 6-lane	—	4,960	5,350

C6 LOS C is undefined in v6.0 (C6 facilities are neither planned nor designed for auto LOS C); cells marked "—" past LOS D are F at signal capacity. Material adjustment multipliers (one-way $\times 1.2$; multilane without exclusive LT $\times 0.75$; 2-lane undivided without exclusive LT $\times 0.80$; non-State signalized $\times 0.90$; exclusive RT lane $\times 1.05$) and per-context K factors (C1/C2/C2T 8.5–10.5%; C3C/C3R/C4 7.5–9.5%; C5/C6 7.0–9.0%) apply per Q/LOS v6.0 Ch. 6. Freeway (Limited Access) GSVT LOS-D capacities: Urbanized 4/6/8-lane = 7,400 / 11,050 / 14,710 vph (AADT-equivalent 82,200 / 122,800 / 163,400); Rural 4-lane divided = 5,950 vph (AADT-equivalent 56,700).

Per-segment GSVT v/c is not computed for this run: a segment context class (C1–C6 / C2T) and through-lane count were not supplied. Provide them as inputs — or rely on the FDOT RCI data adapter once wired — to populate the roadway-segment LOS table against the service volumes above. Segment AADT available to the screen is listed in §4.0.

10.2 Site Access / Ingress-Egress

Per MTSIH 2024 §3.2 Table 5, driveway TIA-scoping is keyed to gross trips per day (including pass-by): Category A 1–20 vpd (single-family); B 21–600 (small multifamily / very small commercial); C 601–1,500 (small-mid retail / small office); D 1,501–4,000 (mid retail / mid office); E 4,001–15,000 (large retail / mixed-use); F 15,001–30,000 (very large mixed-use / mall); G $\geq 30,001$ (regional mall). Pre-application meeting + traffic study are required for Categories C–G (>600 vpd including pass-by). A connection-permit change-of-use is additionally triggered per F.S. 335.182(3)(b) when trip generation increases by >25% AND >100 vpd vs. the existing use. Connection to the FDOT State Highway System requires a connection permit per Rule 14-96 F.A.C. (last amended April 2, 2023). Driveway spacing, median-opening spacing, and signal spacing are governed by the access-management class (Classes 1–7) assigned to the impacted SHS segment per Rule 14-97 F.A.C. and FDOT Procedure 525-030-155; the class is stored in the RCI as Feature 146 / ACMANCLS (codes 00–07; 99 = unclassified, interim standards in Rule 14-97.004(1) apply until assignment). Driveway geometry (W, R, F, Y, G, Driveway Length, S, I; Categories A–D in FDM Chapter 214, Categories E–F–G punt to FDM Chapter 212), turn-lane warrants, deceleration-lane length, and intersection sight distance must be designed to FDOT Design Manual (FDM 2026) standards; off-SHS connections on city/county facilities follow the Florida Greenbook. The access-management class for the impacted SHS facility should be confirmed against the FDOT-published Access Management TDA layer.

11.0 TRANSIT AND MOBILITY

11.1 Transit Service

No transit stops detected within 0.25 mi of the site via the live Transit.land / OSM Overpass query. Verify against the controlling transit agency's published GTFS feed (e.g., Broward County Transit, Miami-Dade Transit, MARTA, LYNX, JTA, HART) at the methodology meeting. If transit-mode reduction is applied to trip generation, the supporting service must be cited and an alternative-mode trip reduction memo retained in the methodology letter (Appendix A or C per jurisdiction).

11.2 Internal Circulation and Multimodal

Internal site circulation, parking access, and service-vehicle pathways depend on the final site plan and are not included in this screening-level analysis. Internal queuing at the principal driveway should be evaluated for adequate storage between the SHS edge of pavement and the first internal

conflict point per FDM guidance. Pedestrian and bicycle connectivity to the surrounding network and to the transit stops above should be confirmed against FDM Chapter 222/223 (sidewalk / bicycle facilities).

12.0 CRASH ANALYSIS

Site-radius crash query against the FDOT SSO Crashes (All) public FeatureServer returned no records within 0.5 mi over the available data window (FDOT public extract is comprehensive through 2018-2019; post-2019 records require Signal4 Analytics agency login). A formal submittal must include the 3-year Crash Analysis Reporting (CAR) extract for the affected intersections — this screening tool's public-data path cannot supply that for current years.

13.0 PRELIMINARY SIGNAL WARRANT ANALYSIS

A preliminary traffic-signal warrant screening is performed against the MUTCD (2009 Edition, FDOT-adopted per the Florida Traffic Engineering Manual) warrants — Warrant 1 (Eight-Hour Vehicular Volume), Warrant 2 (Four-Hour Vehicular Volume), Warrant 3 (Peak Hour), Warrant 4 (Pedestrian), Warrant 5 (School Crossing), Warrant 6 (Coordinated Signal System), Warrant 7 (Crash Experience), and Warrant 8 (Roadway Network). A definitive warrant determination requires the full 8-hour approach-volume counts and the applicable engineering study; a signal is not justified on any single warrant alone without an engineering study demonstrating that a signal will improve the overall safety and/or operation of the intersection.

Based on the projected Build-condition operations, the following study locations should carry a full signal / control-modification warrant analysis (Warrants 1–3 with 8-hour counts, plus Warrant 7 where the §12.0 crash review indicates a correctable pattern) at submittal:

Study location	Build LOS	Δ delay (s)	Preliminary indication
Vanderbilt Beach Road & Oakes Boulevard	C	1.7	Operational review warranted
Vineyards Boulevard & Vanderbilt Beach Road	C	0.1	Operational review warranted
Vanderbilt Beach Road & Wilshire Lakes Boulevard	C	1.6	Operational review warranted
Near Livingston Road	F	0.0	At/over LOS E — monitor
Livingston Road & Vanderbilt Beach Road	F	0.0	At/over LOS E — monitor
Livingston Road & Immokalee Road	F	0.0	At/over LOS E — monitor
Livingston Road & Orange Blossom Drive	F	0.0	At/over LOS E — monitor
The Lane & Immokalee Road	F	0.0	At/over LOS E — monitor
Airport-Pulling Road & Tiburon Boulevard East	F	0.0	At/over LOS E — monitor
Airport-Pulling Road & Arielle Drive	F	0.0	At/over LOS E — monitor
Airport-Pulling Road & Vanderbilt Beach Road	F	12.5	At/over LOS E — monitor
Airport-Pulling Road & Old Groves Road	F	0.0	At/over LOS E — monitor
Airport-Pulling Road & Immokalee Road	F	0.0	At/over LOS E — monitor
Osceola Trail & Livingston Road	F	0.0	At/over LOS E — monitor

Preliminary indication is a screening flag from projected LOS/delay only, not a warrant determination. The site driveways connecting to the SHS must additionally be evaluated for signalization / turn-lane control against the assigned turning volumes and the access-management class per Rule 14-97 F.A.C.

14.0 CONCLUSIONS AND RECOMMENDATIONS

The proposed Livingston Gateway Commons is projected to generate 9,600 daily trips (461 in / 499 out in the PM peak hour) at full build-out. Under Build (Scenario 3) conditions at opening year 2028, 3 study intersections are projected to drop a Level of Service grade and 11 operate at LOS E or F. The improvement alternatives identified in §7.1 should be advanced, and the applicable proportionate-share / mobility-fee obligation should be calculated per the controlling Collier County ordinance to maintain the FDOT SHS LOS standard within the study network.

14.1 Findings

- Project will generate 9,600 new daily vehicle trips, with 960 during the PM peak hour (461 inbound / 499 outbound).
- Pass-by credit 30% and internal-capture credit 0% applied at the PM peak (25% of that credit at the AM and Saturday-midday periods, per the industry rule of thumb that off-peak shopping diverts less) before off-site assignment (standard pass-by methodology; ULI Internal Capture).
- Auto-mode share of 90% applied to external trips for Florida (statewide); 10% of generated trips are assumed to arrive by transit, walking, or cycling and do not load the off-site roadway network. Source: US suburban default (ACS B08301 metropolitan median $\approx$ 90%).
- Existing volumes were grown by 1.50%/yr over 2 years ($\times 1.03$) to the opening-year horizon.
- 26 signalized intersections fall within the study area; 3 are projected to drop at least one LOS grade after build-out.
- 11 intersections are projected to operate at LOS E or F under the build condition and require formal mitigation per Florida Department of Transportation (FDOT) TIS guidance.
- Worst-impact location: Airport-Pulling Road & Vanderbilt Beach Road — projected delay rises 12.5s (LOS F $\rightarrow$ F); 95th-pct queue 884 ft on the critical approach.
- Conclusions are reported at the applied screening assumptions. Discrete-scenario sensitivity at the formal TIA scoping meeting should test: trip-generation method (rate vs. fitted-curve equation); internal capture and pass-by credit variants; and a $\pm 0.5\%$ /yr background growth band around the applied value.

14.2 Programmed Projects

Committed-projects review should consult the FDOT Five-Year Work Program (<https://www.fdot.gov/workprogram>) and the controlling MPO/TPO Transportation Improvement Program (TIP) and Long Range Transportation Plan (LRTP). Programmed roadway and intersection improvements within the study area should be incorporated into the No-Build network. This screening analysis does not automatically integrate Work Program data; manual review is recommended for any submittal.

14.3 Professional Engineer Certification

A Florida TIS / MTIA deliverable must be signed and sealed by a Florida-licensed Professional Engineer per Florida Statutes Chapter 471 and Florida Administrative Code Rule 61G15-23.001. The cover and signature page of the formal submittal must bear the seal, signature, and date of the Engineer of Record.

14.4 Methodology Notes

- Trip generation uses public-data average rates (SANDAG 2002, corroborated by NHTS 2017 / NCHRP 716) for the selected land-use code, computed for AM peak, PM peak, Saturday midday, and daily totals. Saturday-midday rates are estimated as a published industry multiple of the PM peak rate by land-use category.
- Pass-by and internal-capture credits are applied in full at the PM peak (and at 25% of that credit fraction for the AM and Saturday-midday periods) per standard pass-by screening methodology and ULI Mixed-Use Internal Capture defaults; only the residual external vehicle trips are assigned to off-site intersections.
- Existing intersection volumes are grown to the opening-year horizon at the user-supplied annual growth rate (default 1.5%/yr) before the capacity analysis.
- Weather adjustment applies published rain/snow capacity-reduction factors as adopted in US traffic-engineering practice: clear 1.00, light rain 0.95, heavy rain 0.86, light snow 0.86, heavy snow 0.70. The factor multiplies the saturation flow at every intersection.
- Off-site impact is screened for all signalized intersections within the study radius (default 0.5 mi) using the four-step travel demand model (FHWA; NCHRP Report 716). Step 1 Trip Generation: public-data average rates (SANDAG 2002 / NHTS 2017 / NCHRP 716) give the site's external (post pass-by / internal-capture) productions. Step 2 Trip Distribution: the Caltran mass/distance gravity model — the Florida distribution standard (Caltran

Engineering HCA Westside TIS) — allocates trips to surrounding zones by $T_j = (M_j / (d_j \cdot d_{\text{site}})) / \sum (M_x / (d_x \cdot d_{\text{site}}))$, where mass M_j is each signal's through-volume (destination-activity attraction proxy) and d_j is its straight-line distance from the site (site-zone distance normalizer $d_{\text{site}} = 1$). The normalized zone shares set the directional distribution and drive the project-trip assignment. Step 3 Mode Choice: a binary logit $P(\text{auto}) = 1 / (1 + e^{-(\text{ASC} - \lambda \cdot \Delta \text{GC})})$ calibrated to the metro's measured auto-mode share (ACS B08301) and shifted by site urbanity (a density proxy from surrounding through-volumes) so denser, more transit-served sites split further from auto; only the resulting vehicle trips load the network. Step 4 Route Assignment: a capacity-constrained assignment using the BPR volume-delay function $t = t_0 \cdot [1 + 0.15 \cdot (v/c)^4]$ iteratively shifts trips away from over-capacity signals toward less-congested alternatives. Signals lacking AADT data fall back to a constant 5,000 vpd attraction.

- After assignment, all signalized intersections within the study radius are reported in the affected-intersections table. Project-added trips, v/c ratio change, control delay change, LOS change, and 95th-percentile queue are reported for each intersection so the reviewer can assess relative impact. Intersections beyond the study radius are excluded from analysis.

- Auto-mode share is applied per metro before assignment. Suburban-US metros default to 90% auto (ACS 5-Year B08301 median); transit-heavy metros use measured auto-mode share (e.g., NYC 32%, Tokyo 30%, London 38%, San Francisco 47%). Non-auto trips (transit, walking, cycling) do not load the off-site roadway. This is a screening-level adjustment; a real TIS submittal in a transit-heavy market should refine with project-specific TAZ data.

- Candidate signals are de-duplicated within a 45m clustering threshold to prevent OSM divided-arterial splits and way-record artifacts from double-counting a single physical intersection.

- Intersection-level control delay uses the standard signalized-intersection model $d = d_1 + d_2$ (Webster uniform delay + Akçelik time-dependent incremental-delay term, both openly published) with a 90s cycle, $g/C = 0.45$, 1,800 vphpl saturation flow ($\times$ weather factor), 15-minute peak analysis period ($T = 0.25$ hr) and pretimed-signal incremental-delay factor $k = 0.5$. Reported control delay is capped at 300 s (LOS F) for screening reliability — the incremental-delay term is not calibrated far above capacity, so oversaturated approaches are reported as LOS F rather than an implausible delay figure; a calibrated design-level analysis (HCS / Synchro) supersedes this screen.

- Approach-level analysis splits each signal's inflow across NB/SB/EB/WB approaches (deterministic per-signal allocation perturbed $\pm 15\%$ from a 30/25/25/20 base) and assigns added trips to each approach by cosine-similarity to the bearing of the project relative to the signal. Per-approach v/c, control delay, LOS, and 95th-percentile back-of-queue length (standard cyclic-queue relation with Poisson percentile factor: $Q_{95} \approx Q_1 \times 1.65 \times 25 \text{ ft/veh}$) are reported.

- Level of Service is assigned from the conventional US signalized control-delay bands republished in state DOT traffic-engineering manuals: A ≤ 10 s, B ≤ 20 s, C ≤ 35 s, D ≤ 55 s, E ≤ 80 s, F > 80 s.

- Sensitivity is reported in narrative form per standard TIA practice: trip-generation method (rate vs. fitted-curve equation), discrete internal capture and pass-by credit variants, and a $\pm 0.5\%$ /yr growth-rate band around the applied value. The engine retains an internal stochastic-sensitivity routine (Box-Muller-perturbed trip rate and existing volume) for demo-mode diagnostics; it is not surfaced in the deliverable because TIA sensitivity is conducted through discrete scoping-agreed scenario variants, not statistical perturbation of unmeasured distributions.

- Mitigations are screening-level recommendations sized to the projected delay change, not full Synchro/SimTraffic optimization runs. A formal TIS submittal should validate these recommendations with detailed traffic counts and signal-timing analysis.

- Turbo-lane (continuous-green-T) screening flags signalized 3-leg T-intersections where one or more main-street through lanes could flow continuously while the minor-street left turn merges in the median — recovering the green time the through movement would otherwise lose to the signal. Candidacy requires measured 3-leg geometry, an arterial-class main street, and a detected median (divided carriageway), all derived from the OpenStreetMap road network. Approach-capacity gain is computed as $(\text{turbo lanes} / \text{approach lanes}) \times (1 - g/C) / (g/C)$, with the main-street through g/C derived from the modeled main-vs-minor critical-flow split; the result is reported within the $+7\% \dots +173\%$ envelope documented in the continuous-green-T design literature — the standard national references for this geometry (David Plummer & Associates, Adding Turbo Lanes to T-Intersections, 2010; and the Design Guidelines for the Development of Continuous Green Intersections, 1997). Lane counts and signal timing must be field-verified before design.

FOUR-STEP TRAVEL DEMAND MODEL

Off-site project trips are distributed and assigned with the four-step urban transportation modeling process (FHWA; NCHRP Report 716, Travel Demand Forecasting). Each step below shows what the engine computed for this site.

Step 1 — Trip Generation

Public-data screening trip rates (SANDAG 2002, corroborated by NHTS 2017 / NCHRP 716) applied to the proposed land use give the site's productions.

Land use	LU 820 — Shopping Center / Retail
Size	120 1,000 sqft GLA
Daily trips (productions)	9,600
PM peak-hour trips	960 (461 in / 499 out)

Step 2 — Trip Distribution (Gravity Model)

The Caltran mass/distance gravity model (the Florida distribution standard, §6.1) allocates trips to surrounding zones: $T_j = (M_j / (d_j \cdot d_{site})) / \sum (M_x / (d_x \cdot d_{site}))$. Zone mass M_j is each signal's through-volume (destination-activity proxy) and d_j its distance from the site ($d_{site} = 1$). The shares below are the §6.1 distribution.

Signal (attraction zone)	Dist mi	Time min	PM trips	Share
Vanderbilt Beach Road & Oakes Boulevard	0.73	1.8	149	15.6%
Vanderbilt Beach Road & Wilshire Lakes Boulevard	0.83	2.0	134	14.1%
Livingston Road & Vanderbilt Beach Road	1.22	2.9	134	14.1%
Immokalee Road & Valewood Drive	1.28	3.1	83	8.7%
Vanderbilt Beach Road & Groves Road	1.63	3.9	77	8.1%
Airport-Pulling Road & Vanderbilt Beach Road	2.12	5.1	77	8.1%
Tarpon Bay Boulevard & Immokalee Road	1.26	3.0	62	6.5%
Juliet Boulevard & Immokalee Road	1.42	3.4	62	6.5%
Livingston Road & Immokalee Road	1.64	3.9	62	6.5%
The Lane & Immokalee Road	1.88	4.5	33	3.5%
Airport-Pulling Road & Immokalee Road	2.38	5.7	33	3.5%
Vineyards Boulevard & Vanderbilt Beach Road	0.83	2.0	14	1.5%

Top 12 distribution zones by assigned PM-peak trips shown; the full set is in the capacity appendix.

Step 3 — Mode Choice

Auto-mode share 90% applied via a binary logit $P(\text{auto}) = 1 / (1 + e^{-(ASC - \lambda \cdot \Delta GC)})$ calibrated to the metro's measured auto-mode share (ACS B08301) and shifted by site urbanity (local density), so a denser, more transit-served site splits further from auto than a greenfield parcel in the same metro. The remaining 10% of trips (transit, walking, cycling) do not load the off-site roadway network; only auto trips are carried into Step 4.

Step 4 — Route Assignment

Project trips are routed over the local road network by shortest path and loaded with a capacity-constrained BPR equilibrium (volume-delay $t = t_0 \cdot [1 + 0.15 \cdot (v/c)^4]$, Method of Successive Averages), so congested links shift trips toward alternative routes. 100% of study signals lie on a modeled route; highest loaded-link v/c : 0.74. Corridors carrying the project trips:

Corridor (road class)	Loaded length mi	PM project vph	v/c
Collector	3.52	605	0.74
Minor arterial	3.57	312	0.23
Principal arterial	8.72	168	0.19

Network shortest-path assignment over the OSM road graph within the study area; per-signal v/c, delay, LOS, and queue are in the capacity appendix.

Conserved assignment: project trips routed to 9 cordon gateways on the study boundary (weighted by the directional distribution above). Flow conservation verified at render input: Σ entering = Σ leaving at 324 network junctions, max imbalance 0.00 veh. 14 study intersection(s) carry path-derived movements; 12 retain the geometric octant model (labeled per intersection).

APPENDIX — INTERSECTION CAPACITY ANALYSIS WORKSHEETS


One worksheet per study intersection: a turning-movement diagram for each analyzed peak period plus the per-approach capacity table. Analysis uses the openly-published Webster/Akcelik signalized control-delay method; v/c, control delay (sec/veh), Level of Service, and 95th-percentile back-of-queue (ft) are reported for the Existing (No-Build) and Build conditions.

Background turning-movement volumes in the diagrams are distributed from each approach total using an estimated 15/70/15 (Left/Through/Right) split. Project-trip movements are assigned geometrically from the study's directional trip distribution (see each worksheet's Affected movements table). Replace both with measured turning-movement counts (TMCs) before a formal submittal.

A.1 Vanderbilt Beach Road & Oakes Boulevard

Signal ID	florida-statewide-28673
Location	SE Florida (statewide) · 0.73 mi from site
Added PM peak trips	149
Existing / No-Build (PM)	LOS B · 19.6 s/veh · v/c 0.49
Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Δ control delay	+1.7 s/veh (LOS change)
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

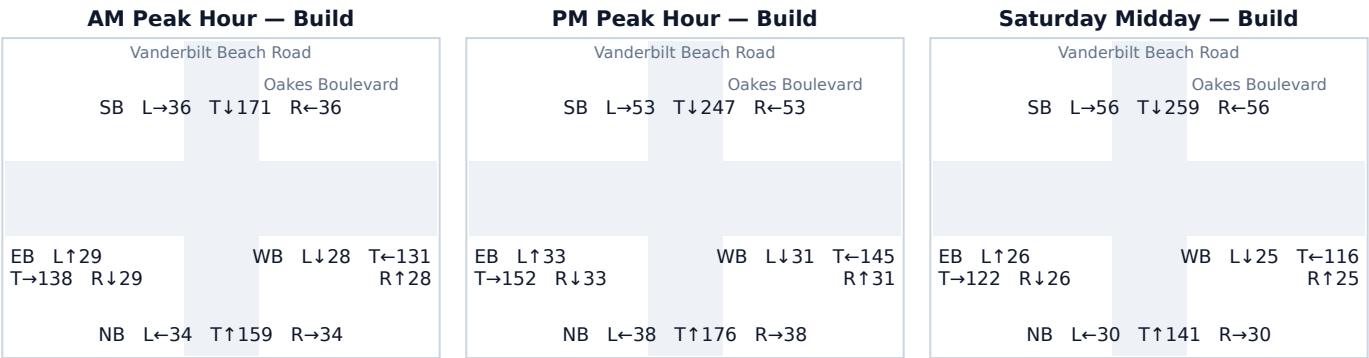

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	252	0	252	0.31 → 0.31	16.8 → 16.8	B → B	166
SB	204	149	353	0.25 → 0.44	16.1 → 18.6	B → B	249
EB	218	0	218	0.27 → 0.27	16.3 → 16.3	B → B	141
WB	207	0	207	0.26 → 0.26	16.1 → 16.1	B → B	133

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
SB Right	134	90%
SB Through	15	10%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.2 Vanderbilt Beach Road & Wilshire Lakes Boulevard

Signal ID	florida-statewide-19631
Location	SE Florida (statewide) · 0.83 mi from site
Added PM peak trips	134
Existing / No-Build (PM)	LOS B · 19.9 s/veh · v/c 0.51
Build (PM)	LOS C · 21.5 s/veh · v/c 0.58
Δ control delay	+1.6 s/veh (LOS change)
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

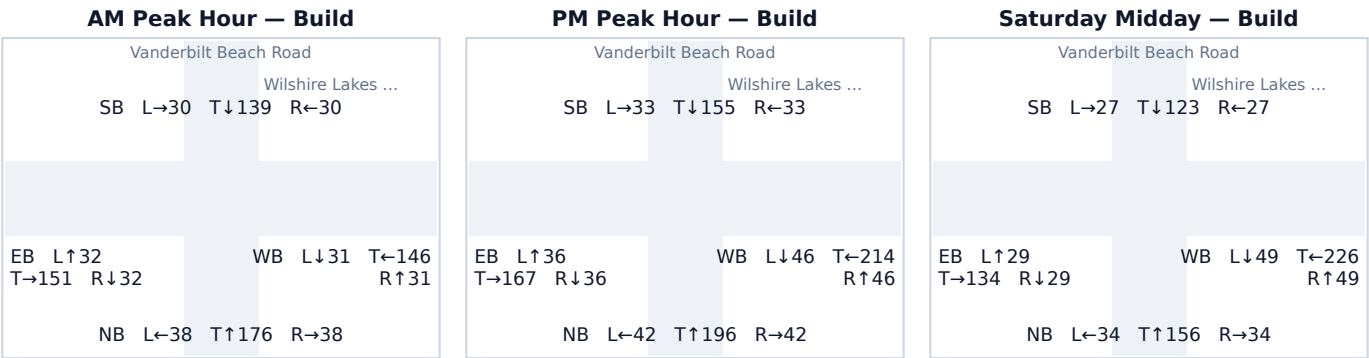

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	280	0	280	0.35 → 0.35	17.3 → 17.3	B → B	188
SB	221	0	221	0.27 → 0.27	16.3 → 16.3	B → B	143
EB	239	0	239	0.30 → 0.30	16.6 → 16.6	B → B	157
WB	172	134	306	0.21 → 0.38	15.6 → 17.7	B → B	209

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	134	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.3 Vineyards Boulevard & Vanderbilt Beach Road

Signal ID	florida-statewide-28995
Location	SE Florida (statewide) · 0.83 mi from site
Added PM peak trips	14
Existing / No-Build (PM)	LOS B · 19.9 s/veh · v/c 0.51
Build (PM)	LOS C · 20.0 s/veh · v/c 0.51
Δ control delay	+0.1 s/veh (LOS change)
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

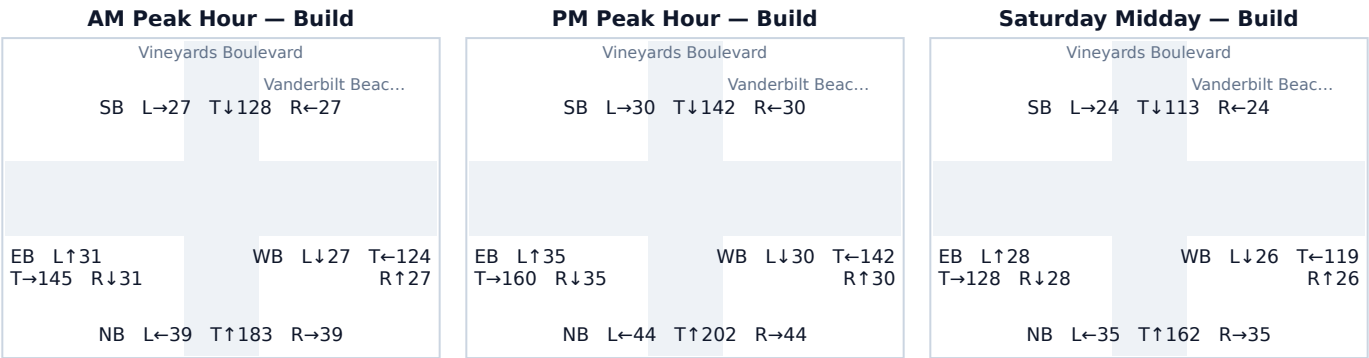

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	290	0	290	0.36 → 0.36	17.5 → 17.5	B → B	196
SB	202	0	202	0.25 → 0.25	16.1 → 16.1	B → B	129
EB	230	0	230	0.28 → 0.28	16.5 → 16.5	B → B	150
WB	188	14	202	0.23 → 0.25	15.9 → 16.1	B → B	129

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	14	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.4 Airport-Pulling Road & Vanderbilt Beach Road

Signal ID	florida-statewide-19627
Location	SE Florida (statewide) · 2.12 mi from site
Added PM peak trips	77
Existing / No-Build (PM)	LOS F · 287.5 s/veh · v/c 1.57
Build (PM)	LOS F · 300.0 s/veh · v/c 1.61
Δ control delay	+12.5 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

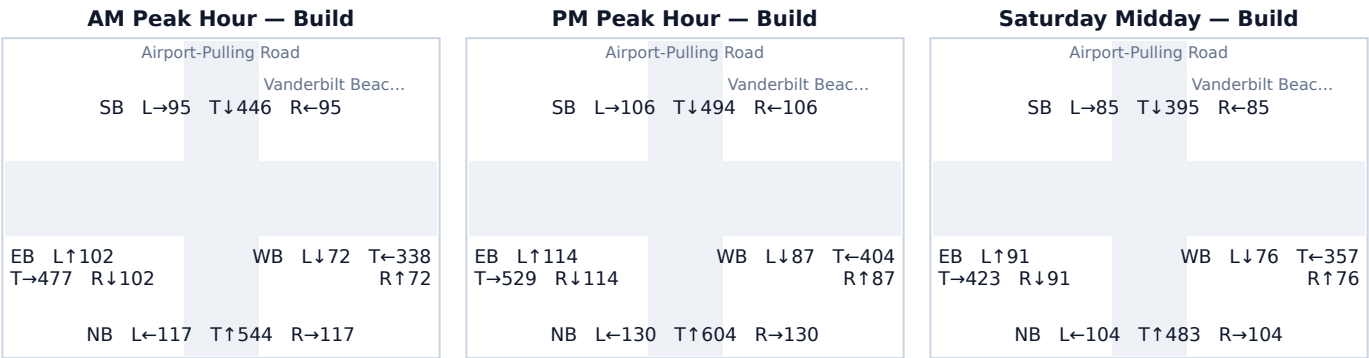

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	864	0	864	1.07 → 1.07	75.4 → 75.4	E → E	884
SB	706	0	706	0.87 → 0.87	34.9 → 34.9	C → C	660
EB	757	0	757	0.93 → 0.93	42.6 → 42.6	D → D	740
WB	501	77	578	0.62 → 0.71	22.4 → 25.4	C → C	483

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	77	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.5 Vanderbilt Beach Road & Groves Road

Signal ID	florida-statewide-31226
Location	SE Florida (statewide) · 1.63 mi from site
Added PM peak trips	77
Existing / No-Build (PM)	LOS C · 27.8 s/veh · v/c 0.77
Build (PM)	LOS C · 30.2 s/veh · v/c 0.81
Δ control delay	+2.4 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

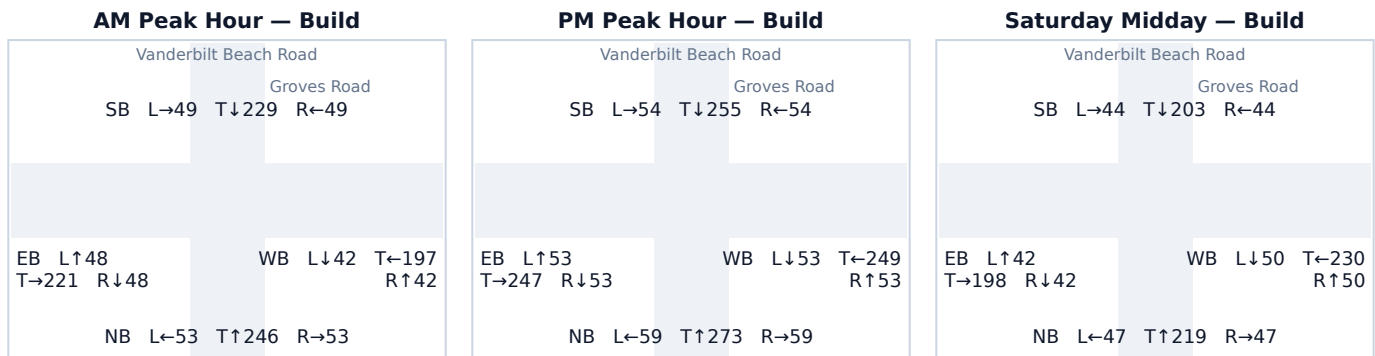

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	391	0	391	0.48 → 0.48	19.4 → 19.4	B → B	284
SB	363	0	363	0.45 → 0.45	18.8 → 18.8	B → B	258
EB	353	0	353	0.44 → 0.44	18.6 → 18.6	B → B	249
WB	278	77	355	0.34 → 0.44	17.3 → 18.7	B → B	251

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	77	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.6 Juliet Boulevard & Immokalee Road

Signal ID	florida-statewide-27814
Location	SE Florida (statewide) · 1.42 mi from site
Added PM peak trips	62
Existing / No-Build (PM)	LOS C · 28.1 s/veh · v/c 0.78
Build (PM)	LOS C · 30.1 s/veh · v/c 0.81
Δ control delay	+2.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

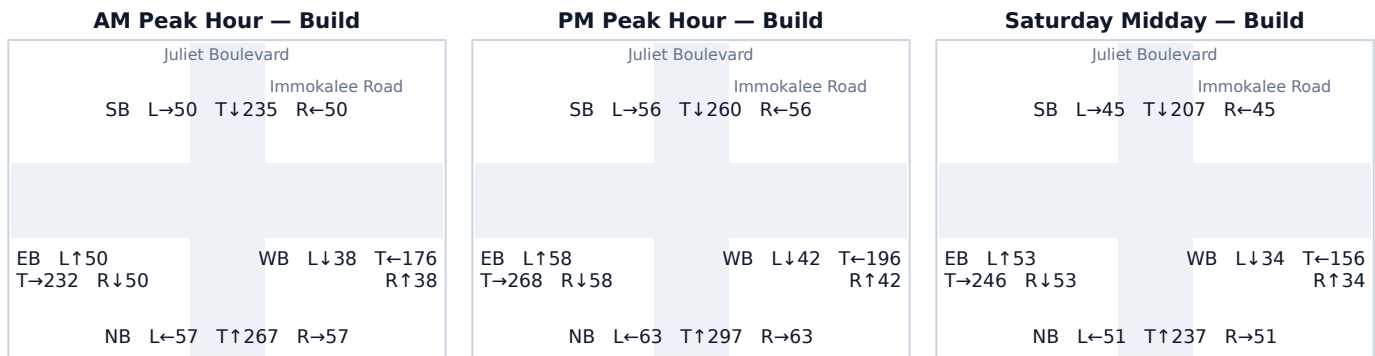

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	423	0	423	0.52 → 0.52	20.2 → 20.2	C → C	314
SB	372	0	372	0.46 → 0.46	19.0 → 19.0	B → B	266
EB	322	62	384	0.40 → 0.47	18.0 → 19.3	B → B	277
WB	280	0	280	0.35 → 0.35	17.3 → 17.3	B → B	188

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	62	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.7 Immokalee Road & Valewood Drive

Signal ID	florida-statewide-17594
Location	SE Florida (statewide) · 1.28 mi from site
Added PM peak trips	83
Existing / No-Build (PM)	LOS C · 22.0 s/veh · v/c 0.60
Build (PM)	LOS C · 23.3 s/veh · v/c 0.65
Δ control delay	+1.3 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

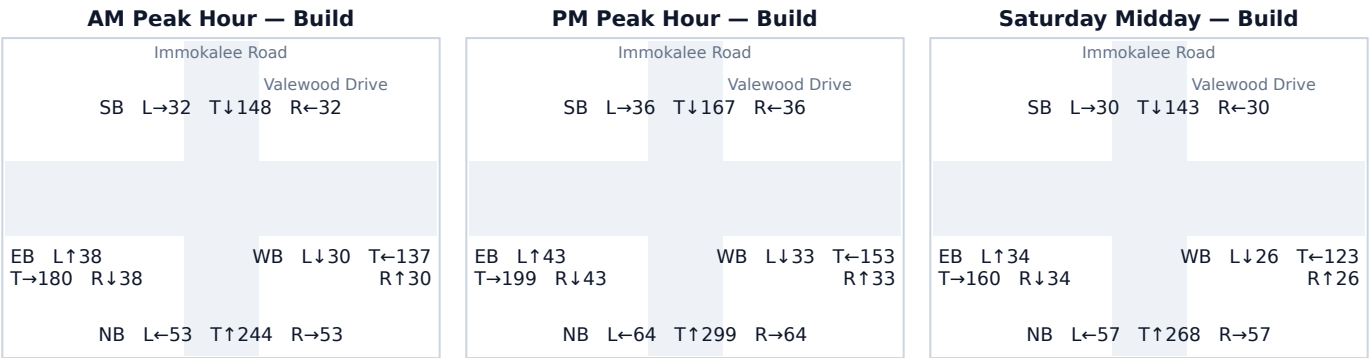

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	360	68	427	0.44 → 0.53	18.8 → 20.3	B → C	317
SB	224	15	239	0.28 → 0.30	16.4 → 16.6	B → B	157
EB	285	0	285	0.35 → 0.35	17.4 → 17.4	B → B	192
WB	219	0	219	0.27 → 0.27	16.3 → 16.3	B → B	141

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
NB Through	68	82%
SB Through	15	18%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.8 Tarpon Bay Boulevard & Immokalee Road

Signal ID	florida-statewide-17593
Location	SE Florida (statewide) · 1.26 mi from site
Added PM peak trips	62
Existing / No-Build (PM)	LOS C · 22.0 s/veh · v/c 0.60
Build (PM)	LOS C · 22.9 s/veh · v/c 0.64
Δ control delay	+0.9 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

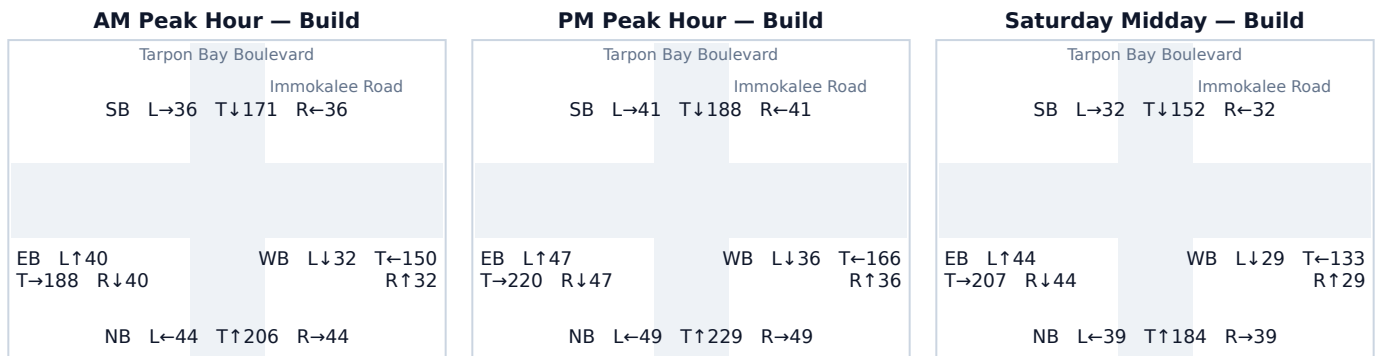

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	327	0	327	0.40 → 0.40	18.1 → 18.1	B → B	227
SB	270	0	270	0.33 → 0.33	17.1 → 17.1	B → B	180
EB	252	62	314	0.31 → 0.39	16.8 → 17.9	B → B	216
WB	238	0	238	0.29 → 0.29	16.6 → 16.6	B → B	156

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	62	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.9 Logan Boulevard North & Vanderbilt Beach Road

Signal ID	florida-statewide-19669
Location	SE Florida (statewide) · 1.36 mi from site
Added PM peak trips	14
Existing / No-Build (PM)	LOS C · 27.7 s/veh · v/c 0.77
Build (PM)	LOS C · 28.1 s/veh · v/c 0.78
Δ control delay	+0.4 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

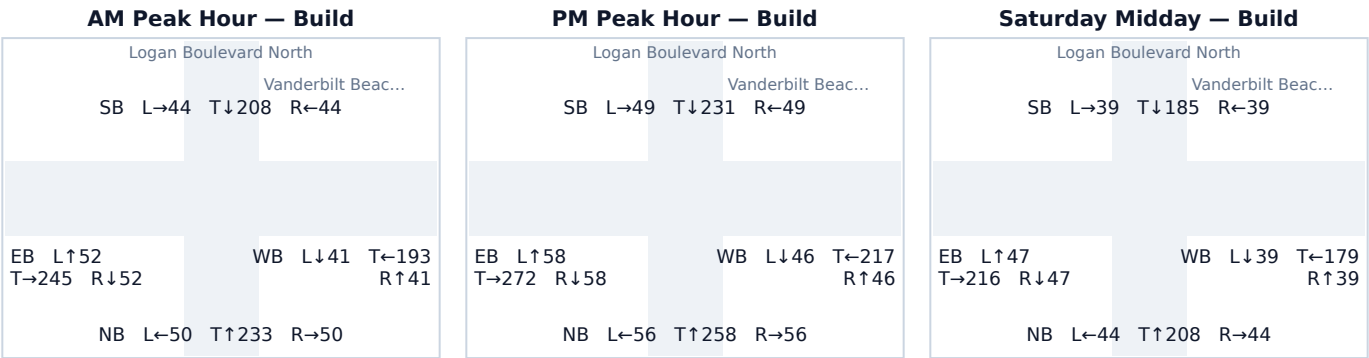

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	370	0	370	0.46 → 0.46	19.0 → 19.0	B → B	264
SB	329	0	329	0.41 → 0.41	18.2 → 18.2	B → B	229
EB	388	0	388	0.48 → 0.48	19.4 → 19.4	B → B	280
WB	295	14	309	0.36 → 0.38	17.5 → 17.8	B → B	211

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	14	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.10 Islandwalk Boulevard & Vanderbilt Beach Road

Signal ID	florida-statewide-37709
Location	SE Florida (statewide) · 1.69 mi from site
Added PM peak trips	14
Existing / No-Build (PM)	LOS C · 27.4 s/veh · v/c 0.76
Build (PM)	LOS C · 27.7 s/veh · v/c 0.77
Δ control delay	+0.3 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

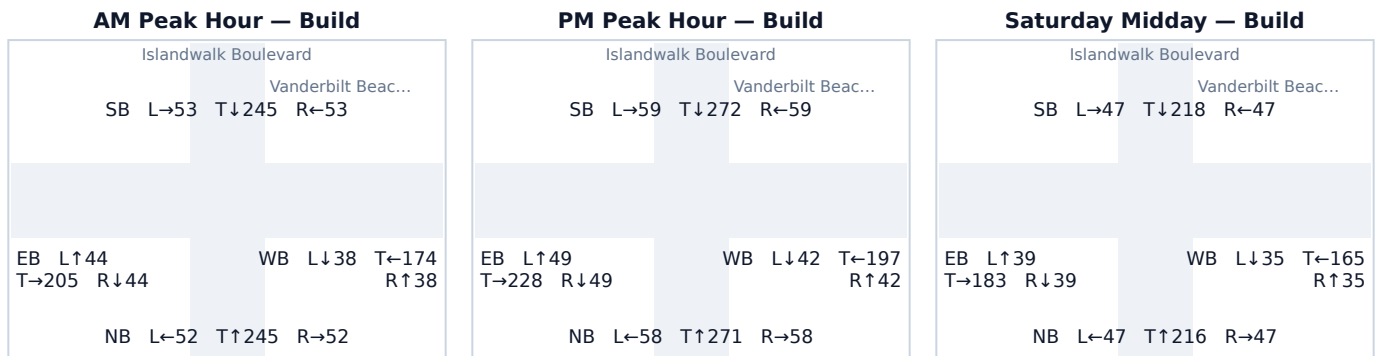

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	387	0	387	0.48 → 0.48	19.4 → 19.4	B → B	280
SB	390	0	390	0.48 → 0.48	19.4 → 19.4	B → B	282
EB	326	0	326	0.40 → 0.40	18.1 → 18.1	B → B	226
WB	267	14	281	0.33 → 0.35	17.1 → 17.3	B → B	189

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	14	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.11 Near Livingston Road

Signal ID	florida-statewide-17797
Location	SE Florida (statewide) · 1.12 mi from site
Added PM peak trips	3
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.62
Build (PM)	LOS F · 300.0 s/veh · v/c 1.62
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

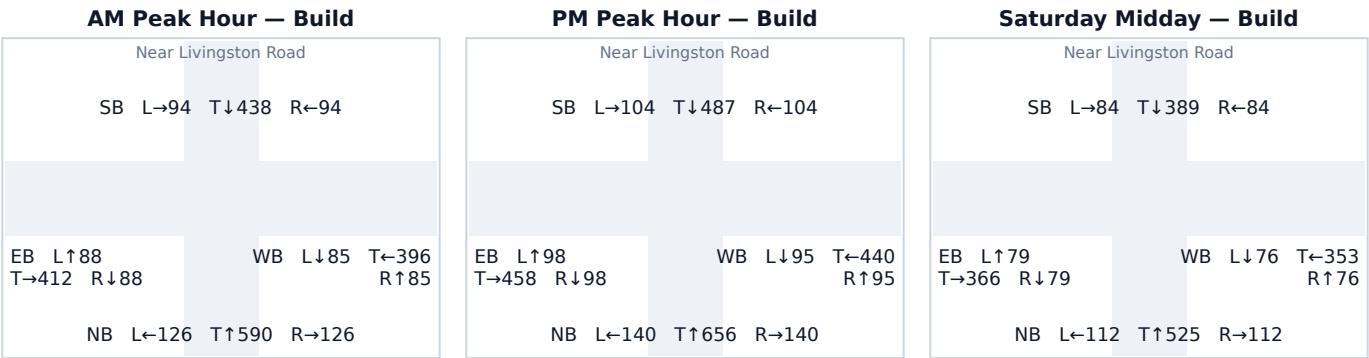

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	936	0	936	1.16 → 1.16	108.3 → 108.3	F → F	957
SB	695	0	695	0.86 → 0.86	33.6 → 33.6	C → C	643
EB	653	1	654	0.81 → 0.81	29.8 → 29.8	C → C	582
WB	628	2	630	0.78 → 0.78	28.1 → 28.2	C → C	549

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	1	33%
EB Through	1	33%
WB Right	1	33%


Source: geometric octant model (this signal did not resolve to a junction on the modeled road network — no junction within 100 m, or its minor legs are below the network's road-class floor).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.12 Livingston Road & Vanderbilt Beach Road

Signal ID	florida-statewide-19587
Location	SE Florida (statewide) · 1.22 mi from site
Added PM peak trips	134
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.67
Build (PM)	LOS F · 300.0 s/veh · v/c 1.75
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

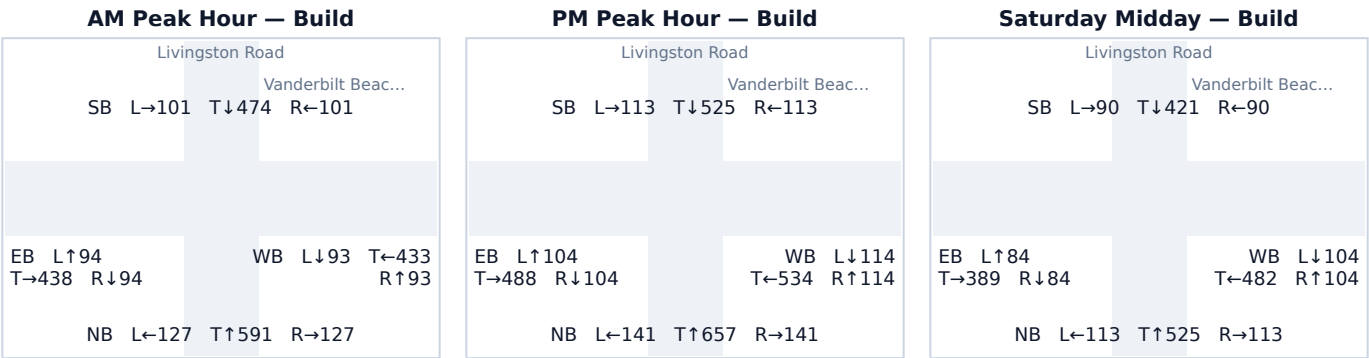

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	939	0	939	1.16 → 1.16	109.7 → 109.7	F → F	960
SB	751	0	751	0.93 → 0.93	41.5 → 41.5	D → D	730
EB	696	0	696	0.86 → 0.86	33.6 → 33.6	C → C	643
WB	629	134	762	0.78 → 0.94	28.1 → 43.8	C → D	750

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	134	100%


Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.13 Near Immokalee Road

Signal ID	florida-statewide-2081
Location	SE Florida (statewide) · 1.28 mi from site
Added PM peak trips	1
Existing / No-Build (PM)	LOS C · 21.1 s/veh · v/c 0.57
Build (PM)	LOS C · 21.1 s/veh · v/c 0.57
Δ control delay	+0.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

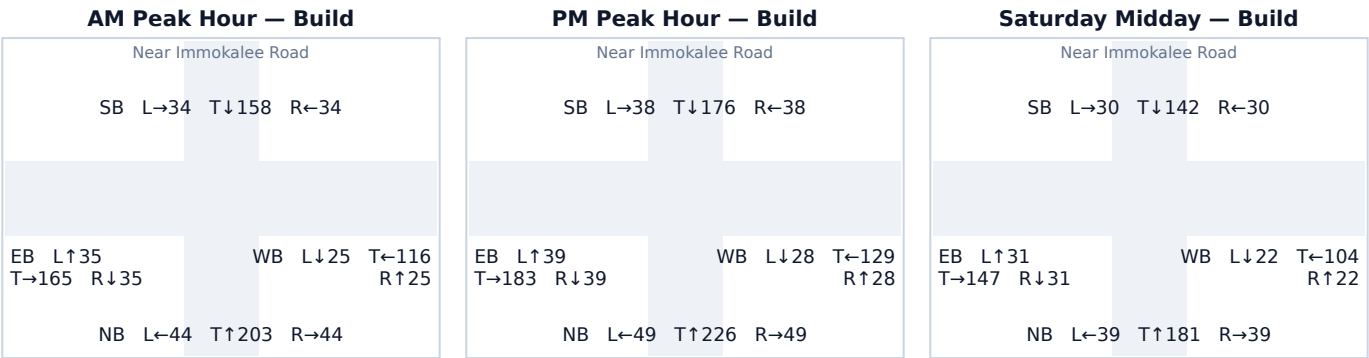

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	323	1	324	0.40 → 0.40	18.1 → 18.1	B → B	224
SB	251	0	252	0.31 → 0.31	16.8 → 16.8	B → B	166
EB	261	0	261	0.32 → 0.32	17.0 → 17.0	B → B	173
WB	185	0	185	0.23 → 0.23	15.8 → 15.8	B → B	117

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
NB Through	1	100%

Source: geometric octant model (this signal did not resolve to a junction on the modeled road network — no junction within 100 m, or its minor legs are below the network's road-class floor).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.14 Near Immokalee Road

Signal ID

Location

Added PM peak trips

Existing / No-Build (PM)

Build (PM)

Δ control delay

Mitigation

florida-statewide-30909

SE Florida (statewide) · 1.32 mi from site

1


LOS C · 22.0 s/veh · v/c 0.60

LOS C · 22.0 s/veh · v/c 0.60

+0.0 s/veh

No mitigation required — projected delay change is below the City's 5-second TIS threshold.

Turning-Movement Diagrams (Build condition)

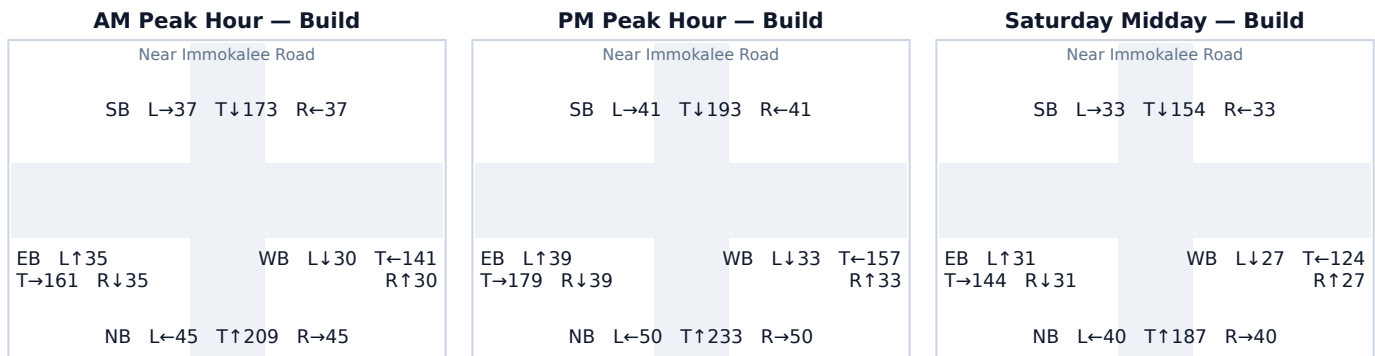

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	332	1	333	0.41 → 0.41	18.2 → 18.2	B → B	232
SB	275	0	275	0.34 → 0.34	17.2 → 17.2	B → B	184
EB	257	0	257	0.32 → 0.32	16.9 → 16.9	B → B	170
WB	223	0	223	0.28 → 0.28	16.4 → 16.4	B → B	144

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
NB Through	1	100%

Source: geometric octant model (this signal did not resolve to a junction on the modeled road network — no junction within 100 m, or its minor legs are below the network's road-class floor).


Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.15 Logan Boulevard North & Immokalee Road

Signal ID	florida-statewide-17596
Location	SE Florida (statewide) · 1.61 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Δ control delay	+0.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

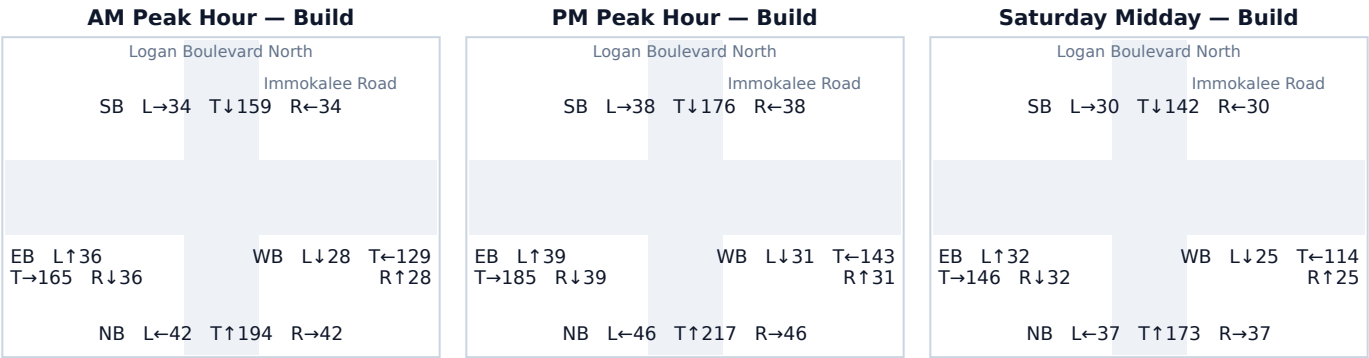

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)


Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	309	< 1	309	0.38 → 0.38	17.8 → 17.8	B → B	212
SB	252	0	252	0.31 → 0.31	16.8 → 16.8	B → B	166
EB	263	0	263	0.32 → 0.32	17.0 → 17.0	B → B	175
WB	205	0	205	0.25 → 0.25	16.1 → 16.1	B → B	131

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.16 Livingston Road & Immokalee Road

Signal ID	florida-statewide-17571
Location	SE Florida (statewide) · 1.64 mi from site
Added PM peak trips	62
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.91
Build (PM)	LOS F · 300.0 s/veh · v/c 1.94
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

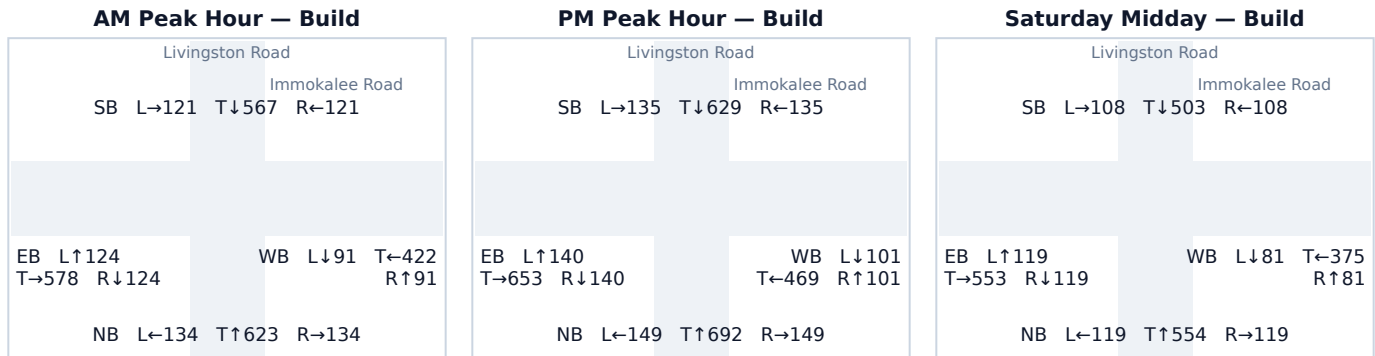

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	990	0	990	1.22 → 1.22	135.3 → 135.3	F → F	1,012
SB	899	0	899	1.11 → 1.11	90.8 → 90.8	F → F	920
EB	871	62	933	1.08 → 1.15	78.6 → 107.1	E → F	955
WB	671	0	671	0.83 → 0.83	31.2 → 31.2	C → C	606

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	62	100%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).


Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.17 Livingston Road & Orange Blossom Drive

Signal ID	florida-statewide-37708
Location	SE Florida (statewide) · 1.73 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 2.09
Build (PM)	LOS F · 300.0 s/veh · v/c 2.09
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

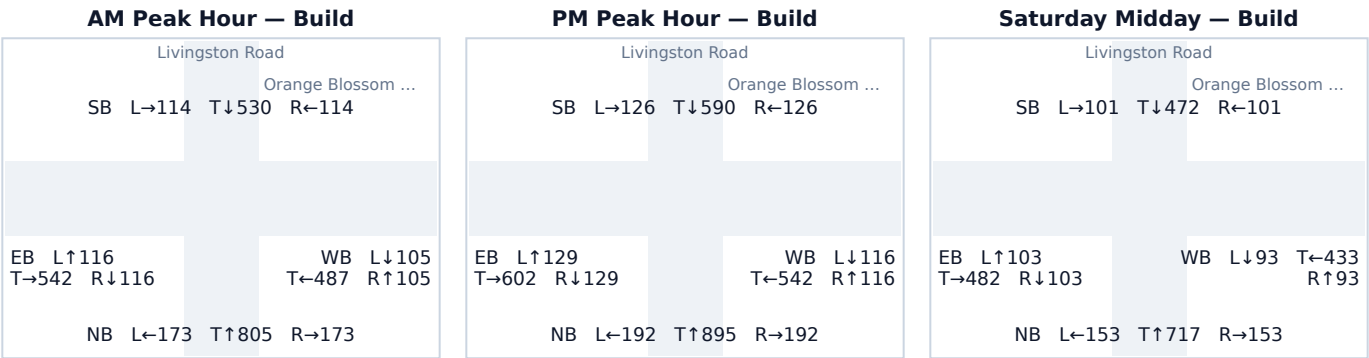

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	1,279	0	1,279	1.58 → 1.58	290.9 → 290.9	F → F	1,308
SB	842	0	842	1.04 → 1.04	66.9 → 67.0	E → E	862
EB	860	< 1	860	1.06 → 1.06	73.9 → 73.9	E → E	880
WB	774	0	774	0.96 → 0.96	46.4 → 46.4	D → D	771

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.18 The Lane & Immokalee Road

Signal ID

Location

Added PM peak trips

Existing / No-Build (PM)

Build (PM)

Δ control delay

Mitigation

florida-statewide-17572

SE Florida (statewide) · 1.88 mi from site

33


LOS F · 300.0 s/veh · v/c 1.88

LOS F · 300.0 s/veh · v/c 1.89

+0.0 s/veh

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

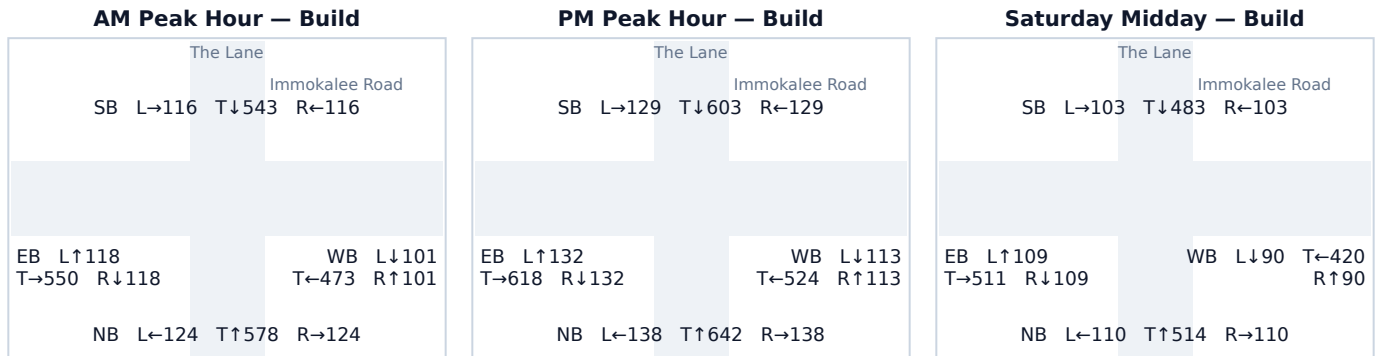

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	918	0	918	1.13 → 1.13	99.5 → 99.5	F → F	939
SB	861	0	861	1.06 → 1.06	74.1 → 74.1	E → E	880
EB	848	33	882	1.05 → 1.09	69.3 → 82.9	E → F	902
WB	750	0	750	0.93 → 0.93	41.4 → 41.4	D → D	730

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	33	100%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).


Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.19 Airport-Pulling Road & Tiburon Boulevard East

Signal ID	florida-statewide-17694
Location	SE Florida (statewide) · 2.01 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS F · 287.5 s/veh · v/c 1.57
Build (PM)	LOS F · 287.5 s/veh · v/c 1.57
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

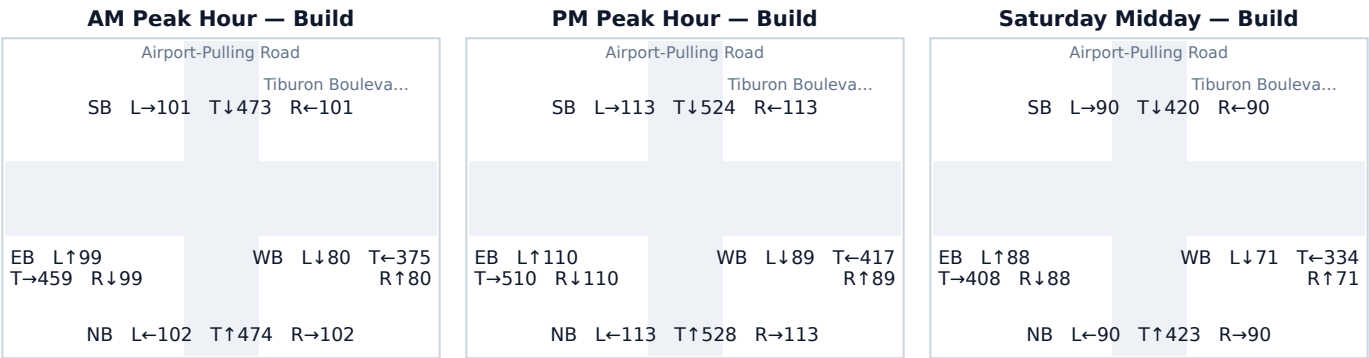

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	754	0	754	0.93 → 0.93	42.0 → 42.0	D → D	735
SB	750	0	750	0.93 → 0.93	41.3 → 41.3	D → D	729
EB	730	0	730	0.90 → 0.90	38.1 → 38.1	D → D	697
WB	595	< 1	595	0.73 → 0.73	26.2 → 26.2	C → C	504


NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.20 Airport-Pulling Road & Arielle Drive

Signal ID	florida-statewide-17662
Location	SE Florida (statewide) · 2.01 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS F · 287.5 s/veh · v/c 1.57
Build (PM)	LOS F · 287.5 s/veh · v/c 1.57
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

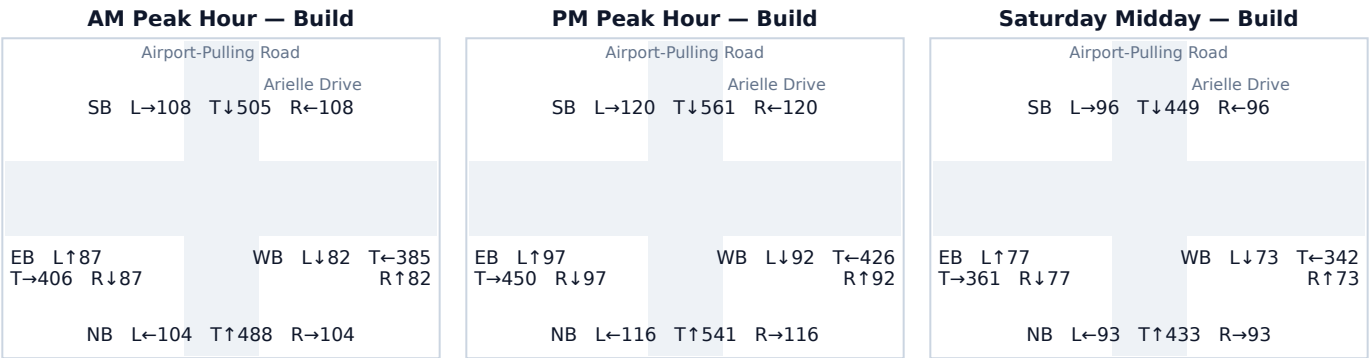

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	773	0	773	0.95 → 0.95	46.2 → 46.2	D → D	769
SB	801	0	801	0.99 → 0.99	53.5 → 53.5	D → D	818
EB	644	0	644	0.80 → 0.80	29.1 → 29.1	C → C	569
WB	610	0	610	0.75 → 0.75	27.0 → 27.0	C → C	523


NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.21 Immokalee Road & Preserve Lane

Signal ID	florida-statewide-17597
Location	SE Florida (statewide) · 2.09 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Δ control delay	+0.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

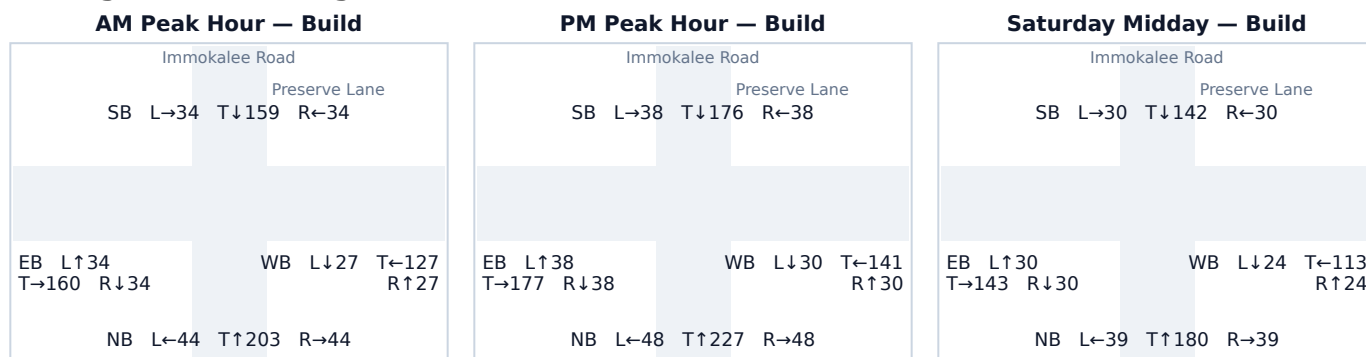

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	323	0	323	0.40 → 0.40	18.1 → 18.1	B → B	223
SB	252	0	252	0.31 → 0.31	16.8 → 16.8	B → B	166
EB	253	0	253	0.31 → 0.31	16.8 → 16.8	B → B	167
WB	201	0	201	0.25 → 0.25	16.1 → 16.1	B → B	129


NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.22 Airport-Pulling Road & Old Groves Road

Signal ID	florida-statewide-27810
Location	SE Florida (statewide) · 2.20 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS F · 260.1 s/veh · v/c 1.51
Build (PM)	LOS F · 260.1 s/veh · v/c 1.51
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

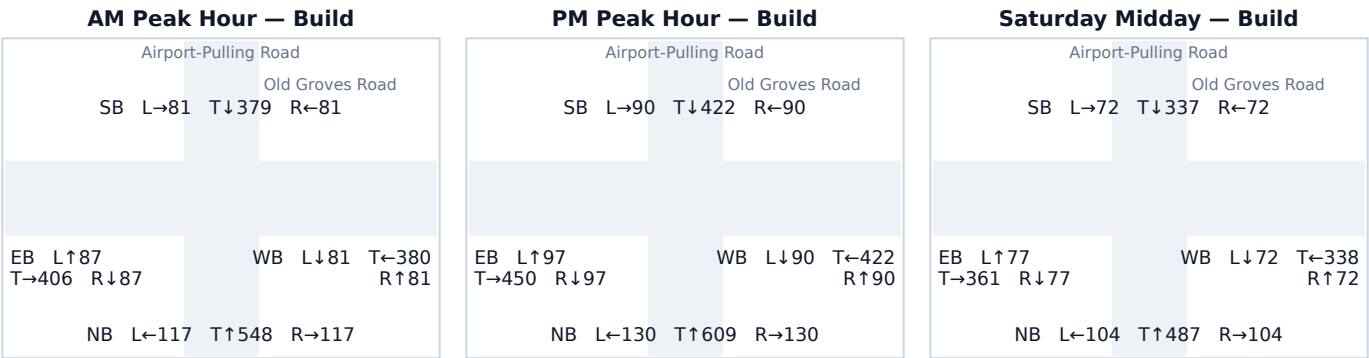

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	869	0	869	1.07 → 1.07	77.6 → 77.6	E → E	889
SB	602	0	602	0.74 → 0.74	26.5 → 26.5	C → C	512
EB	644	0	644	0.79 → 0.79	29.1 → 29.1	C → C	569
WB	602	0	602	0.74 → 0.74	26.6 → 26.6	C → C	513


NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.23 Immokalee Road & Dancing Wind Lane

Signal ID	florida-statewide-17567
Location	SE Florida (statewide) · 2.33 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Build (PM)	LOS C · 21.3 s/veh · v/c 0.57
Δ control delay	+0.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

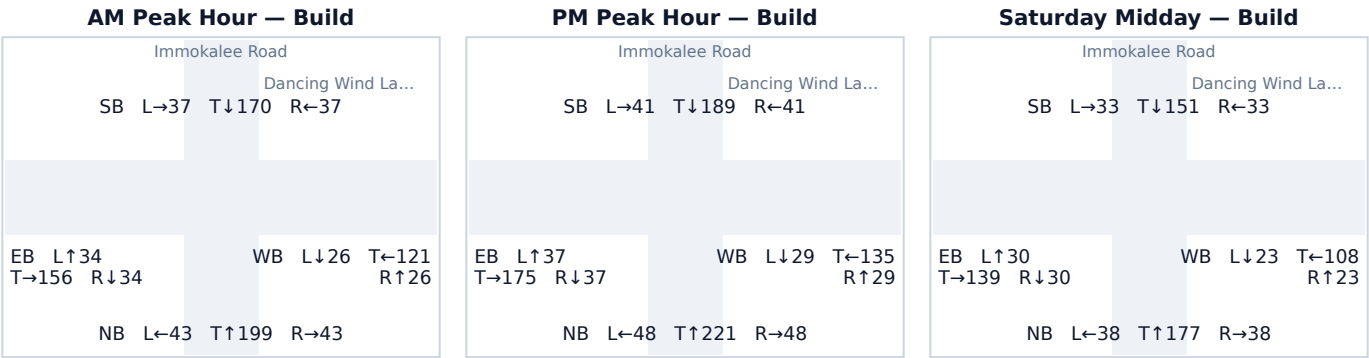

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)


Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	317	0	317	0.39 → 0.39	17.9 → 17.9	B → B	218
SB	271	0	271	0.33 → 0.33	17.1 → 17.1	B → B	181
EB	249	0	249	0.31 → 0.31	16.8 → 16.8	B → B	164
WB	193	0	193	0.24 → 0.24	15.9 → 15.9	B → B	122

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.24 Airport-Pulling Road & Immokalee Road

Signal ID	florida-statewide-19114
Location	SE Florida (statewide) · 2.38 mi from site
Added PM peak trips	33
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.85
Build (PM)	LOS F · 300.0 s/veh · v/c 1.86
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

Turning-Movement Diagrams (Build condition)

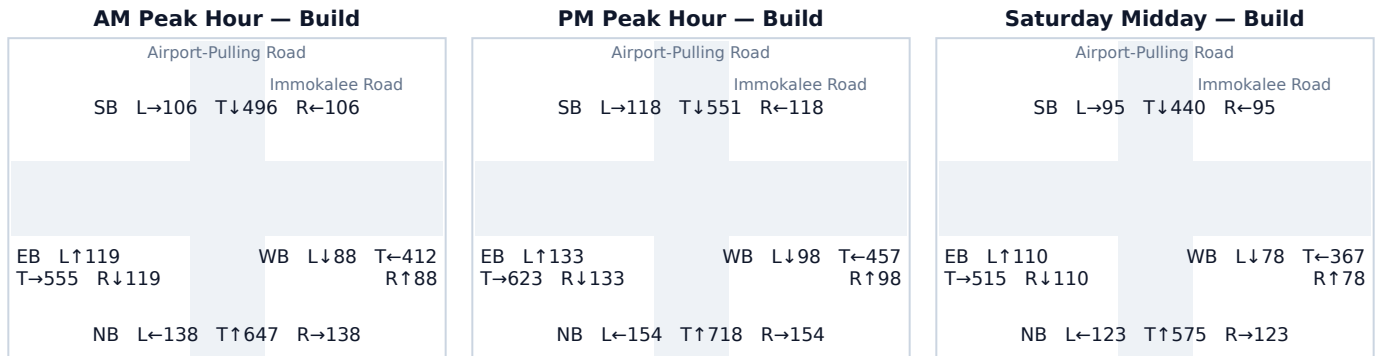

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	1,026	0	1,026	1.27 → 1.27	154.3 → 154.3	F → F	1,049
SB	787	0	787	0.97 → 0.97	49.6 → 49.6	D → D	793
EB	856	33	889	1.06 → 1.10	72.4 → 86.4	E → F	910
WB	653	0	653	0.81 → 0.81	29.8 → 29.8	C → C	582

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	33	100%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).


Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.25 Osceola Trail & Livingston Road

Signal ID	florida-statewide-17917
Location	SE Florida (statewide) · 2.46 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.73
Build (PM)	LOS F · 300.0 s/veh · v/c 1.73
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

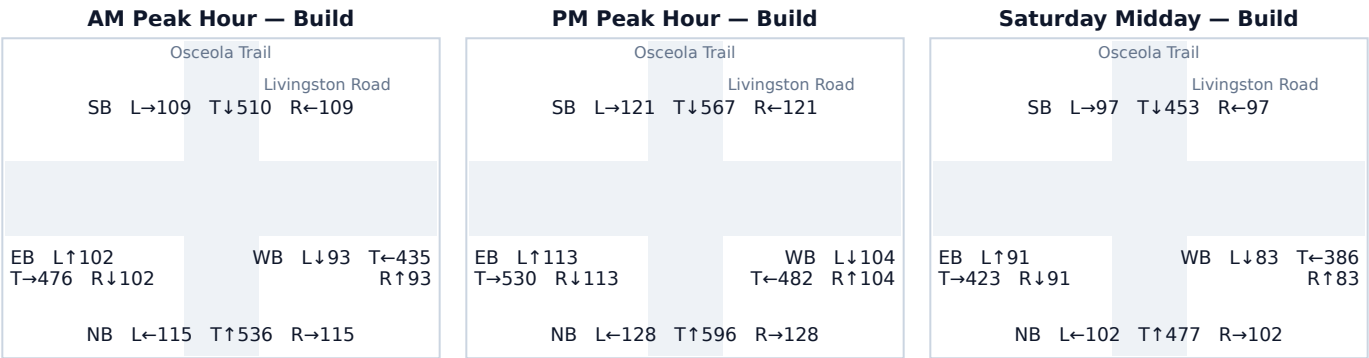

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	852	0	852	1.05 → 1.05	70.5 → 70.5	E → E	871
SB	809	0	809	1.00 → 1.00	55.9 → 55.9	E → E	828
EB	756	0	756	0.93 → 0.93	42.5 → 42.5	D → D	739
WB	690	0	690	0.85 → 0.85	33.0 → 33.0	C → C	634


NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

A.26 Airport-Pulling Road & Orange Blossom Drive

Signal ID	florida-statewide-17655
Location	SE Florida (statewide) · 2.46 mi from site
Added PM peak trips	< 1 (negligible)
Existing / No-Build (PM)	LOS C · 22.8 s/veh · v/c 0.63
Build (PM)	LOS C · 22.8 s/veh · v/c 0.63
Δ control delay	+0.0 s/veh
Mitigation	No mitigation required — projected delay change is below the City's 5-second TIS threshold.

The development distributes fewer than one net PM peak car trip to this junction, so the Existing (No-Build) and Build conditions are numerically identical at reporting precision. The junction is reproduced here for completeness; the scheme's net car-mode trip generation is below the level at which junction capacity governs.

Turning-Movement Diagrams (Build condition)

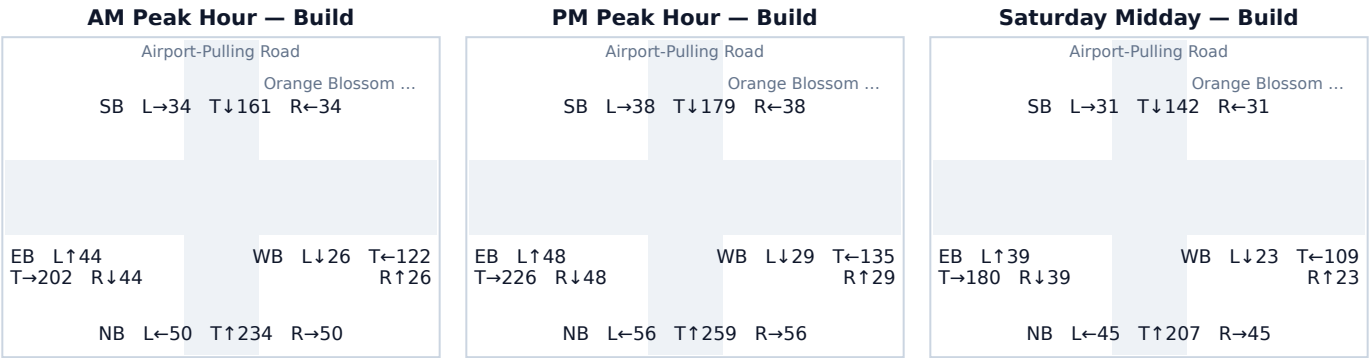

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	371	0	371	0.46 → 0.46	19.0 → 19.0	B → B	265
SB	255	0	255	0.31 → 0.31	16.9 → 16.9	B → B	168
EB	322	0	322	0.40 → 0.40	18.0 → 18.0	B → B	222
WB	193	0	193	0.24 → 0.24	15.9 → 15.9	B → B	123

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.