

Hillsborough County Sample



Traffic Impact Study

Prepared September 24, 2026 · 27.9378, -82.2859

Simple Impact Studies — sample draft

Traffic Impact Study

Generated 2026-09-24T12:37:31.682Z

1.0 EXECUTIVE SUMMARY

This Traffic Impact Study has been prepared to evaluate the potential traffic impact, identify short-term roadway and circulation needs, determine potential mitigation strategies, and identify critical traffic issues that should be addressed during the planning process of the proposed Hillsborough County Sample, located at Custom site (27.9378, -82.2859), Tampa MSA, within Hillsborough County (Tampa), Florida. The host controlling jurisdiction is Hillsborough County (Tampa) (FDOT District 7 (Tampa)); the applicable review framework is Mobility fee (replaced roadway impact fee in 2016). Analysis follows the FDOT Multimodal Transportation Site Impact Handbook (MTSIH, March 25, 2024) and the FDOT Quality/Level of Service Handbook v6.0 (August 2025); capacity analysis computes signalized control delay by the openly-published Webster (1958) uniform-delay formulation with an Akcelik overflow term — the basis of the capacity procedures FDOT Traffic Analysis Handbook §4.1 requires, which a submittal-grade study re-runs in licensed capacity software. The study covers 7 intersections within a 0.50-mile study area for land use 820 (Shopping Center / Retail) at a development size of 85 1,000 sqft GLA.

As part of this Traffic Impact Study, the following assignments were prepared consistent with the FDOT-approved methodology:

- Existing geometric conditions and assessment of the study impact area.
- Traffic data collection — daily volume counts and turning-movement counts at the critical study intersections and site driveways.
- Evaluation of existing traffic operations — Level of Service (LOS) and concurrency analysis.
- Traffic growth analysis, including committed-development assessment.
- Simulation of existing (current-year) and future conditions (opening year 2027) across three scenarios.
- Queue, turn-lane, and preliminary signal-warrant evaluation of the impacted network.

Findings:

- 0 intersections are projected to drop one or more LOS grades under Build conditions.
- 5 intersections operate at LOS E or F under Build conditions; mitigation per MTSIH 2024 §5 should be evaluated.

7	0	5	45.0s
INTERSECTIONS	LOS DROPS	AT LOS E/F	WORST Δ DELAY

2.0 ANALYSIS METHODOLOGY

Per MTSIH 2024 §4.3, methodology and scope are established through a pre-application methodology meeting with the controlling FDOT District, county, and applicable MPO/TPO. Per MTSIH 2024 §4.3, the pre-application methodology meeting establishes scope. The methodology letter or meeting minutes must be included as Appendix A of the formal submittal.

2.1 Controlling Guidance

Primary references: FDOT Multimodal Transportation Site Impact Handbook (MTSIH), March 25, 2024; FDOT Multimodal Transportation Site Impact Applications Guide, June 5, 2024; FDOT Quality/Level of Service Handbook v6.0, August 2025; FDOT Policy 000-525-006 (Level of Service Targets for the State Highway System); FDOT Procedure 525-030-120 (project traffic forecasting); FDOT Traffic Analysis Handbook (TAH), October 2025.

2.2 Analysis Software

Per FDOT TAH §4.1, approved analysis tools are HCS, Synchro / SimTraffic, SIDRA INTERSECTION (roundabouts), CORSIM, and Vissim. This screening analysis applies the openly-published Webster/Akcelik signalized-intersection model, reported in a format consistent with HCS output conventions. Vistro is not included in the FDOT TAH tool inventory; formal submittal output should be prepared in

HCS or Synchro.

2.3 Traffic Data Collection

Per MTSIH 2024, roadway-segment counts should be 72 consecutive hours (Monday afternoon through Friday morning) in urbanized, transitioning, and urban area classes, and 7 days in rural areas, in 15-minute increments on typical weekdays excluding holiday weeks. The default analysis peak per MTSIH 2024 §2.3.1 is the Weekday PM Peak Hour of Adjacent Street Traffic (one hour between 4–6 PM); MTSIH 2024 imposes no blanket Saturday-peak requirement for retail or restaurant land uses — midday, Saturday, or other special peaks are added only where site characteristics warrant (the Applications Guide fast-food case study analyzes AM + PM + midday). For turning-movement counts, MTSIH 2024 Appendix A (p. A-3) requires AM and PM TMCs covering trucks, pedestrians, and bicycles but does not prescribe duration or bin size; both are agreed at the pre-application methodology meeting. The Applications Guide Case Study 2 (§3.4.3) uses 8-hour TMCs (3 hr AM + 2 hr midday + 3 hr PM) as a worked example, while 2-hr AM and 2-hr PM in 15-minute bins is common Florida practice.

2.4 Analysis Scenarios and Time Horizons

Per MTSIH 2024 §4.3, minimum analysis years are: Existing, Future Background (No-Build), Future Build, and Future Build with Mitigation. This study is organized around three scenarios consistent with FDOT District practice: Scenario 1 — Existing Conditions (current-year); Scenario 2 — Future Conditions No-Build (opening year 2027); and Scenario 3 — Future Conditions Build (opening year 2027). Opening year is canonical; there is no fixed +5 horizon for concurrency or connection-permit work. Each year is explicitly labeled. For a Comprehensive Plan Amendment (CPA) review, the analysis must additionally include short-term (5-year) and long-term (10-year minimum) horizons. Hillsborough County (Tampa) convention: Per Land Development Code; mobility fee applies at permit (no horizon-year LOS test).

2.5 Trip Generation

Trip generation follows the public-data screening rates (NHTS 2017 / SANDAG 2002 / NCHRP 716) for land use 820 (Shopping Center / Retail) at the proposed development size of 85 1,000 sqft GLA. Net new external trips are calculated by applying pass-by and internal capture credits to gross trip generation per standard pass-by / internal-capture screening methodology. Per MTSIH 2024 §4.6.4, the fitted-curve equation is preferred when ≥20 data points are available, or when $R^2 \geq 0.75$ with the fitted curve falling within the data cluster and weighted standard deviation > 55% of the weighted average rate; otherwise the weighted average rate applies. Per MTSIH 2024 §4.6.6.6, pass-by trips at a site driveway cannot exceed 10% of the adjacent peak-hour two-way street traffic — this reasonableness check applies per roadway when the site fronts multiple streets and should be verified against the adjacent-street counts at submittal time.

Hillsborough County (Tampa) fee methodology: The Hillsborough mobility fee schedule blends ITE 10th Edition (2017) rates with the Florida Trip Characteristics Studies Database — a PROPRIETARY Tindale Oliver / Stantec corpus, NOT an FDOT public asset (no public URL, no API). Vehicle occupancy 1.40 persons/vehicle per Tampa Bay Regional Planning Model. ITE is on 11th Ed. for FDOT-wide MTIA work; the Hillsborough fee schedule has not yet migrated.

Daily rate applied	80.00 trips per ksf × 85 ksf
AM peak rate applied	3.20 trips per ksf × 85 ksf
PM peak rate applied	8.00 trips per ksf × 85 ksf
Rate source	SANDAG 2002 “(Not So) Brief Guide of Vehicular Traffic Generation Rates for the San Diego Region” — Community Shopping Center (daily 80/ksf; PM pass-by 30%)
Pass-by capture applied	30%
Internal capture applied	0% (MTSIH 2024 §4.6.9 sets no statewide numeric cap; rate negotiated at the methodology meeting per NCHRP 684 / standard screening methodology)
Background growth applied	1.5% per year over 1 year(s)
Hillsborough County (Tampa) TIA threshold	Per Land Development Code; mobility fee assessed at building permit
Weather condition	clear

Table: Site Trip Generation Summary

Period	Entering trips	Exiting trips
Daily	3,400	3,400
AM peak hour	166	106
PM peak hour	326	354

Table: Trip Generation by Period (raw → pass-by / internal capture → net external)

Period	Raw	Pass-by	Int. cap.	External	In	Out
AM Peak Hour	272	20	0	215	131	84
PM Peak Hour	680	204	0	406	195	211
Saturday Middyay	748	56	0	590	295	295
Daily Total	6,800	510	0	5,365	2,682	2,683

The external / net-external column is net-new vehicle trips assigned to the roadway = (gross – pass-by – internal-capture) × auto-mode share (85.3% for this metro). Walk / bike / transit person-trips are excluded from off-site assignment, so In + Out equals the external column.

2.6 Growth Rate

Per FDOT TAH §2.7, demand projections should use the adopted regional MPO/TPO travel-demand model (TDM); where TDM use is not warranted, historical AADT trend growth from Florida Traffic Online (FTO) is the FDOT-wide convention. Background traffic is grown at 1.50% per year, applied as an explicit override, not derived from measured data. Explicit override — 1.50%/yr was supplied with the request and applied in place of the engine's own rate. The measured rate for this region is 2.92%/yr (FDOT TDA Annual_Average_Daily_Traffic_Historical FeatureServer layer 0 (per-year polyline snapshots; segment match by COSITE composite site ID) — median per-segment CAGR across 2129 matched count stations within the Tampa MSA bounding box (2021 → 2025)). The applied rate is not derived from measured data; its basis must be stated by the preparer. The override is not an FTO or FDOT TDA trend; for formal submittal, the FDOT District / FTO segment-level trend on the affected facilities is the authoritative input and should be confirmed at the methodology meeting.

2.7 Level of Service Standards

Per FDOT Policy 000-525-006, the peak-hour automobile-mode LOS standard on the State Highway System is LOS D in urbanized areas and LOS C in rural and transitioning areas. Constrained or backlogged facilities maintain their facility-specific designation. Roadway segment LOS reporting uses the FDOT Q/LOS Handbook v6.0 Generalized Service Volume Tables (GSVTs). Intersection LOS uses the conventional US signalized control-delay bands: A ≤10s, B ≤20s, C ≤35s, D ≤55s, E ≤80s, F >80s of average control delay per vehicle.

2.8 Context Classification

Per FDOT Q/LOS v6.0 (which replaced "complete streets" terminology with "context-based solutions") and FDM Chapter 200 §200.4 (Table 200.4.1), the study network's context classification (C1 Natural, C2 Rural, C2T Rural Town, C3R Suburban Residential, C3C Suburban Commercial, C4 Urban General, C5 Urban Center, C6 Urban Core) calibrates mode treatments and design standards; cross-section and lane widths follow FDM Table 210.2.1. The controlling context class should be confirmed against the FDOT Preliminary Context Classification mapping during the methodology meeting.

3.0 INTRODUCTION

The proposed Hillsborough County Sample is located at Custom site (27.9378, -82.2859), Tampa MSA within Hillsborough County (Tampa), in the Tampa MSA area. The project consists of 85 1,000 sqft GLA under land use 820 (Shopping Center / Retail), and is anticipated to be completed by the opening year 2027.

Project name

Hillsborough County Sample

Land use

LU 820 — Shopping Center / Retail

Development size	85 1,000 sqft GLA
Site coordinates	27.9378°, -82.2859°
Region	Tampa MSA
Host jurisdiction	Hillsborough County (Tampa)
FDOT District	FDOT District 7 (Tampa)
Review framework	Mobility fee (replaced roadway impact fee in 2016)
Controlling document(s)	Hillsborough County Mobility Fee Ordinance + Mobility Fee Schedule (last full study 2020; update study begun early 2025) — methodology uses ITE 10th Ed. (2017) blended with the Florida Trip Characteristics Studies Database (Tindale Oliver / Stantec proprietary corpus; not an FDOT public asset).
Regional MPO / TPO	Plan Hillsborough (Hillsborough TPO)
Opening year	2027

Surrounding land use, site plan figures, and detailed land-use description are dependent on the final site plan and are not produced by this screening tool. Final submittal should incorporate site plan figures (surrounding intersections and studied area) and a written project description per MTSIH 2024.

3.1 Study Area

The study area comprises the 7 intersections listed below, selected for their proximity to the site and their share of project-generated traffic. Existing lane geometry and traffic control at each location are shown in the Scenario 1 figures (see the turning-movement appendix).

#	Study intersection	Distance (mi)
1	West Brandon Boulevard & North Parsons Avenue	0.01
2	South Parsons Avenue & Oakfield Drive	0.25
3	East Brandon Boulevard & Lithia Pinecrest Road	0.26
4	Oakfield Drive & South Moon Avenue	0.30
5	North Parsons Avenue & Victoria Street	0.44
6	South Kings Avenue & West Brandon Boulevard	0.49
7	East Brandon Boulevard & Bryan Road	0.50

4.0 SCENARIO 1 — EXISTING CONDITIONS

Scenario 1 establishes existing (current-year) conditions from the collected daily and turning-movement counts at the study intersections. Existing Level of Service and control delay are summarized below; existing lane geometry and traffic control are shown in the Scenario 1 turning-movement figures (appendix).

Study intersection	Distance (mi)	Existing LOS	Existing delay (s)
West Brandon Boulevard & North Parsons Avenue	0.01	F	83.7
South Parsons Avenue & Oakfield Drive	0.25	A	6.4
East Brandon Boulevard & Lithia Pinecrest Road	0.26	F	300.0
Oakfield Drive & South Moon Avenue	0.30	B	14.1

Study intersection	Distance (mi)	Existing LOS	Existing delay (s)
North Parsons Avenue & Victoria Street	0.44	E	55.0
South Kings Avenue & West Brandon Boulevard	0.49	F	300.0
East Brandon Boulevard & Bryan Road	0.50	F	300.0

Existing AADT counts and functional classification are seeded from a live query of the FDOT Transportation Data and Analytics (TDA) ArcGIS REST services (gis.fdot.gov RCI_Layers FeatureServer 0/3/15 + Access_Management_TDA) within an 80-meter buffer of each intersection. Where the live extract returns a row, the in-table AADT, AADT year, and access-management class reflect the FDOT-published value at render time. Where no segment is matched (off-SHS local-road intersections, or radii beyond 80 m), values fall back to the engine estimate and must be confirmed against Florida Traffic Online (<https://tdaappsprod.dot.state.fl.us/fto/>). Existing turn-lane storage length must be field-supplied as `existingStorageFt` on each intersection record to enable the \$9.0 storage-bay-adequacy comparison; the renderer surfaces a deficit calculation only when that field is present.

4.1 FDOT TDA Site Snapshot (live)

RCI roadway ID	10110000
Begin/end mileposts	9.439 → 9.706
AADT	69,500 vpd (2025)
K factor (peak-hour)	9.000
D factor (directional)	57.900
Truck %	5.5%
Functional class	Urban Minor Arterial
On State Highway System?	No
Access management class	Not classified — interim Rule 14-97.004(1) standards apply
FDOT District	D-7

Live extract from gis.fdot.gov/arcgis/rest/services/RCI_Layers/FeatureServer at render time. Direct on-segment match (≤60 m buffer). Cross-check against Florida Traffic Online (<https://tdaappsprod.dot.state.fl.us/fto/>) for the most recent annual update before submittal.

4.2 Roadway Segments Configuration

Physical and operational characteristics of each study segment from a live FDOT Transportation Data and Analytics (TDA) Roadway Characteristics Inventory (RCI) query at render time. Through-lane count and median type are RCI flat-file attributes not returned by this point query and must be confirmed from the RCI or a field inventory at submittal.

Study segment	RCI roadway	Functional class	SHS	Access cls	K	D
West Brandon Boulevard & North Parsons Avenue	10110000	Urban Minor Arterial	No	—	9.000	57.900
South Parsons Avenue & Oakfield Drive	10000365	Urban Collector	—	—	9.000	57.900
East Brandon Boulevard & Lithia Pinecrest Road	10110000	Urban Minor Arterial	No	—	9.000	57.900
Oakfield Drive & South Moon Avenue	10000365	Urban Collector	—	—	9.000	57.900
North Parsons Avenue & Victoria Street	10506000	Urban Minor Arterial	—	—	9.000	57.900

Study segment	RCI roadway	Functional class	SHS	Access cls	K	D
South Kings Avenue & West Brandon Boulevard	10110000	Urban Principal Arterial - Other	No	—	9.000	57.900
East Brandon Boulevard & Bryan Road	10110000	Urban Principal Arterial - Other	No	—	9.000	57.900

Live extract from gis.fdot.gov RCI_Layers FeatureServer. Access-management class per Rule 14-97 F.A.C.; functional classification per RCI Feature 121. Confirm lane count, median type, and posted speed from the RCI flat file or a field inventory before submittal.

5.0 SCENARIO 2 — FUTURE CONDITIONS NO BUILD (2027)

Scenario 2 represents future background (No-Build) conditions at the opening year 2027: existing volumes grown to the opening year without the proposed project. Background traffic is grown at 1.5% per year over 1 year, and any committed developments in the study area should be added to the No-Build network. The methodology and derivation of the applied growth rate are described in §2.6; the resulting No-Build Level of Service at each study intersection is reported in §7.0 alongside the Existing and Build scenarios.

Where the reviewing agency requires a travel-demand-model forecast (e.g., SERPM for Southeast Florida, or the controlling MPO/TPO model), the No-Build volumes should be reconciled against the adopted model run; the model version, base year, and horizon year are identified in the methodology letter. This screening analysis applies historical-AADT trend growth per FDOT TAH §2.7 in lieu of a model run.

Growth source: Explicit override — 1.50%/yr was supplied with the request and applied in place of the engine's own rate. The measured rate for this region is 2.92%/yr (FDOT TDA Annual_Average_Daily_Traffic_Historical FeatureServer layer 0 (per-year polyline snapshots; segment match by COSITE composite site ID) — median per-segment CAGR across 2129 matched count stations within the Tampa MSA bounding box (2021 → 2025)). The applied rate is not derived from measured data; its basis must be stated by the preparer..

5.1 AADT Growth Projection

Current-year segment AADT (live FDOT RCI, §4.2) is projected to the No-Build horizons at the applied 1.50%/yr compound growth rate derived from the FDOT historical-AADT trend (§2.6). These are screening-level trend projections; the adopted MPO/TPO travel-demand model volumes govern at formal submittal.

Study segment	Current AADT (yr)	CAGR	No-Build AADT (2027)	Design AADT (2047)
West Brandon Boulevard & North Parsons Avenue	69,500 (2025)	1.50%	71,601	96,436
South Parsons Avenue & Oakfield Drive	14,200 (2025)	1.50%	14,629	19,703
East Brandon Boulevard & Lithia Pinecrest Road	69,500 (2025)	1.50%	71,601	96,436
Oakfield Drive & South Moon Avenue	14,200 (2025)	1.50%	14,629	19,703
North Parsons Avenue & Victoria Street	21,400 (2025)	1.50%	22,047	29,694
South Kings Avenue & West Brandon Boulevard	67,000 (2025)	1.50%	69,025	92,967
East Brandon Boulevard & Bryan Road	62,500 (2025)	1.50%	64,389	86,723

Projection = current AADT × (1 + CAGR)^(horizon – count year). Where the live RCI count year is unavailable, the applied growth-years span is used. For submittal, use the per-segment FDOT historical AADT series (Florida Traffic Online) and, where required, the adopted MPO/TPO model volumes.

6.0 SCENARIO 3 — FUTURE CONDITIONS BUILD (2027)

Scenario 3 represents future Build conditions at the opening year 2027: the Scenario 2 No-Build network plus the proposed development's net new external trips at the assigned distribution. Per FDOT TAH §2.7, trip distribution and assignment should use the adopted regional MPO/TPO travel-demand model (Plan Hillsborough (Hillsborough TPO)), with model version, base year, and horizon year identified in the methodology letter. This screening analysis distributes net new external trips to study-area zones with the Caltran gravity model (mass ÷ distance; see §6.1) and assigns them to signalized intersections within the study area; for formal submittal, distribution percentages and the TDM run identifier should be agreed upon during the methodology meeting.

6.1 Trip Distribution — Gravity Model

Project trips are distributed to the surrounding study-area zones with the gravity model used in the Caltran Engineering HCA Westside reference TIS, adopted here as the Florida distribution standard. Each zone attracts trips in proportion to its mass and inversely with its distance from the site — term = $M / (d^{1.1} \cdot d_{\text{site}})$ — normalized so the zone shares sum to 100%. Zone mass M is the intersection through-volume (AADT × K-factor) as the destination-activity attraction proxy; d_{site} (the site zone's own distance normalizer) is 1. The resulting shares set the directional distribution below and drive the project-trip assignment in §6.2.

Directional sector	Share of project trips
Northeast (NNE + ENE)	6%
Southeast (ESE + SSE)	75%
Southwest (SSW + WSW)	19%
Northwest (WNW + NNW)	0%

Study-area zone	Dir.	Distance (mi)	Mass (M)	Gravity term	Trip share
East Brandon Boulevard & Lithia Pinecrest Road	ESE	0.26	6,255	23957.4	31.33%
West Brandon Boulevard & North Parsons Avenue	ESE	0.01	1,926	19260.0	25.19%
South Kings Avenue & West Brandon Boulevard	WSW	0.49	6,030	12406.2	16.22%
East Brandon Boulevard & Bryan Road	ESE	0.50	5,625	11304.1	14.78%
North Parsons Avenue & Victoria Street	NNE	0.44	1,926	4375.8	5.72%
South Parsons Avenue & Oakfield Drive	SSE	0.25	700	2836.6	3.71%
Oakfield Drive & South Moon Avenue	SSW	0.30	700	2332.9	3.05%

Screening-grade gravity distribution over 7 study-area zones. For formal submittal the adopted regional MPO/TPO travel-demand-model distribution and the run identifier are confirmed at the methodology meeting per FDOT TAH §2.7; this gravity worksheet documents the screening basis.


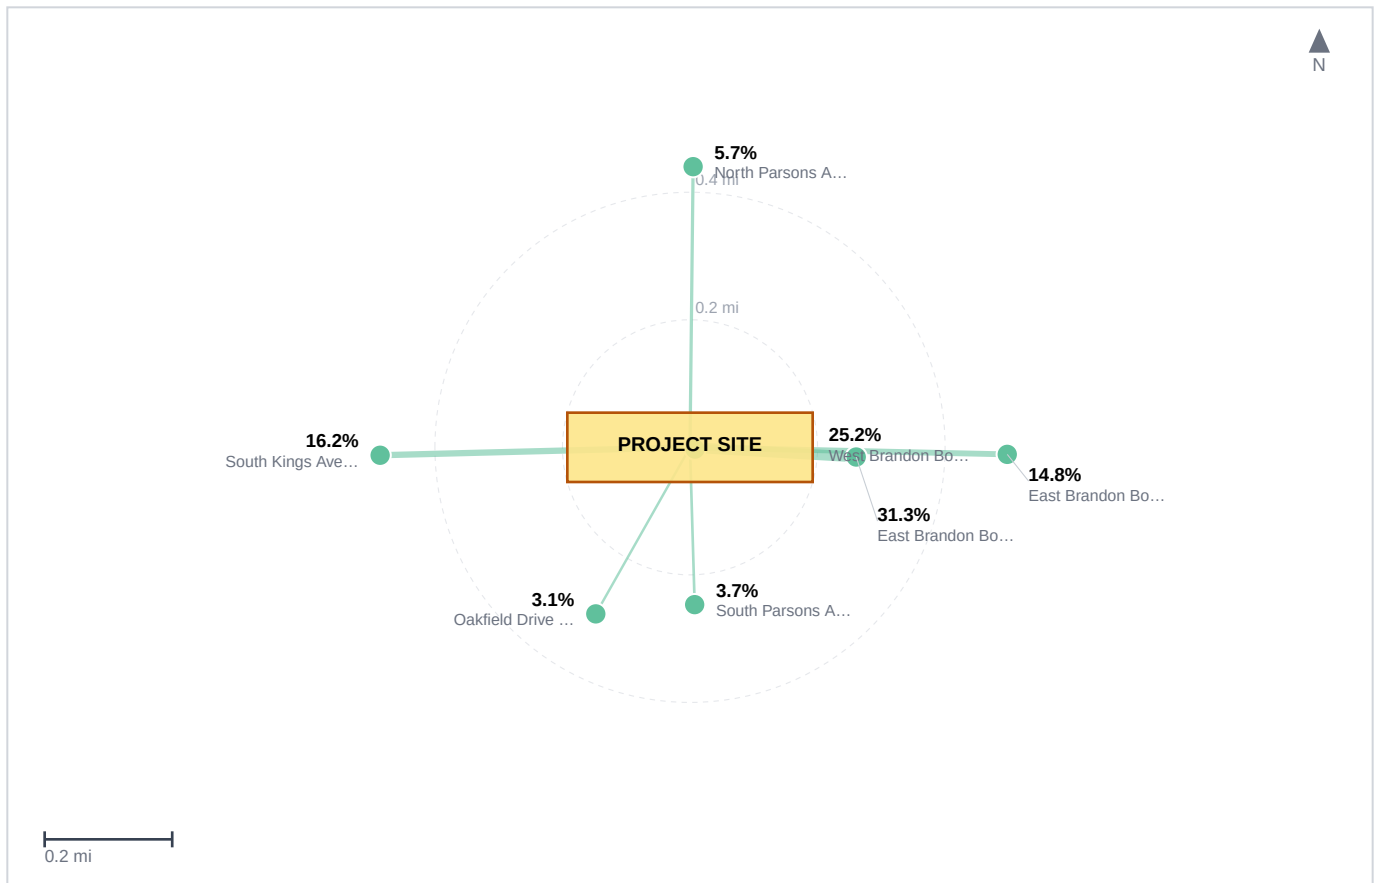


Figure — Project Trip Distribution. Study-area zones plotted to scale at their true bearing and distance from the site; leg weight is proportional to each zone's share of project trips, and the label gives that share. Derived from the Gravity Model distribution — the same shares tabulated above. Screening-grade: zone positions are the analysis locations, not a surveyed base map.

Figure — Directional Distribution of Project Trips

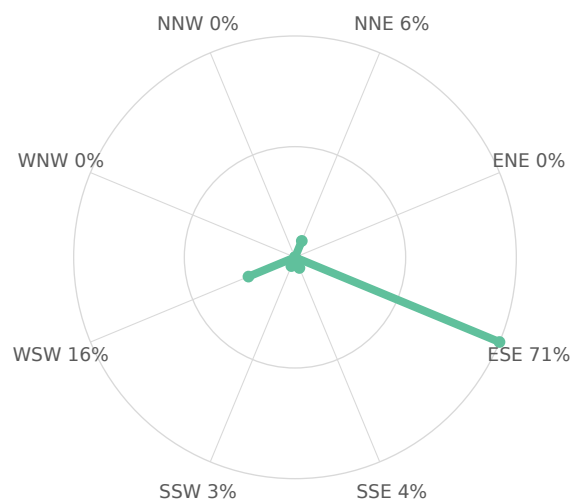

Screening-grade directional distribution of net new project trips by compass octant (spoke length $\propto$ percent of project trips). Derived from the Gravity Model distribution.

Figure — Project Trip Share by Study-Area Zone


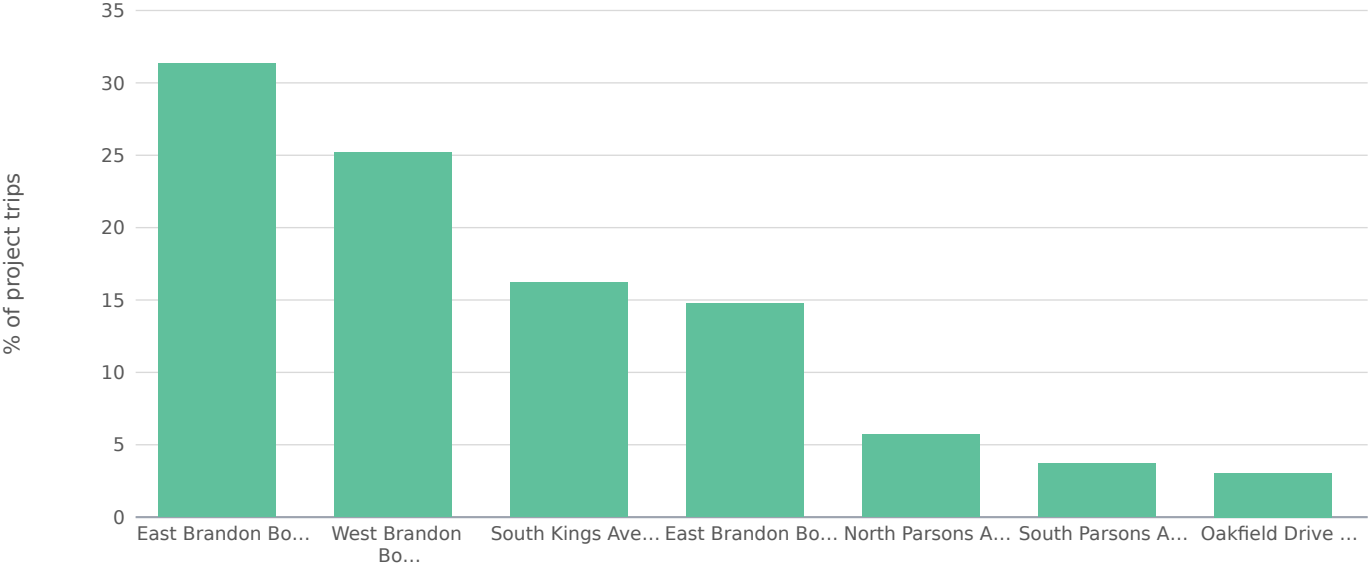


Figure — Trip Share vs. Distance from Site (Gravity Decay)

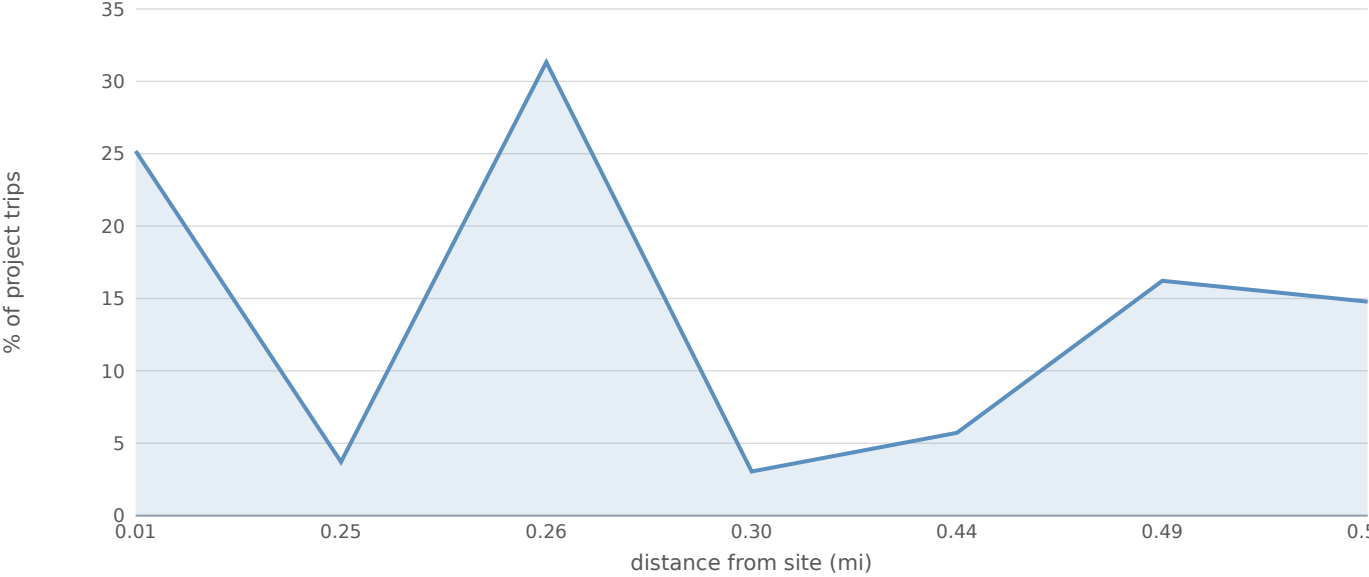

6.2 Project Trip Assignment

Study intersection	Dir.	Distance (mi)	AM trips	PM trips	Share of project
West Brandon Boulevard & North Parsons Avenue	ESE	0.01	134	204	38.6%
South Parsons Avenue & Oakfield Drive	SSE	0.25	7	13	2.5%
East Brandon Boulevard & Lithia Pinecrest Road	ESE	0.26	93	202	38.3%
Oakfield Drive & South Moon Avenue	SSW	0.30	4	8	1.5%
North Parsons Avenue & Victoria Street	NNE	0.44	12	23	4.4%

Study intersection	Dir.	Distance (mi)	AM trips	PM trips	Share of project
South Kings Avenue & West Brandon Boulevard	WSW	0.49	18	27	5.1%
East Brandon Boulevard & Bryan Road	ESE	0.50	20	51	9.7%

AM- and PM-peak project trips assigned to each study intersection from the §6.1 gravity distribution: the directional shares orient the loading toward the high-share sectors, while distance-decay from the site sets the magnitude that passes through each intersection. Entering/exiting splits at each intersection follow the site's period directional split.

Trip Distribution by Time of Day

Estimated within-day distribution of the 6,800 gross daily trips and the resulting on-site accumulation. Within-day distribution from NHTS 2022 shopping / errand / meal trip start times, cross-checked against public-data time-of-day patterns for LU 820 / 850. Activity builds to a midday plateau and a stronger late-afternoon/evening peak; on-site occupancy peaks midday through the evening.

Figure — Inbound / Outbound Trips by Start Time


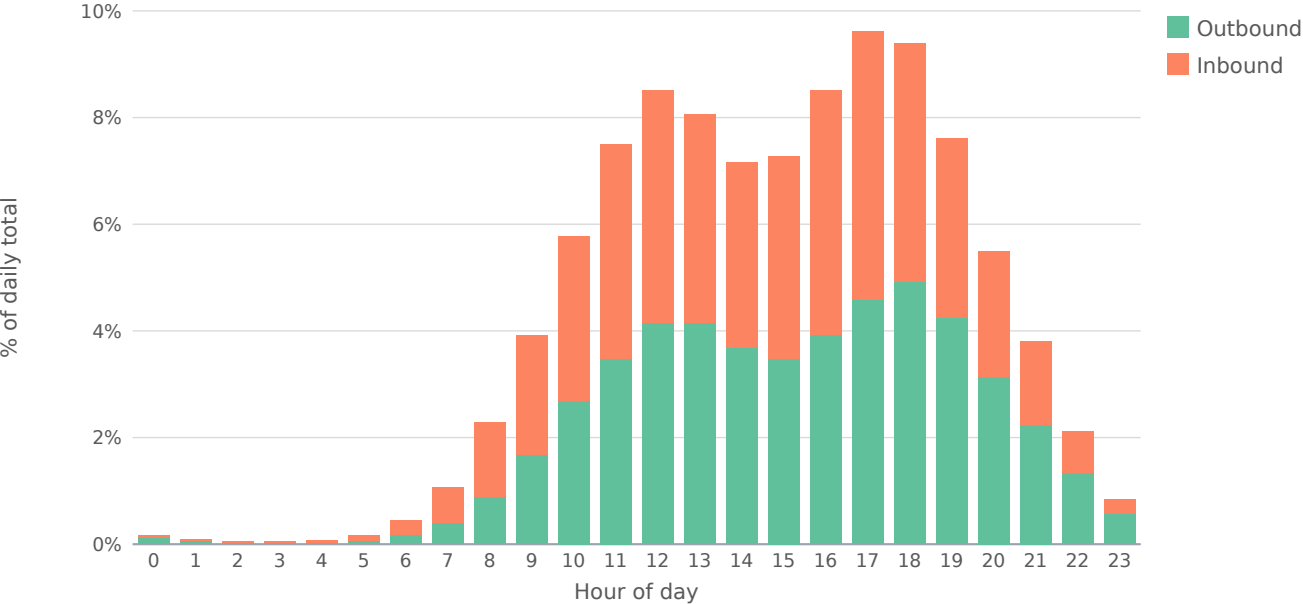


Figure — Daily Trip Accumulation

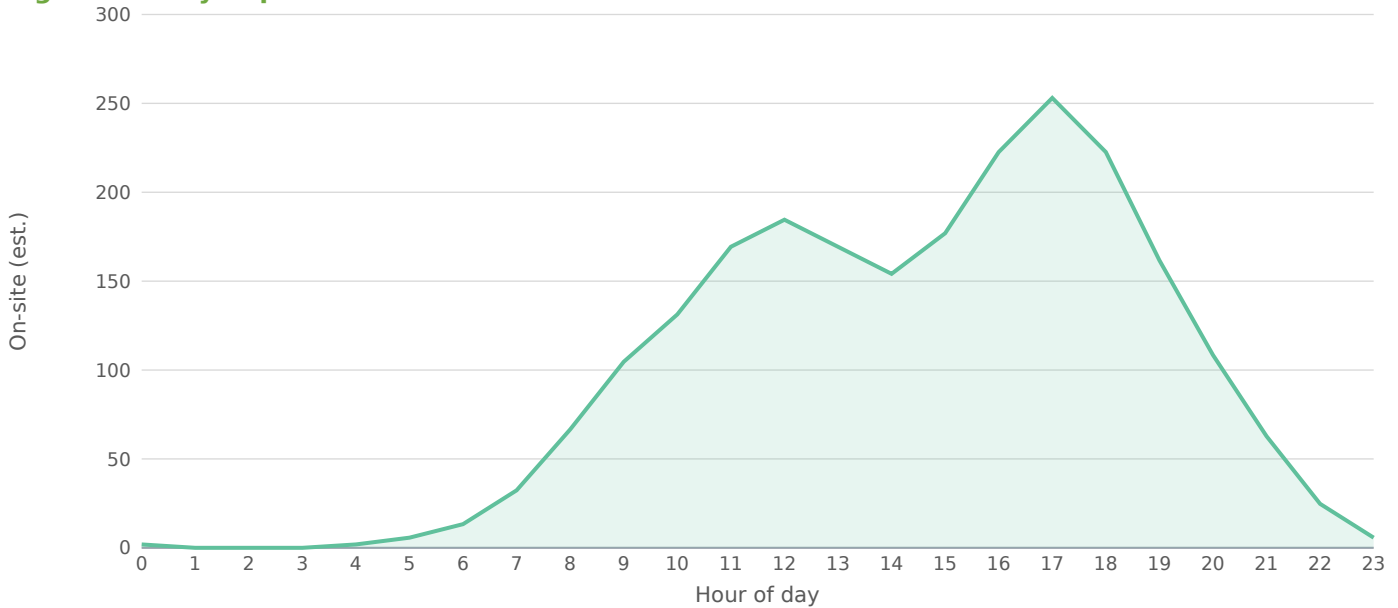

Peak on-site accumulation ~253 at 17:00, from 6,800 gross daily trips on the retail within-day profile. Screening estimate; not a substitute for a calibrated time-of-day model.

7.0 LEVEL OF SERVICE ANALYSIS

Intersection Level of Service is reported across the analysis scenarios against the conventional US signalized control-delay bands republished in state DOT traffic-engineering manuals. Four horizons are evaluated: (1) Existing — Scenario 1 current-year volumes; (2) No-Build — Scenario 2 at opening year 2027; (3) Build — Scenario 3 at opening year 2027; and (4) 20-Year Long-Range (2047) No-Build and Build. A ▲ flag marks any intersection projected to drop a LOS grade under Build conditions.

Intersection	Existing	Opening NB	Opening Bld	Design NB	Design Bld	Δ delay (s)
West Brandon Boulevard & North Parsons Avenue	F / 84	F / 90	F / 135	F / 252	F / 300	45.0
South Parsons Avenue & Oakfield Drive	A / 6	A / 7	A / 7	A / 7	A / 7	0.0
East Brandon Boulevard & Lithia Pinecrest Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
Oakfield Drive & South Moon Avenue	B / 14	B / 14	B / 14	B / 17	B / 17	0.0
North Parsons Avenue & Victoria Street	E / 55	E / 59	E / 62	F / 200	F / 205	2.9
South Kings Avenue & West Brandon Boulevard	F / 300	F / 300	F / 300	F / 300	F / 300	0.0
East Brandon Boulevard & Bryan Road	F / 300	F / 300	F / 300	F / 300	F / 300	0.0

Each scenario cell shows LOS grade / average control delay (s/veh) against the conventional US control-delay bands (A ≤10, B ≤20, C ≤35, D ≤55, E ≤80, F >80 s). Screening delays use each intersection's resolved signal timing — 3 from a Webster optimum cycle with Critical Movement Method splits derived from the no-build volumes; 4 at or beyond saturation on the generic 90 s / g/C 0.45 default (basis printed per intersection in the worksheets; timing held fixed across scenarios; approach capacity = 1,800 pc/h/ln × that phase's g/C) — and are superseded by a calibrated HCS/Synchro analysis of the actual lane geometry and signal timing at submittal.

7.1 Improvement Alternatives

The following intersection improvement alternatives are recommended to address projected Build-

condition LOS impacts. Geometric mitigation should be designed to FDOT Design Manual (FDM 2026, Topic No. 625-000-002, dated January 1, 2026) standards — turn-lane warrants, deceleration / storage / taper lengths, intersection sight distance, and median-opening design per FDM Chapter 212; roundabouts per FDM Chapter 213. Proportionate-share, mobility-fee, or developer-contribution amounts for jurisdictions that retain concurrency (e.g., Miami-Dade Chapter 33-G) or operate mobility-fee programs (e.g., Hillsborough, Jacksonville/Duval Chapter 655, Miami-Dade Chapter 33E) should be calculated separately based on the controlling local-government ordinance.

West Brandon Boulevard & North Parsons Avenue [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +45.0s, design year +48.0s).

East Brandon Boulevard & Lithia Pinecrest Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

North Parsons Avenue & Victoria Street [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: design year (opening year +2.9s, design year +4.5s).

South Kings Avenue & West Brandon Boulevard [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

East Brandon Boulevard & Bryan Road [MAJOR]

Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

7.2 Alternative Intersection LOS (with improvement)

The improvement alternatives in §7.1 are sized to mitigate the project's incremental impact and restore each affected intersection to approximately its No-Build (without-project) Level of Service. The table below states the with-improvement objective per location; the achieved Level of Service must be confirmed by a detailed HCS / Synchro analysis of the specific improvement at submittal.

Intersection	Build LOS	Δ delay (s)	Improvement class	Target LOS (improved)
West Brandon Boulevard & North Parsons Avenue	F	45.0	Major (geometry + signal)	F (verify — may remain constrained)
East Brandon Boulevard & Lithia Pinecrest Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
North Parsons Avenue & Victoria Street	E	2.9	Major (geometry + signal)	E (verify — may remain constrained)
South Kings Avenue & West Brandon Boulevard	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)
East Brandon Boulevard & Bryan Road	F	0.0	Major (geometry + signal)	F (verify — may remain constrained)

Target LOS is the No-Build (without-project) grade the improvement is sized to restore, not a recomputed capacity result. Confirm the achieved delay / LOS with a detailed HCS / Synchro analysis of the specific geometry and signal timing at submittal.

8.0 QUEUE ANALYSIS (2027)

The 95th-percentile back-of-queue at each study intersection under Build conditions is summarized below. Queues are estimated from the standard cyclic-queue relation (Webster arrival/discharge form). The table below reports the governing approach; where imported Synchro records supplied measured turning-movement counts, §8.1 reports the queue for each left / through / right lane group

individually and compares it to that movement's own bay storage.

Intersection	Critical movement	Build Q95 (ft)
West Brandon Boulevard & North Parsons Avenue	Worst approach	1,146
South Parsons Avenue & Oakfield Drive	Worst approach	124
East Brandon Boulevard & Lithia Pinecrest Road	Worst approach	3,405
Oakfield Drive & South Moon Avenue	Worst approach	180
North Parsons Avenue & Victoria Street	Worst approach	1,311
South Kings Avenue & West Brandon Boulevard	Worst approach	3,141
East Brandon Boulevard & Bryan Road	Worst approach	2,973

8.1 Lane-Group Queues at Intersections with Measured Turning Movements

At the intersections below, an imported Synchro record supplied measured turning-movement counts, so the background traffic carries a real left / through / right split rather than an assumed one. Each lane group is analyzed on the same one-critical-lane screening basis as the approach (saturation flow $\times$ g/C), with the project's own trips assigned to specific movements by the path assignment; lane-group volumes cross-foot to their approach total. Where the imported record also carried a bay length, the queue is compared against that bay and a deficit is flagged. Where the record also carried LANE COUNTS, the Lanes column shows them and that group's capacity is sized as lanes $\times$ saturation flow $\times$ g/C; an em-dash in the Lanes column means no count was supplied and the group falls back to a single critical lane. Signal phasing is not carried by the import, so a calibrated Synchro / SimTraffic run supersedes these figures for design.

Intersection	Lane group	Lanes	Build vph	v/c	Q95 (ft)	Bay (ft)	Storage
West Brandon Boulevard & North Parsons Avenue	NB L	—	145	0.18	90	—	—
West Brandon Boulevard & North Parsons Avenue	NB T	—	412	0.51	303	—	—
West Brandon Boulevard & North Parsons Avenue	NB R	—	0	0.00	0	—	—
West Brandon Boulevard & North Parsons Avenue	SB L	—	0	0.00	0	—	—
West Brandon Boulevard & North Parsons Avenue	SB T	—	400	0.49	292	—	—
West Brandon Boulevard & North Parsons Avenue	SB R	—	118	0.15	72	—	—
West Brandon Boulevard & North Parsons Avenue	EB L	—	0	0.00	0	—	—
West Brandon Boulevard & North Parsons Avenue	EB T	—	0	0.00	0	—	—
West Brandon Boulevard & North Parsons Avenue	EB R	—	0	0.00	0	—	—
West Brandon Boulevard & North Parsons Avenue	WB L	—	108	0.13	65	—	—
West Brandon Boulevard & North Parsons Avenue	WB T	—	906	1.12	926	—	—
West Brandon Boulevard & North Parsons Avenue	WB R	—	108	0.13	65	—	—
South Parsons Avenue & Oakfield Drive	NB L	—	118	0.11	35	—	—
South Parsons Avenue & Oakfield Drive	NB T	—	238	0.22	75	—	—
South Parsons Avenue & Oakfield Drive	NB R	—	0	0.00	0	—	—
South Parsons Avenue & Oakfield Drive	SB L	—	5	0.00	1	—	—
South Parsons Avenue & Oakfield Drive	SB T	—	238	0.22	75	—	—
South Parsons Avenue & Oakfield Drive	SB R	—	119	0.11	35	—	—
South Parsons Avenue & Oakfield Drive	EB L	—	1	0.00	1	—	—
South Parsons Avenue & Oakfield Drive	EB T	—	0	0.00	0	—	—
South Parsons Avenue & Oakfield Drive	EB R	—	0	0.00	0	—	—
East Brandon Boulevard & Lithia Pinecrest Road	NB L	—	0	0.00	0	—	—

East Brandon Boulevard & Lithia Pinecrest Road	NB T	—	371	0.46	265	— —
East Brandon Boulevard & Lithia Pinecrest Road	NB R	—	185	0.23	117	— —
East Brandon Boulevard & Lithia Pinecrest Road	SB L	—	185	0.23	117	— —
East Brandon Boulevard & Lithia Pinecrest Road	SB T	—	323	0.40	223	— —
East Brandon Boulevard & Lithia Pinecrest Road	SB R	—	0	0.00	0	— —
East Brandon Boulevard & Lithia Pinecrest Road	EB L	—	185	0.23	117	— —
East Brandon Boulevard & Lithia Pinecrest Road	EB T	—	2,907	3.59	2,974	— —
East Brandon Boulevard & Lithia Pinecrest Road	EB R	—	236	0.29	154	— —
East Brandon Boulevard & Lithia Pinecrest Road	WB L	—	0	0.00	0	— —
East Brandon Boulevard & Lithia Pinecrest Road	WB T	—	0	0.00	0	— —
East Brandon Boulevard & Lithia Pinecrest Road	WB R	—	0	0.00	0	— —
Oakfield Drive & South Moon Avenue	NB L	—	0	0.00	0	— —
Oakfield Drive & South Moon Avenue	NB T	—	1	0.00	0	— —
Oakfield Drive & South Moon Avenue	NB R	—	0	0.00	0	— —
Oakfield Drive & South Moon Avenue	SB L	—	0	0.00	0	— —
Oakfield Drive & South Moon Avenue	SB T	—	356	0.47	178	— —
Oakfield Drive & South Moon Avenue	SB R	—	3	0.00	1	— —
Oakfield Drive & South Moon Avenue	WB L	—	4	0.00	1	— —
Oakfield Drive & South Moon Avenue	WB T	—	0	0.00	0	— —
Oakfield Drive & South Moon Avenue	WB R	—	352	0.47	175	— —
North Parsons Avenue & Victoria Street	NB L	—	178	0.96	243	— —
North Parsons Avenue & Victoria Street	NB T	—	812	0.80	882	— —
North Parsons Avenue & Victoria Street	NB R	—	0	0.00	0	— —
North Parsons Avenue & Victoria Street	SB L	—	0	0.00	0	— —
North Parsons Avenue & Victoria Street	SB T	—	811	0.80	880	— —
North Parsons Avenue & Victoria Street	SB R	—	178	0.17	118	— —
North Parsons Avenue & Victoria Street	EB L	—	178	0.48	215	— —
North Parsons Avenue & Victoria Street	EB T	—	0	0.00	0	— —
North Parsons Avenue & Victoria Street	EB R	—	178	0.48	215	— —
South Kings Avenue & West Brandon Boulevard	NB L	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	NB T	—	334	0.41	233	— —
South Kings Avenue & West Brandon Boulevard	NB R	—	190	0.23	121	— —
South Kings Avenue & West Brandon Boulevard	SB L	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	SB T	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	SB R	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	EB L	—	174	0.21	109	— —
South Kings Avenue & West Brandon Boulevard	EB T	—	2,897	3.58	2,963	— —
South Kings Avenue & West Brandon Boulevard	EB R	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	WB L	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	WB T	—	0	0.00	0	— —
South Kings Avenue & West Brandon Boulevard	WB R	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	NB L	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	NB T	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	NB R	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	SB L	—	136	0.17	84	— —
East Brandon Boulevard & Bryan Road	SB T	—	219	0.27	142	— —
East Brandon Boulevard & Bryan Road	SB R	—	0	0.00	0	— —

East Brandon Boulevard & Bryan Road	EB L	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	EB T	—	2,769	3.42	2,833	— —
East Brandon Boulevard & Bryan Road	EB R	—	136	0.17	84	— —
East Brandon Boulevard & Bryan Road	WB L	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	WB T	—	0	0.00	0	— —
East Brandon Boulevard & Bryan Road	WB R	—	0	0.00	0	— —

No lane group exceeds its imported bay storage under Build conditions.

9.0 TURN LANE EVALUATION (2027)

Turn-lane evaluation proceeds in two steps per FDM Chapter 212: first whether a turn lane is warranted at each affected approach (a function of the turning volume, opposing/through volume, and speed), and second — where a bay is warranted or already exists — whether its storage length is adequate for the projected queue.

9.1 Turn-Lane Warrants

A turn-lane warrant is a movement-level screen: an exclusive left-turn lane is evaluated against the FDM Chapter 212 / NCHRP 745 left-turn-lane guidelines (a function of advancing volume, opposing volume, and posted speed), and an exclusive right-turn lane is conventionally warranted where the peak-hour right-turn volume exceeds roughly 40-60 vph (or the applicable local threshold, e.g., Hillsborough County (Tampa) land-development code). The proposed development adds approximately 326 inbound and 354 outbound trips in the PM peak hour, distributed to the site driveways and adjacent intersections. This screening decomposes those project-added trips into left / through / right movements at each study intersection — outbound trips enter on the site-facing leg and turn toward their destination sector, inbound is the mirror — and reports the result in the "Affected movements" table within each intersection's capacity worksheet, where the movement volumes cross-foot with that junction's added-trip total. At the 7 intersection(s) listed in §8.1 an imported Synchro record supplied measured existing turning movements, so the warrant screen there applies to the total movement volume (existing plus project). Everywhere else the screening does not carry a measured EXISTING turning-movement split: warrant thresholds apply to the total movement volume (existing plus project), and only the project increment is decomposed. A definitive turn-lane warrant determination — particularly at the site driveways connecting to the SHS — therefore remains subject to the AM/PM turning-movement counts and the trip distribution approved at the methodology meeting.

9.2 Storage-Bay Adequacy

Where a turn bay is warranted or already present, its storage length must contain the Build-scenario 95th-percentile queue without spill-back into the adjacent through lane; a deficit indicates the bay is shorter than the projected queue and requires either a bay extension (where adjacent infrastructure permits) or a documented engineering finding that the spill-back is acceptable. Deceleration and taper lengths follow FDM Chapter 212.

Storage-bay adequacy: no intersection carries a field-measured existing storage length (`existingStorageFt``). Supply that field on each affected intersection record to enable the Required-vs-Existing-vs-Deficit turn-lane table per FDM Chapter 212 storage / taper standards. Turn-lane warrants at the site driveways must be evaluated against the assigned turning volumes at submittal.

10.0 CONCURRENCY ANALYSIS

Transportation concurrency was made optional statewide by HB 7207 (2011). For new development, the Development of Regional Impact (DRI) review track was further curtailed by SB 1216 / Ch. 2015-30 (which added F.S. 380.06(30) routing otherwise-DRI projects through the State Coordinated Review Process at F.S. 163.3184(4) in lieu of DRI), with cleanup completed by CS/CS/HB 1151 / Ch. 2018-158 — DRI is now a legacy branch retained only for amendments/abandonments of existing DRIs. Hillsborough County (Tampa) review framework: Mobility fee (replaced roadway impact fee in 2016). Controlling document(s): Hillsborough County Mobility Fee Ordinance + Mobility Fee Schedule (last full study 2020; update study begun early 2025) — methodology uses ITE 10th Ed. (2017) blended with the Florida Trip Characteristics Studies Database (Tindale Oliver / Stantec proprietary corpus; not an FDOT public asset).. LOS standard: Mobility-fee jurisdiction — no vehicle LOS pass/fail; SHS LOS D urbanized per FDOT Policy 000-525-006 applies on State Highway System frontage for

connection-permit review. Per Florida Statutes §163.3180(5)(h)1.a., local governments must consult with FDOT whenever a Strategic Intermodal System (SIS) facility is expected to be impacted by a comprehensive-plan amendment.

Note. Trip generation for the mobility-fee calculation should be prepared in parallel using the published Hillsborough fee schedule; the trip generation reported in this analysis follows public-data screening rates (NHTS 2017 / SANDAG 2002 / NCHRP 716) per MTSIH 2024 §3.5.

10.1 Roadway Segment Capacity — Generalized Service Volumes

Roadway-segment level of service is screened against the FDOT Quality/Level of Service Handbook v6.0 (August 2025) Generalized Service Volume Tables (GSVTs). Per Q/LOS v6.0 the peak-hour two-way service volume is keyed to FDM Chapter 200 context class (C1–C6, C2T) and through-lane count, with D = 0.55 statewide. The applicable context class and lane count for each segment are FDOT Roadway Characteristics Inventory (RCI) attributes (Feature 126 context class; lane count from the RCI flat file) and must be confirmed during the methodology meeting. This screening tool selects the GSVT row only where those inputs are supplied and otherwise defers the segment v/c rather than assume a class.

Arterial (signalized) peak-hour two-way service volumes (vph) — Q/LOS v6.0 App. B:

Context / lanes	LOS C	LOS D	LOS E
C3C (Suburban Commercial), 2-lane undivided	1,380	1,950	—
C4 (Urban General), 2-lane	1,310	1,710	—
C3C, 4-lane divided	2,760	3,290	—
C4, 4-lane divided	2,070	2,980	—
C3R (Suburban Residential), 4-lane divided	3,090	3,360	—
C3C, 6-lane divided	4,290	4,870	—
C4, 6-lane divided	3,850	4,560	—
C2T (Rural Town), 2-lane undivided	1,310	1,710	—
C5 (Urban Center), 4-lane	2,350	3,450	3,870
C5, 6-lane	2,560	4,850	5,650
C6 (Urban Core), 4-lane	—	2,710	3,490
C6, 6-lane	—	4,960	5,350

C6 LOS C is undefined in v6.0 (C6 facilities are neither planned nor designed for auto LOS C); cells marked "—" past LOS D are F at signal capacity. Material adjustment multipliers (one-way $\times 1.2$; multilane without exclusive LT $\times 0.75$; 2-lane undivided without exclusive LT $\times 0.80$; non-State signalized $\times 0.90$; exclusive RT lane $\times 1.05$) and per-context K factors (C1/C2/C2T 8.5–10.5%; C3C/C3R/C4 7.5–9.5%; C5/C6 7.0–9.0%) apply per Q/LOS v6.0 Ch. 6. Freeway (Limited Access) GSVT LOS-D capacities: Urbanized 4/6/8-lane = 7,400 / 11,050 / 14,710 vph (AADT-equivalent 82,200 / 122,800 / 163,400); Rural 4-lane divided = 5,950 vph (AADT-equivalent 56,700).

Per-segment GSVT v/c is not computed for this run: a segment context class (C1–C6 / C2T) and through-lane count were not supplied. Provide them as inputs — or rely on the FDOT RCI data adapter once wired — to populate the roadway-segment LOS table against the service volumes above. Segment AADT available to the screen is listed in §4.0.

10.2 Site Access / Ingress-Egress

Per MTSIH 2024 §3.2 Table 5, driveway TIA-scoping is keyed to gross trips per day (including pass-by): Category A 1–20 vpd (single-family); B 21–600 (small multifamily / very small commercial); C 601–1,500 (small-mid retail / small office); D 1,501–4,000 (mid retail / mid office); E 4,001–15,000 (large retail / mixed-use); F 15,001–30,000 (very large mixed-use / mall); G $\geq 30,001$ (regional mall). Pre-application meeting + traffic study are required for Categories C–G (>600 vpd including pass-by). A connection-permit change-of-use is additionally triggered per F.S. 335.182(3)(b) when trip

generation increases by >25% AND >100 vpd vs. the existing use. Connection to the FDOT State Highway System requires a connection permit per Rule 14-96 F.A.C. (last amended April 2, 2023). Driveway spacing, median-opening spacing, and signal spacing are governed by the access-management class (Classes 1-7) assigned to the impacted SHS segment per Rule 14-97 F.A.C. and FDOT Procedure 525-030-155; the class is stored in the RCI as Feature 146 / ACMANCLS (codes 00-07; 99 = unclassified, interim standards in Rule 14-97.004(1) apply until assignment). Driveway geometry (W, R, F, Y, G, Driveway Length, S, I; Categories A-D in FDM Chapter 214, Categories E-F-G punt to FDM Chapter 212), turn-lane warrants, deceleration-lane length, and intersection sight distance must be designed to FDOT Design Manual (FDM 2026) standards; off-SHS connections on city/county facilities follow the Florida Greenbook. The access-management class for the impacted SHS facility should be confirmed against the FDOT-published Access Management TDA layer.

11.0 TRANSIT AND MOBILITY

11.1 Transit Service

No transit stops detected within 0.25 mi of the site via the live Transit.land / OSM Overpass query. Verify against the controlling transit agency's published GTFS feed (e.g., Broward County Transit, Miami-Dade Transit, MARTA, LYNX, JTA, HART) at the methodology meeting. If transit-mode reduction is applied to trip generation, the supporting service must be cited and an alternative-mode trip reduction memo retained in the methodology letter (Appendix A or C per jurisdiction).

11.2 Internal Circulation and Multimodal

Internal site circulation, parking access, and service-vehicle pathways depend on the final site plan and are not included in this screening-level analysis. Internal queuing at the principal driveway should be evaluated for adequate storage between the SHS edge of pavement and the first internal conflict point per FDM guidance. Pedestrian and bicycle connectivity to the surrounding network and to the transit stops above should be confirmed against FDM Chapter 222/223 (sidewalk / bicycle facilities).

12.0 CRASH ANALYSIS

Site-radius crash query against the FDOT SSO Crashes (All) public FeatureServer returned no records within 0.5 mi over the available data window (FDOT public extract is comprehensive through 2018-2019; post-2019 records require Signal4 Analytics agency login). A formal submittal must include the 3-year Crash Analysis Reporting (CAR) extract for the affected intersections — this screening tool's public-data path cannot supply that for current years.

13.0 PRELIMINARY SIGNAL WARRANT ANALYSIS

A preliminary traffic-signal warrant screening is performed against the MUTCD (2009 Edition, FDOT-adopted per the Florida Traffic Engineering Manual) warrants — Warrant 1 (Eight-Hour Vehicular Volume), Warrant 2 (Four-Hour Vehicular Volume), Warrant 3 (Peak Hour), Warrant 4 (Pedestrian), Warrant 5 (School Crossing), Warrant 6 (Coordinated Signal System), Warrant 7 (Crash Experience), and Warrant 8 (Roadway Network). A definitive warrant determination requires the full 8-hour approach-volume counts and the applicable engineering study; a signal is not justified on any single warrant alone without an engineering study demonstrating that a signal will improve the overall safety and/or operation of the intersection.

Based on the projected Build-condition operations, the following study locations should carry a full signal / control-modification warrant analysis (Warrants 1-3 with 8-hour counts, plus Warrant 7 where the §12.0 crash review indicates a correctable pattern) at submittal:

Study location	Build LOS	Δ delay (s)	Preliminary indication
West Brandon Boulevard & North Parsons Avenue	F	45.0	At/over LOS E — monitor
East Brandon Boulevard & Lithia Pinecrest Road	F	0.0	At/over LOS E — monitor

Study location	Build LOS	Δ delay (s)	Preliminary indication
North Parsons Avenue & Victoria Street	E	2.9	At/over LOS E — monitor
South Kings Avenue & West Brandon Boulevard	F	0.0	At/over LOS E — monitor
East Brandon Boulevard & Bryan Road	F	0.0	At/over LOS E — monitor

Preliminary indication is a screening flag from projected LOS/delay only, not a warrant determination. The site driveways connecting to the SHS must additionally be evaluated for signalization / turn-lane control against the assigned turning volumes and the access-management class per Rule 14-97 F.A.C.

14.0 CONCLUSIONS AND RECOMMENDATIONS

The proposed Hillsborough County Sample is projected to generate 6,800 daily trips (326 in / 354 out in the PM peak hour) at full build-out. Under Build (Scenario 3) conditions at opening year 2027, 0 study intersections are projected to drop a Level of Service grade and 5 operate at LOS E or F. The improvement alternatives identified in §7.1 should be advanced, and the applicable proportionate-share / mobility-fee obligation should be calculated per the controlling Hillsborough County (Tampa) ordinance to maintain the FDOT SHS LOS standard within the study network.

14.1 Findings

- Project will generate 6,800 new daily vehicle trips, with 680 during the PM peak hour (326 inbound / 354 outbound).
- Pass-by credit 30% and internal-capture credit 0% applied at the PM peak (25% of that credit at the AM and Saturday-midday periods, per the industry rule of thumb that off-peak shopping diverts less) before off-site assignment (standard pass-by methodology; ULI Internal Capture).
- Auto-mode share of 85% applied to external trips for Tampa MSA; 15% of generated trips are assumed to arrive by transit, walking, or cycling and do not load the off-site roadway network. Source: ACS 5-Year Estimates Table B08301 (US) or national-stats equivalent.
- Existing volumes were grown by 1.50%/yr over 1 year ($\times 1.01$) to the opening-year horizon.
- 7 signalized intersections fall within the study area; 0 are projected to drop at least one LOS grade in the opening year after build-out.
- 5 intersections are projected to operate at LOS E or F under the opening-year build condition and require formal mitigation per City of Tampa Transportation Division TIS guidance.
- Worst opening-year impact: West Brandon Boulevard & North Parsons Avenue — projected delay rises 45.0s (LOS F $\rightarrow$ F); 95th-pct queue 1146 ft on the critical approach.
- Largest projected delay change: 45.0s in the opening year (West Brandon Boulevard & North Parsons Avenue) and 48.0s in the design year (West Brandon Boulevard & North Parsons Avenue). The design-year figure is the larger; that difference is driven by background traffic growth over the design horizon, not by the development.
- Conclusions are reported at the applied screening assumptions. Discrete-scenario sensitivity at the formal TIA scoping meeting should test: trip-generation method (rate vs. fitted-curve equation); internal capture and pass-by credit variants; and a $\pm 0.5\%$ /yr background growth band around the applied value.

14.2 Programmed Projects

Committed-projects review should consult the FDOT Five-Year Work Program (<https://www.fdot.gov/workprogram>) and the controlling MPO/TPO Transportation Improvement Program (TIP) and Long Range Transportation Plan (LRTP). Programmed roadway and intersection improvements within the study area should be incorporated into the No-Build network. This screening analysis does not automatically integrate Work Program data; manual review is recommended for any submittal.

14.3 Professional Engineer Certification

A Florida TIS / MTIA deliverable must be signed and sealed by a Florida-licensed Professional Engineer per Florida Statutes Chapter 471 and Florida Administrative Code Rule 61G15-23.001. The cover and signature page of the formal submittal must bear the seal, signature, and date of the Engineer of Record.

14.4 Methodology Notes

- Trip generation uses public-data average rates (SANDAG 2002, corroborated by NHTS 2017 / NCHRP 716) for the selected land-use code, computed for AM peak, PM peak, Saturday midday, and daily totals. Saturday-midday rates are estimated as a published industry multiple of the PM peak rate by land-use category.
- Pass-by and internal-capture credits are applied in full at the PM peak (and at 25% of that credit fraction for the AM and Saturday-midday periods) per standard pass-by screening methodology and ULI Mixed-Use Internal Capture defaults; only the residual external vehicle trips are assigned to off-site intersections.
- Existing intersection volumes are grown to the opening-year horizon at the user-supplied annual growth rate (default 1.5%/yr) before the capacity analysis.
- Weather adjustment applies published rain/snow capacity-reduction factors as adopted in US traffic-engineering practice: clear 1.00, light rain 0.95, heavy rain 0.86, light snow 0.86, heavy snow 0.70. The factor multiplies the saturation flow at every intersection.
- Off-site impact is screened for all signalized intersections within the study radius (default 0.5 mi) using the four-step travel demand model (FHWA; NCHRP Report 716). Step 1 Trip Generation: public-data average rates (SANDAG 2002 / NHTS 2017 / NCHRP 716) give the site's external (post pass-by / internal-capture) productions. Step 2 Trip Distribution: the Caltran mass/distance gravity model — the Florida distribution standard (Caltran Engineering HCA Westside TIS) — allocates trips to surrounding zones by $T_j = (M_j / (d_j \cdot d_{site})) / \sum (M_x / (d_x \cdot d_{site}))$, where mass M_j is each signal's through-volume (destination-activity attraction proxy) and d_j is its straight-line distance from the site (site-zone distance normalizer $d_{site} = 1$). The normalized zone shares set the directional distribution and drive the project-trip assignment. Step 3 Mode Choice: a binary logit $P(\text{auto}) = 1 / (1 + e^{-(ASC - \lambda \cdot \Delta GC)})$ calibrated to the metro's auto-mode share — measured (ACS B08301) where the metro is wired, otherwise the ACS B08301 metropolitan median of 90% — and shifted by site urbanity (a density proxy from surrounding through-volumes) so denser, more transit-served sites split further from auto; only the resulting vehicle trips load the network. Step 4 Route Assignment: a capacity-constrained assignment using the BPR volume-delay function $t = t_0 \cdot [1 + 0.15 \cdot (v/c)^4]$ iteratively shifts trips away from over-capacity signals toward less-congested alternatives. Signals lacking AADT data fall back to a constant 5,000 vpd attraction.
- After assignment, all signalized intersections within the study radius are reported in the affected-intersections table. Project-added trips, v/c ratio change, control delay change, LOS change, and 95th-percentile queue are reported for each intersection so the reviewer can assess relative impact. Intersections beyond the study radius are excluded from analysis.
- Auto-mode share is applied per metro before assignment. Suburban-US metros default to 90% auto (ACS 5-Year B08301 median); transit-heavy metros use measured auto-mode share (e.g., NYC 32%, Tokyo 30%, London 38%, San Francisco 47%). Non-auto trips (transit, walking, cycling) do not load the off-site roadway. This is a screening-level adjustment; a real TIS submittal in a transit-heavy market should refine with project-specific TAZ data.
- Candidate signals are de-duplicated within a 45m clustering threshold to prevent OSM divided-arterial splits and way-record artifacts from double-counting a single physical intersection.
- Intersection-level control delay uses the standard signalized-intersection model $d = d_1 + d_2$ (Webster uniform delay + Akçelik time-dependent incremental-delay term, both openly published) with each intersection's own cycle length and green splits from the signal-timing resolver — a client Synchro record's measured cycle and per-phase splits where the record carries them, otherwise a Webster optimum cycle (60–120 s) with Critical Movement Method splits derived from the no-build approach volumes (FHWA-HOP-07-006), a protected-left phase where the FHWA-HRT-04-091 cross product of left-turn and opposing through volume warrants one, and a pedestrian minimum green from the crossing width; timing is resolved once from no-build volumes and held fixed across every scenario, approach capacity is 1,800 vphpl saturation flow $\times$ that phase's g/C ($\times$ weather factor), and an intersection at or beyond saturation ($Y \geq 0.85$) reports the flat 90s / g/C 0.45 screening default instead, 15-minute peak analysis period ($T = 0.25$ hr) and pretimed-signal incremental-delay factor $k = 0.5$. Reported control delay is capped at 300 s (LOS F) for screening reliability — the incremental-delay term is not calibrated far above capacity, so oversaturated approaches are reported as LOS F rather than an implausible delay figure; a calibrated design-level analysis (HCS / Synchro) supersedes this screen.
- Approach-level analysis splits each signal's inflow across NB/SB/EB/WB approaches (each leg from its own volume: the signal's design hour on the two main-road legs — its counted volume where the analyzer joined a compatible count, else the road-class baseline it assigned; each worksheet says which — half per direction, and half in the physical direction of a one-way carriageway; the road-class baseline on uncounted minor legs; a client link count where supplied — each worksheet states the source per leg. Turning movements are then balanced to the exit legs by iterative proportional fitting from a geometry seed, the refinement method of NCHRP Report 255 / NCHRP Report 765, so entries equal exits at every resolved junction; a junction that does not resolve to the road network keeps the screening allocation and says so) and assigns added trips to each approach by cosine-similarity to the bearing of the project relative to the signal. Per-approach v/c, control delay, LOS, and 95th-percentile back-of-queue length (standard cyclic-queue relation with Poisson percentile factor: $Q_{95} \approx Q_1 \times 1.65 \times 25 \text{ ft/veh}$) are reported.

- Level of Service is assigned from the conventional US signalized control-delay bands republished in state DOT traffic-engineering manuals: A $\leq 10s$, B $\leq 20s$, C $\leq 35s$, D $\leq 55s$, E $\leq 80s$, F $> 80s$.
- Sensitivity is reported in narrative form per standard TIA practice: trip-generation method (rate vs. fitted-curve equation), discrete internal capture and pass-by credit variants, and a $\pm 0.5\%/yr$ growth-rate band around the applied value. The engine retains an internal stochastic-sensitivity routine (Box-Muller-perturbed trip rate and existing volume) for demo-mode diagnostics; it is not surfaced in the deliverable because TIA sensitivity is conducted through discrete scoping-agreed scenario variants, not statistical perturbation of unmeasured distributions.
- Mitigations are screening-level recommendations sized to the projected delay change, not full Synchro/SimTraffic optimization runs. A formal TIS submittal should validate these recommendations with detailed traffic counts and signal-timing analysis.
- Turbo-lane (continuous-green-T) screening flags signalized 3-leg T-intersections where one or more main-street through lanes could flow continuously while the minor-street left turn merges in the median — recovering the green time the through movement would otherwise lose to the signal. Candidacy requires measured 3-leg geometry, an arterial-class main street, and a detected median (divided carriageway), all derived from the OpenStreetMap road network. Approach-capacity gain is computed as $(\text{turbo lanes} / \text{approach lanes}) \times (1 - g/C) / (g/C)$, with the main-street through g/C derived from the modeled main-vs-minor critical-flow split; the result is reported within the $+7\% \dots +173\%$ envelope documented in the continuous-green-T design literature — the standard national references for this geometry (David Plummer & Associates, Adding Turbo Lanes to T-Intersections, 2010; and the Design Guidelines for the Development of Continuous Green Intersections, 1997). Lane counts and signal timing must be field-verified before design.

FOUR-STEP TRAVEL DEMAND MODEL

Off-site project trips are distributed and assigned with the four-step urban transportation modeling process (FHWA; NCHRP Report 716, Travel Demand Forecasting). Each step below shows what the engine computed for this site.

Step 1 — Trip Generation

Public-data screening trip rates (SANDAG 2002, corroborated by NHTS 2017 / NCHRP 716) applied to the proposed land use give the site's productions.

Land use	LU 820 — Shopping Center / Retail
Size	85 1,000 sqft GLA
Daily trips (productions)	6,800
PM peak-hour trips	680 (326 in / 354 out)

Step 2 — Trip Distribution (Gravity Model)

The Caltran mass/distance gravity model (the Florida distribution standard, §6.1) allocates trips to surrounding zones: $T_j = (M_j / (d_j \cdot d_{site})) / \sum (M_x / (d_x \cdot d_{site}))$. Zone mass M_j is each signal's through-volume (destination-activity proxy) and d_j its distance from the site ($d_{site} = 1$). The shares below are the §6.1 distribution.

Signal (attraction zone)	Dist mi	Time min	PM trips	Share
West Brandon Boulevard & North Parsons Avenue	0.01	0.1	204	38.6%
East Brandon Boulevard & Lithia Pinecrest Road	0.26	0.6	202	38.3%
East Brandon Boulevard & Bryan Road	0.50	1.2	51	9.7%
South Kings Avenue & West Brandon Boulevard	0.49	1.2	27	5.1%
North Parsons Avenue & Victoria Street	0.44	1.1	23	4.4%
South Parsons Avenue & Oakfield Drive	0.25	0.6	13	2.5%
Oakfield Drive & South Moon Avenue	0.30	0.7	8	1.5%

Top 12 distribution zones by assigned PM-peak trips shown; the full set is in the capacity appendix.

Step 3 — Mode Choice

Auto-mode share 85% applied via a binary logit $P(\text{auto}) = 1 / (1 + e^{-(ASC - \lambda \cdot \Delta GC)})$ calibrated to the metro's auto-mode share — measured (ACS B08301) where the metro is wired, otherwise the ACS B08301 metropolitan median of 90% — and shifted by site urbanity (local density), so a denser, more transit-served site splits further from auto than a greenfield parcel in the same metro. The remaining 15% of trips (transit, walking, cycling) do not load the off-site roadway network; only auto trips are carried into Step 4.

Step 4 — Route Assignment

Project trips are routed over the local road network by shortest path and loaded with a capacity-constrained BPR equilibrium (volume-delay $t = t_0 \cdot [1 + 0.15 \cdot (v/c)^4]$, Method of Successive Averages), so congested links shift trips toward alternative routes. 100% of study signals lie on a modeled route; highest loaded-link v/c: 0.32. Corridors carrying the project trips:

Corridor (road class)	Loaded length mi	PM project vph	v/c
Trunk highway	1.15	406	0.26
Collector	0.51	328	0.32
Minor arterial	0.46	125	0.32

Network shortest-path assignment over the OSM road graph within the study area; per-signal v/c, delay, LOS, and queue are in the capacity appendix.

Conserved assignment: project trips routed to 12 cordon gateways on the study boundary (weighted by the directional distribution above). Flow conservation verified at render input: Σ entering = Σ leaving at 157 network junctions, max imbalance 0.00 veh. 5 study intersection(s) carry path-derived movements; 2 retain the geometric octant model (labeled per intersection).

APPENDIX — INTERSECTION CAPACITY ANALYSIS WORKSHEETS

One worksheet per study intersection: a turning-movement diagram for each analyzed peak period plus the per-approach capacity table. Analysis uses the openly-published Webster/Akcelik signalized control-delay method; v/c , control delay (sec/veh), Level of Service, and 95th-percentile back-of-queue (ft) are reported for the Existing (No-Build) and Build conditions.

Study scope: 7 signalized intersections lie within the 0.5-mile study area, and all 7 are carried as study intersections. The regional signal inventory holds 13 records inside that radius; 6 were merged into a junction already counted, because a signalized junction is commonly recorded once per approach rather than once per intersection. Merged records are duplicates of an analyzed intersection, not intersections omitted from the study.

Background approach volumes are resolved per leg — the signal's design hour on the main road (its counted volume where the analyzer had a compatible count, else the road-class baseline it assigned — each worksheet says which), the road-class baseline on uncounted legs, client link counts where supplied; half per direction, and half in the physical direction of a one-way carriageway — and the background turning movements in the diagrams are balanced to the exit legs by iterative proportional fitting (NCHRP 255/765 refinement) from a geometry seed; each worksheet states its leg sources and residual. Project-trip movements are assigned geometrically from the study's directional trip distribution (see each worksheet's Affected movements table). Replace both with measured turning-movement counts (TMCs) before a formal submittal.


A.1 West Brandon Boulevard & North Parsons Avenue

Signal ID	tampa-2140313633
Location	SE Tampa · 0.01 mi from site
Added PM peak trips	204
Existing / No-Build (PM)	LOS F · 89.7 s/veh · v/c 1.11
Build (PM)	LOS F · 134.7 s/veh · v/c 1.22
Δ control delay	+45.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +45.0s, design year +48.0s).

Signal timing: the generic 90 s / g/C 0.45 screening default — critical flow ratio 0.88 puts this intersection at or beyond saturation, where Webster is not applicable — 90 s cycle, 2 critical phases; g/C NS 0.45 / EW 0.45; permissive NS / permissive EW left-turn phasing (screening default); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 4 from the signal's counted design hour (half per direction); 2 of 4 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 6 iterations, residual 0.2 vph). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)

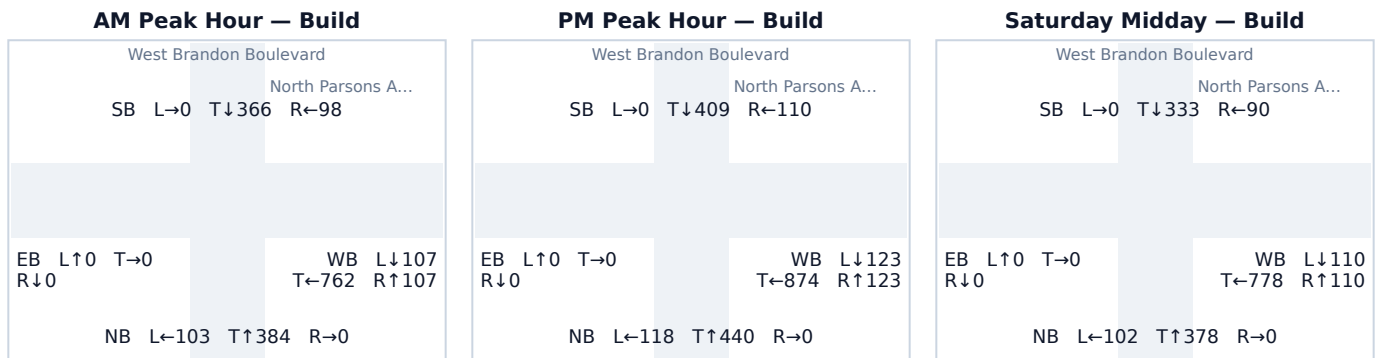

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	→ WB leg	Σ entering
NB approach	—	394	106	0	500
SB approach	394	—	106	0	500
EB approach	0	0	—	0	0
WB approach	106	106	751	—	963
Σ exiting	500	500	963	0	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	508	50	558	0.63 → 0.69	22.6 → 24.5	C → C	458
SB	508	11	519	0.63 → 0.64	22.6 → 23.0	C → C	413
EB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0
WB	977	143	1,120	1.21 → 1.38	129.1 → 204.5	F → F	1,146

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
WB Through	143	70%
NB Left	38	19%
NB Through	12	6%
SB Right	11	5%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.


A.2 North Parsons Avenue & Victoria Street

Signal ID	tampa-97791442
Location	SE Tampa · 0.44 mi from site
Added PM peak trips	23
Existing / No-Build (PM)	LOS E · 59.0 s/veh · v/c 1.02
Build (PM)	LOS E · 61.9 s/veh · v/c 1.03
Δ control delay	+2.9 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: design year (opening year +2.9s, design year +4.5s).

Signal timing: a Webster optimum cycle with Critical Movement Method splits derived from the no-build approach volumes (FHWA-HOP-07-006) — 120 s cycle, 3 critical phases; g/C NS 0.57 / EW 0.21 (NS left 0.10); protected NS / permissive EW left-turn phasing (inferred from the FHWA-HRT-04-091 cross product of left-turn and opposing through volume); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 3 from the signal's counted design hour (half per direction); 1 of 3 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 2 iterations, residual 0.1 vph).

Turning-Movement Diagrams (Build condition)

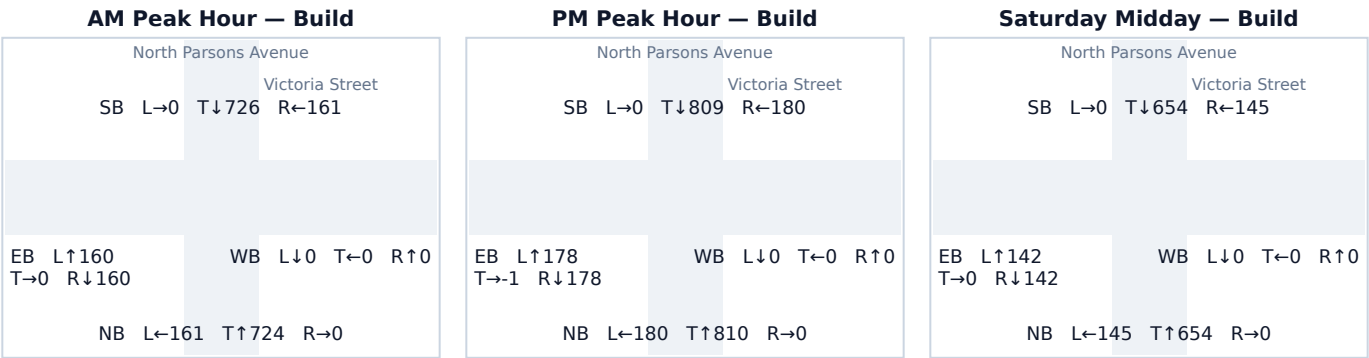

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	Σ entering
NB approach	—	788	175	963
SB approach	788	—	175	963
EB approach	175	175	—	350
Σ exiting	963	963	350	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	977	12	990	0.96 → 0.97	44.6 → 47.0	D → D	1,311
SB	977	11	989	0.96 → 0.97	44.6 → 46.8	D → D	1,308
EB	355	0	355	0.96 → 0.96	84.6 → 84.6	F → F	483
WB	0	0	0	0.00 → 0.00	37.8 → 37.8	D → D	0

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
NB Through	12	52%
SB Through	11	48%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.


A.3 South Parsons Avenue & Oakfield Drive

Signal ID	tampa-4108448608
Location	SE Tampa · 0.25 mi from site
Added PM peak trips	13
Existing / No-Build (PM)	LOS A · 6.5 s/veh · v/c 0.29
Build (PM)	LOS A · 6.5 s/veh · v/c 0.30
Δ control delay	+0.0 s/veh
Mitigation	No mitigation indicated at screening level (opening year +0.0s, design year +0.0s). The largest projected delay change is below the 5-second screening threshold — a screening default, not an agency criterion: no jurisdiction was resolved for this site. The governing agency's TIS criteria supersede this, and typically add a v/c test and a separate clause for approaches already failing in the no-build; neither is screened here.

Signal timing: a Webster optimum cycle with Critical Movement Method splits derived from the no-build approach volumes (FHWA-HOP-07-006) — 60 s cycle, 2 critical phases; g/C NS 0.60 / EW 0.23; permissive NS / permissive EW left-turn phasing (inferred from the FHWA-HRT-04-091 cross product of left-turn and opposing through volume); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/l_n × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 3 from the analyzer's baseline volume for this signal (no compatible count — road-class or synthetic); 1 of 3 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 1 iterations, residual 0.0 vph; exits scaled to entries, 50% imbalance). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)

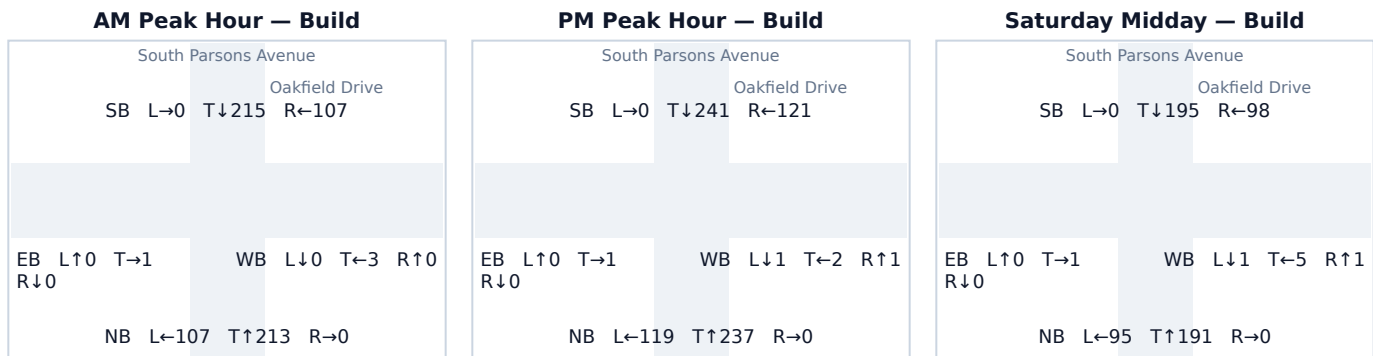

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	Σ entering
NB approach	—	233	117	350
SB approach	233	—	117	350
EB approach	0	0	—	0
Σ exiting	233	233	233	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	355	1	356	0.33 → 0.33	6.7 → 6.7	A → A	121
SB	355	7	362	0.33 → 0.33	6.7 → 6.8	A → A	124
EB	0	1	1	0.00 → 0.00	17.7 → 17.8	B → B	0
WB	0	4	4	0.00 → 0.01	17.7 → 17.8	B → B	2

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
SB Left	5	38%
WB Right	4	31%
SB Through	1	8%
NB Through	1	8%
SB Right	1	8%
EB Left	1	8%

Source: geometric octant model (this signal did not resolve to a junction on the modeled road network — no junction within 100 m, or its minor legs are below the network's road-class floor).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.


A.4 East Brandon Boulevard & Lithia Pinecrest Road

Signal ID	tampa-97933230
Location	SE Tampa · 0.26 mi from site
Added PM peak trips	202
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 2.33
Build (PM)	LOS F · 300.0 s/veh · v/c 2.44
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

Signal timing: the generic 90 s / g/C 0.45 screening default — critical flow ratio 2.15 puts this intersection at or beyond saturation, where Webster is not applicable — 90 s cycle, 2 critical phases; g/C NS 0.45 / EW 0.45; permissive NS / permissive EW left-turn phasing (screening default); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 4 from the signal's counted design hour (half per direction); 2 of 4 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 6 iterations, residual 0.3 vph). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)

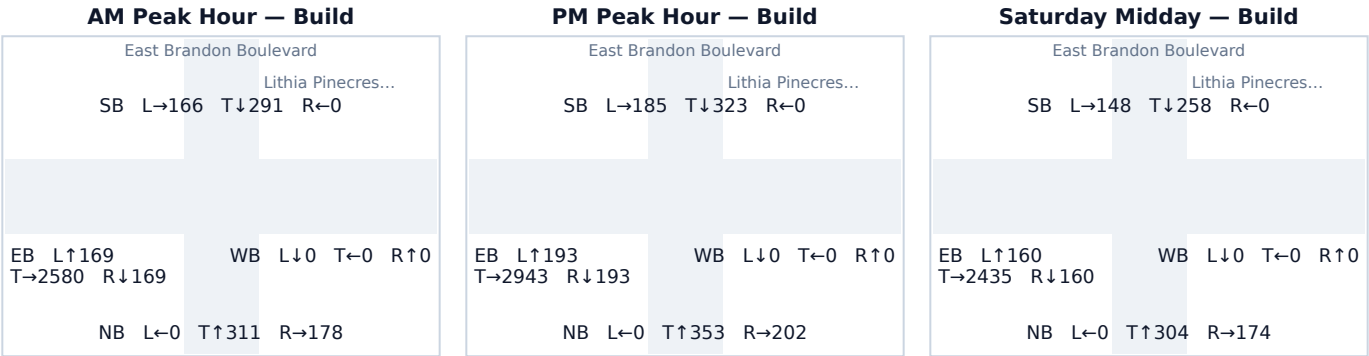

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	→ WB leg	Σ entering
NB approach	—	318	0	182	500
SB approach	318	—	0	182	500
EB approach	182	182	—	2,763	3,128
WB approach	0	0	0	—	0
Σ exiting	500	500	0	3,127	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	508	48	555	0.63 → 0.69	22.6 → 24.4	C → C	455
SB	508	0	508	0.63 → 0.63	22.6 → 22.6	C → C	401
EB	3,174	154	3,329	3.92 → 4.11	300.0 → 300.0	F → F	3,405
WB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	103	51%
EB Right	51	25%
NB Through	48	24%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.


A.5 Oakfield Drive & South Moon Avenue

Signal ID	tampa-4108448617
Location	SE Tampa · 0.30 mi from site
Added PM peak trips	8
Existing / No-Build (PM)	LOS B · 14.2 s/veh · v/c 0.43
Build (PM)	LOS B · 14.2 s/veh · v/c 0.43
Δ control delay	+0.0 s/veh
Mitigation	No mitigation indicated at screening level (opening year +0.1s, design year +0.1s). The largest projected delay change is below the 5-second screening threshold — a screening default, not an agency criterion: no jurisdiction was resolved for this site. The governing agency's TIS criteria supersede this, and typically add a v/c test and a separate clause for approaches already failing in the no-build; neither is screened here.

Signal timing: a Webster optimum cycle with Critical Movement Method splits derived from the no-build approach volumes (FHWA-HOP-07-006) — 60 s cycle, 2 critical phases; g/C NS 0.42 / EW 0.42; permissive NS / permissive EW left-turn phasing (inferred from the FHWA-HRT-04-091 cross product of left-turn and opposing through volume); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln $\times$ that phase's g/C $\times$ through lanes $\times$ weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 3 from the analyzer's baseline volume for this signal (no compatible count — road-class or synthetic); 1 of 3 from the road-class baseline (no count on that leg). Turning movements: did not balance within 50 iterations (residual 3.4 vph; rows held exact). 1 extra leg not carried (4 $\times$ 4 matrix). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)

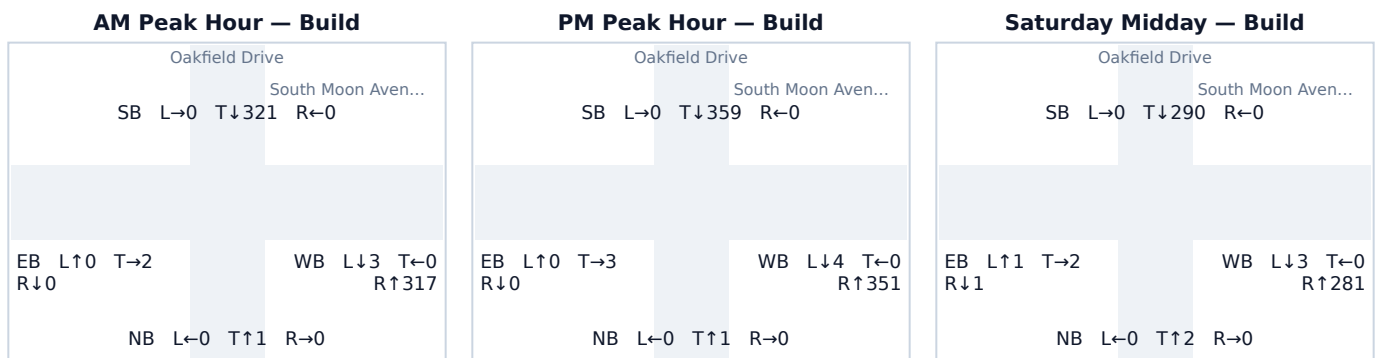

Background turning-movement volumes vary by period: the stored design-hour count (AADT $\times$ K-factor, $\approx$ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ WB leg	Σ entering
NB approach	—	0	0	0
SB approach	350	—	0	350
WB approach	3	347	—	350
Σ exiting	353	347	0	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	0	1	1	0.00 → 0.00	10.2 → 10.2	B → B	1
SB	355	4	359	0.47 → 0.48	14.9 → 14.9	B → B	180
EB	0	3	3	0.00 → 0.00	10.2 → 10.2	B → B	1
WB	355	0	355	0.47 → 0.47	14.9 → 14.9	B → B	178

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
SB Right	3	38%
EB Left	3	38%
SB Through	1	13%
NB Through	1	13%

Source: geometric octant model (this signal did not resolve to a junction on the modeled road network — no junction within 100 m, or its minor legs are below the network's road-class floor).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.

A.6 South Kings Avenue & West Brandon Boulevard

Signal ID	tampa-2901567852
Location	SE Tampa · 0.49 mi from site
Added PM peak trips	27
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.98
Build (PM)	LOS F · 300.0 s/veh · v/c 2.00
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

Signal timing: the generic 90 s / g/C 0.45 screening default — critical flow ratio 1.98 puts this intersection at or beyond saturation, where Webster is not applicable — 90 s cycle, 2 critical phases; g/C NS 0.45 / EW 0.45; permissive NS / permissive EW left-turn phasing (screening default); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 4 from the signal's counted design hour (half per direction); 2 of 4 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 7 iterations, residual 0.2 vph). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)



Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	→ WB leg	Σ entering
NB approach	—	329	0	171	500
SB approach	0	—	0	0	0
EB approach	0	171	—	2,844	3,015
WB approach	0	0	0	—	0
Σ exiting	0	500	0	3,015	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	508	17	524	0.63 → 0.65	22.6 → 23.2	C → C	420
SB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0
EB	3,060	10	3,071	3.78 → 3.79	300.0 → 300.0	F → F	3,141
WB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
NB Right	17	63%
EB Through	10	37%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.


A.7 East Brandon Boulevard & Bryan Road

Signal ID	tampa-7246510380
Location	SE Tampa · 0.50 mi from site
Added PM peak trips	51
Existing / No-Build (PM)	LOS F · 300.0 s/veh · v/c 1.78
Build (PM)	LOS F · 300.0 s/veh · v/c 1.81
Δ control delay	+0.0 s/veh
Mitigation	Major: add a dedicated turn lane on the critical approach AND retime the signal; reconsider site driveway alignment or development scale if delay remains above 80s. Governing horizon: opening year (opening year +0.0s, design year +0.0s).

Signal timing: the generic 90 s / g/C 0.45 screening default — critical flow ratio 1.78 puts this intersection at or beyond saturation, where Webster is not applicable — 90 s cycle, 2 critical phases; g/C NS 0.45 / EW 0.45; permissive NS / permissive EW left-turn phasing (screening default); pedestrian minimum green 14 s NS / 14 s EW. Timing is resolved once from the no-build volumes and held fixed across scenarios; approach capacity is 1,800 pc/h/ln × that phase's g/C × through lanes × weather factor (one through lane per approach — no lane count was available).

Leg volumes: 2 of 4 from the signal's counted design hour (half per direction); 2 of 4 from the road-class baseline (no count on that leg). Turning movements: balanced estimate (Furness/IPF, 7 iterations, residual 0.1 vph). A one-way carriageway carries half of the two-way count in its direction (a one-way couplet street is understated).

Turning-Movement Diagrams (Build condition)

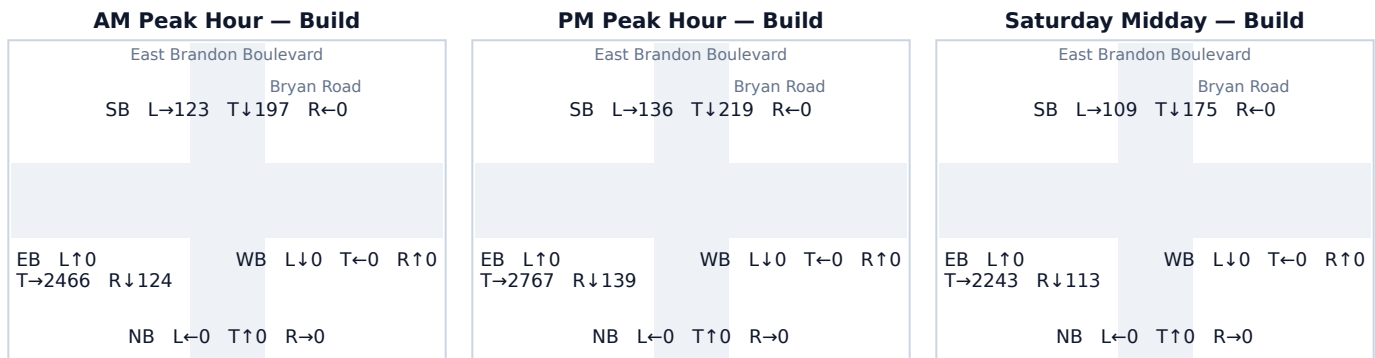

Background turning-movement volumes vary by period: the stored design-hour count (AADT × K-factor, ≈ the PM peak) is carried at 100% for the PM peak and at screening-level shares of the design hour for the AM peak (90%) and Saturday midday (80%), reflecting that the network is not equally loaded across the day. A submitted study replaces these with measured per-period turning-movement counts.

Balanced turning movements (vph)	→ NB leg	→ SB leg	→ EB leg	→ WB leg	Σ entering
NB approach	—	0	0	0	0
SB approach	216	—	0	134	350
EB approach	134	0	—	2,678	2,813
WB approach	0	0	0	—	0
Σ exiting	350	0	0	2,812	

Design-hour basis — existing year, before growth and period scaling, so it is identical for every analysis period and will not tie to the grown No-Build volumes above. Columns are the leg each movement exits through; the diagonal (U-turn) is folded into the left turn. Entries equal exits at this junction within the stated residual.

Per-Approach Capacity (PM Peak)

Appr.	NB vph	+Trips	Build vph	v/c NB→Bld	Delay NB→Bld	LOS NB→Bld	Q95 ft
NB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0
SB	355	0	355	0.44 → 0.44	18.7 → 18.7	B → B	251
EB	2,855	51	2,906	3.52 → 3.59	300.0 → 300.0	F → F	2,973
WB	0	0	0	0.00 → 0.00	13.6 → 13.6	B → B	0

NB = No-Build: existing counts grown to the opening year, without project trips. Build = No-Build plus assigned project trips. Current-year Existing conditions appear in the scenario tables of the main report body.

Affected movements (PM peak project trips)

Movement	Project trips	% of project trips
EB Through	51	100%

Source: routed network paths through this junction (conserved assignment — the trips in these rows are the same vehicles counted at the adjacent studied junctions along their paths).

Movement loads are derived from the study's directional trip distribution and the site's bearing from this intersection (outbound trips enter from the site leg and turn toward their destination sector; inbound trips mirror). U-turns are folded into the left-turn movement. The same assignment drives the per-approach capacity loading above, so the movement rows cross-foot with the junction's added project trips in total and with the +Trips column approach-by-approach (each trip is counted on its entering approach). The turning-movement diagrams show TOTAL approach volumes under the screening 15/70/15 split, not the project increment. Screening-level: replace with measured turning-movement counts and the site's access-point routing at submittal.